

# FISHER & PAYKEL

## DATA SHEET 18" Integrated Column Freezer


Model nos:

**RS1884FRJ1 / RS1884FRJK1**

NOTE: Left hand hinge model is a mirrored version of image shown.

**RS1884FLJ1 / RS1884FLJK1**

(refer page 2 for metric measurements)

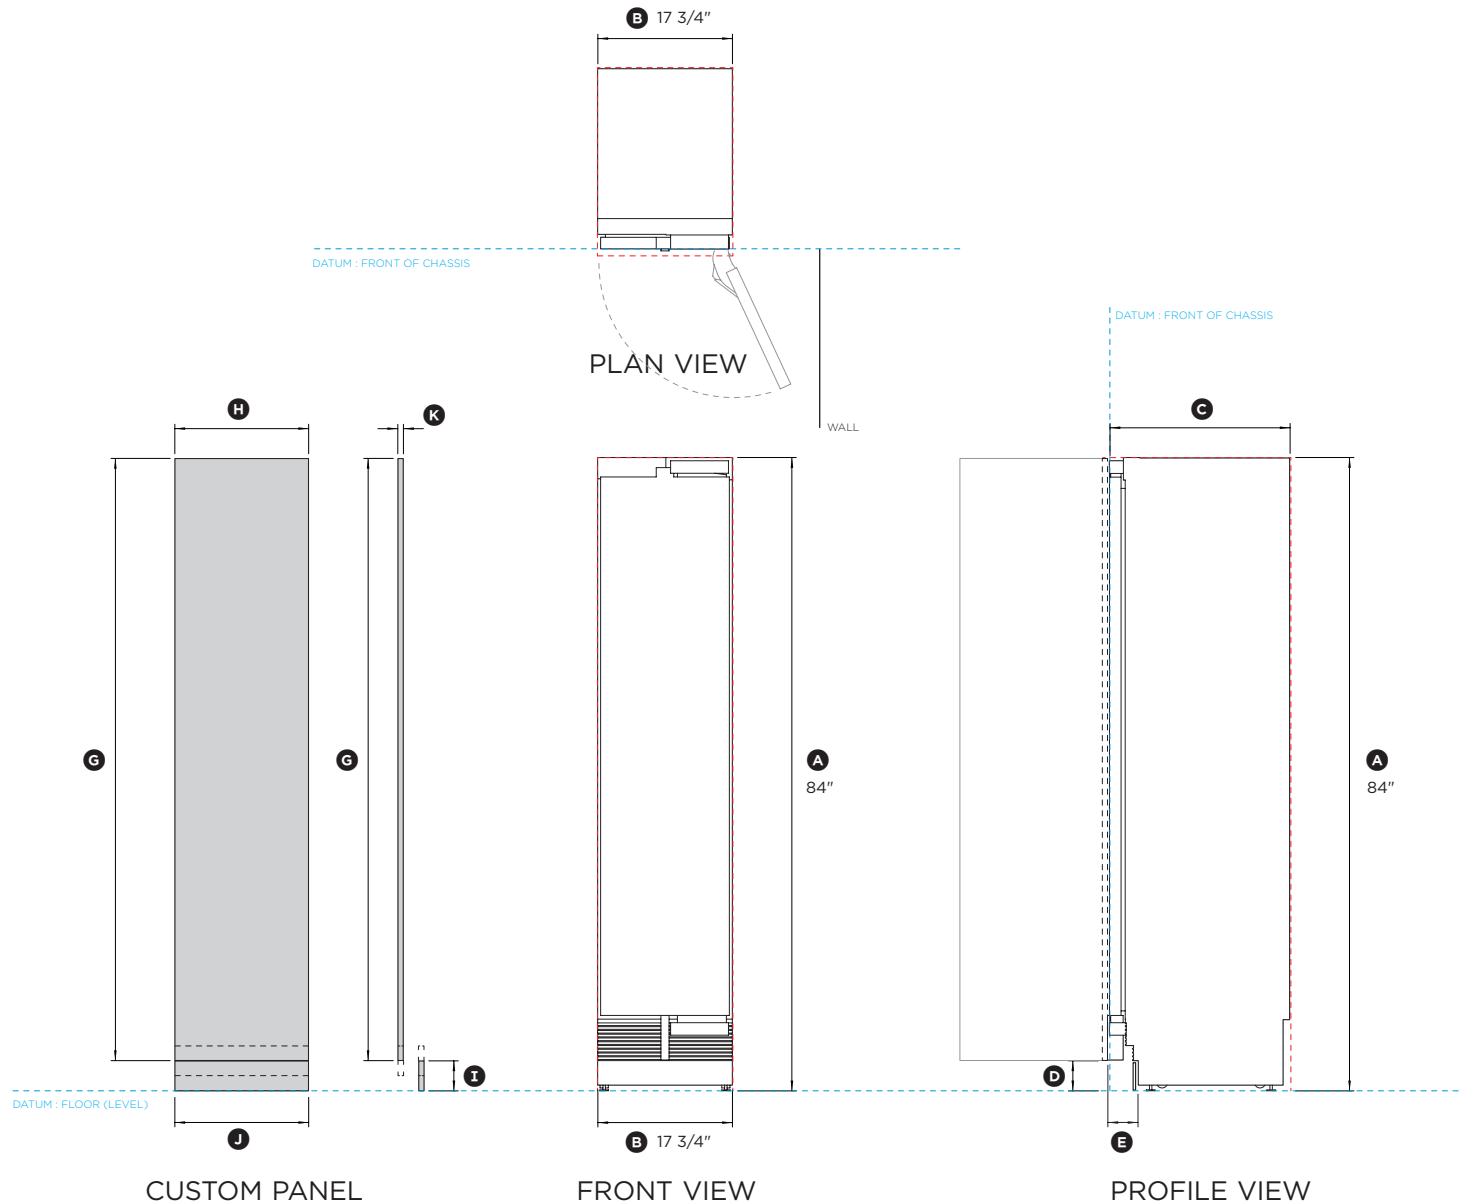

| Product Dimensions                                       | in            |
|--|---------------|
| Ⓐ Overall height of product                              | 84"           |
| Ⓑ Overall width of product                               | 17 3/4"       |
| Ⓒ Overall depth of product (excl. front door panels)     | 24"           |
| Ⓓ Height from bottom datum to bottom of door             | 2" - 6"       |
| Ⓔ Depth of toekick (excl. door front and toekick panels) | 2 11/16" - 4" |

| Custom Panel Dimensions*   | in                   |
|--|----------------------|
| Ⓔ Height of door panel   | 77 7/8"<br>- 81 7/8" |
| Ⓕ Width of door panel - single install<br>Width of door panel - dual install | 17 3/4"<br>17 13/16" |
| Ⓖ Height of custom toekick panel**   | 2" - 6"              |
| Ⓙ Width of custom toekick panel  | 17 7/8"              |
| Ⓚ Depth of custom panels   | min 5/8"<br>- max 1" |
| Maximum weight of door panel (including handle***)                           | 44lbs                |

\* Custom panels to be manufactured & fitted by cabinetmaker

\*\* 3 15/16" tall stainless steel toekick panel available. Adjust the height of the door panel accordingly.

\*\*\* Door handle kit is available as an optional accessory.

| Clearance Dimensions  | in      |
|---|---------|
| Minimum cabinetry gap clearance from edge of door panel               | 1/8"    |
| Overall height of cavity  | 84"     |
| Overall width of cavity   | 18"     |
| Minimum depth of cavity   | 25"     |
| Minimum door clearance to adjacent wall (115° - full internal access) | 11 1/2" |
| Minimum door clearance at 90° open, measured from front of door       | 20"     |

INDICATES CAVITY CLEARANCES -----  
INDICATES PRODUCT DATUM - - - - -

DATE: 10.10.2018

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](http://fisherpaykel.com)



# FISHER & PAYKEL

## DATA SHEET 18" Integrated Column Freezer


Model nos:

**RS1884FRJ1 / RS1884FRJK1**

NOTE: Left hand hinge model is a mirrored version of image shown.

**RS1884FLJ1 / RS1884FLJK1**

(refer page 1 for imperial measurements)

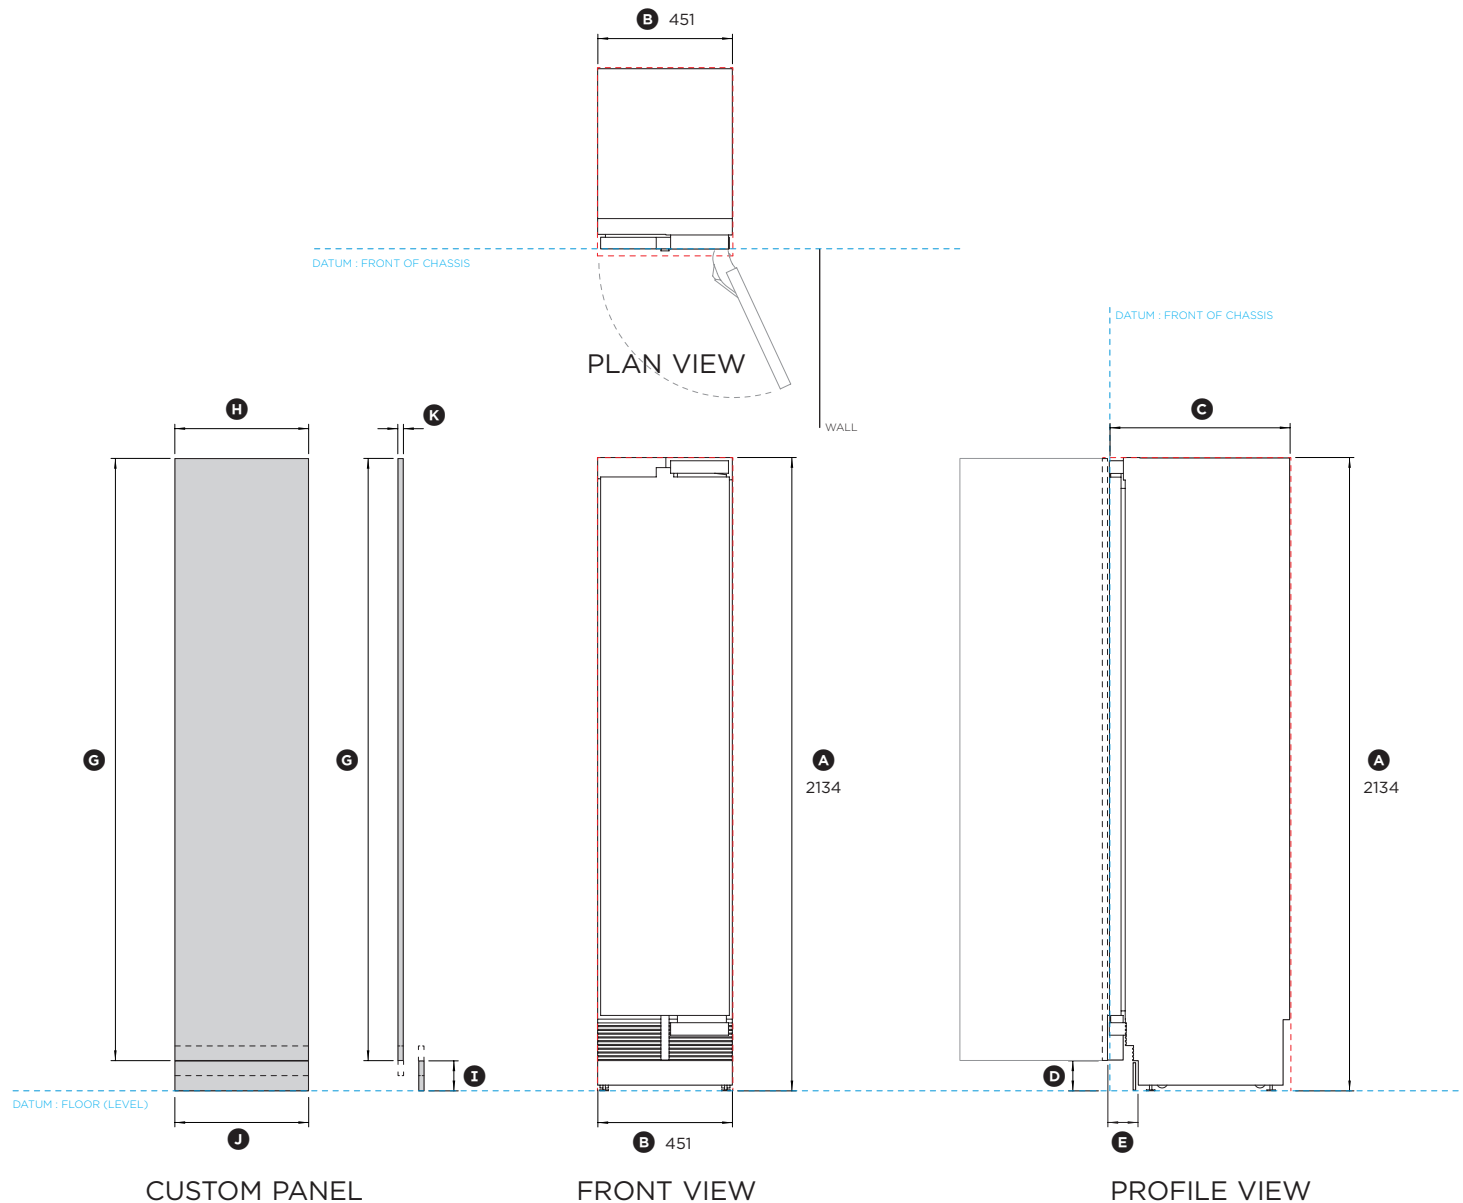

| Product Dimensions                                       | mm       |
|--|----------|
| Ⓐ Overall height of product                              | 2134     |
| Ⓑ Overall width of product                               | 451      |
| Ⓒ Overall depth of product (excl. front door panels)     | 610      |
| Ⓓ Height from bottom datum to bottom of door             | 50 - 152 |
| Ⓔ Depth of toekick (excl. door front and toekick panels) | 68 - 101 |

| Custom Panel Dimensions*   | mm               |
|--|------------------|
| Ⓔ Height of door panel   | 1978<br>- 2080   |
| Ⓐ Width of door panel - single install<br>Width of door panel - dual install | 451<br>452.5     |
| Ⓓ Height of custom toekick panel**   | 50 - 152         |
| Ⓓ Width of custom toekick panel  | 454              |
| Ⓐ Depth of custom panels   | min 16<br>max 25 |
| Maximum weight of door panel (including handle***)                           | 20kg             |

\* Custom panels to be manufactured & fitted by cabinetmaker

\*\* 100mm tall stainless steel toekick panel available. Adjust the height of the door panel accordingly.

\*\*\* Door handle kit is available as an optional accessory.

| Clearance Dimensions  | mm   |
|---|------|
| Minimum cabinetry gap clearance from edge of door panel               | 3    |
| Overall height of cavity  | 2134 |
| Overall width of cavity   | 457  |
| Minimum depth of cavity   | 635  |
| Minimum door clearance to adjacent wall (115° - full internal access) | 292  |
| Minimum door clearance at 90° open, measured from front of door       | 508  |

INDICATES CAVITY CLEARANCES -----  
INDICATES PRODUCT DATUM - - - - -

DATE: 10.10.2018

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [fisherpaykel.com](http://fisherpaykel.com)

0 100 200 400  
millimetres