

FISHER & PAYKEL

DATA SHEET


18" Freezer + 24" Fridge - Custom Panel Integrated Columns

Model no:

RS1884FLJ1/ RS1884FLJK1 + RS2484SR1/ RS2484SR1 shown.
(Various models available to swap units to opposite sides, hinge doors both left, both right or at the outsides as shown here).
(refer page 2 for metric measurements)

IMPORTANT!

For ease of installation, ensure cavity has consistent dimensions top to bottom and left to right.

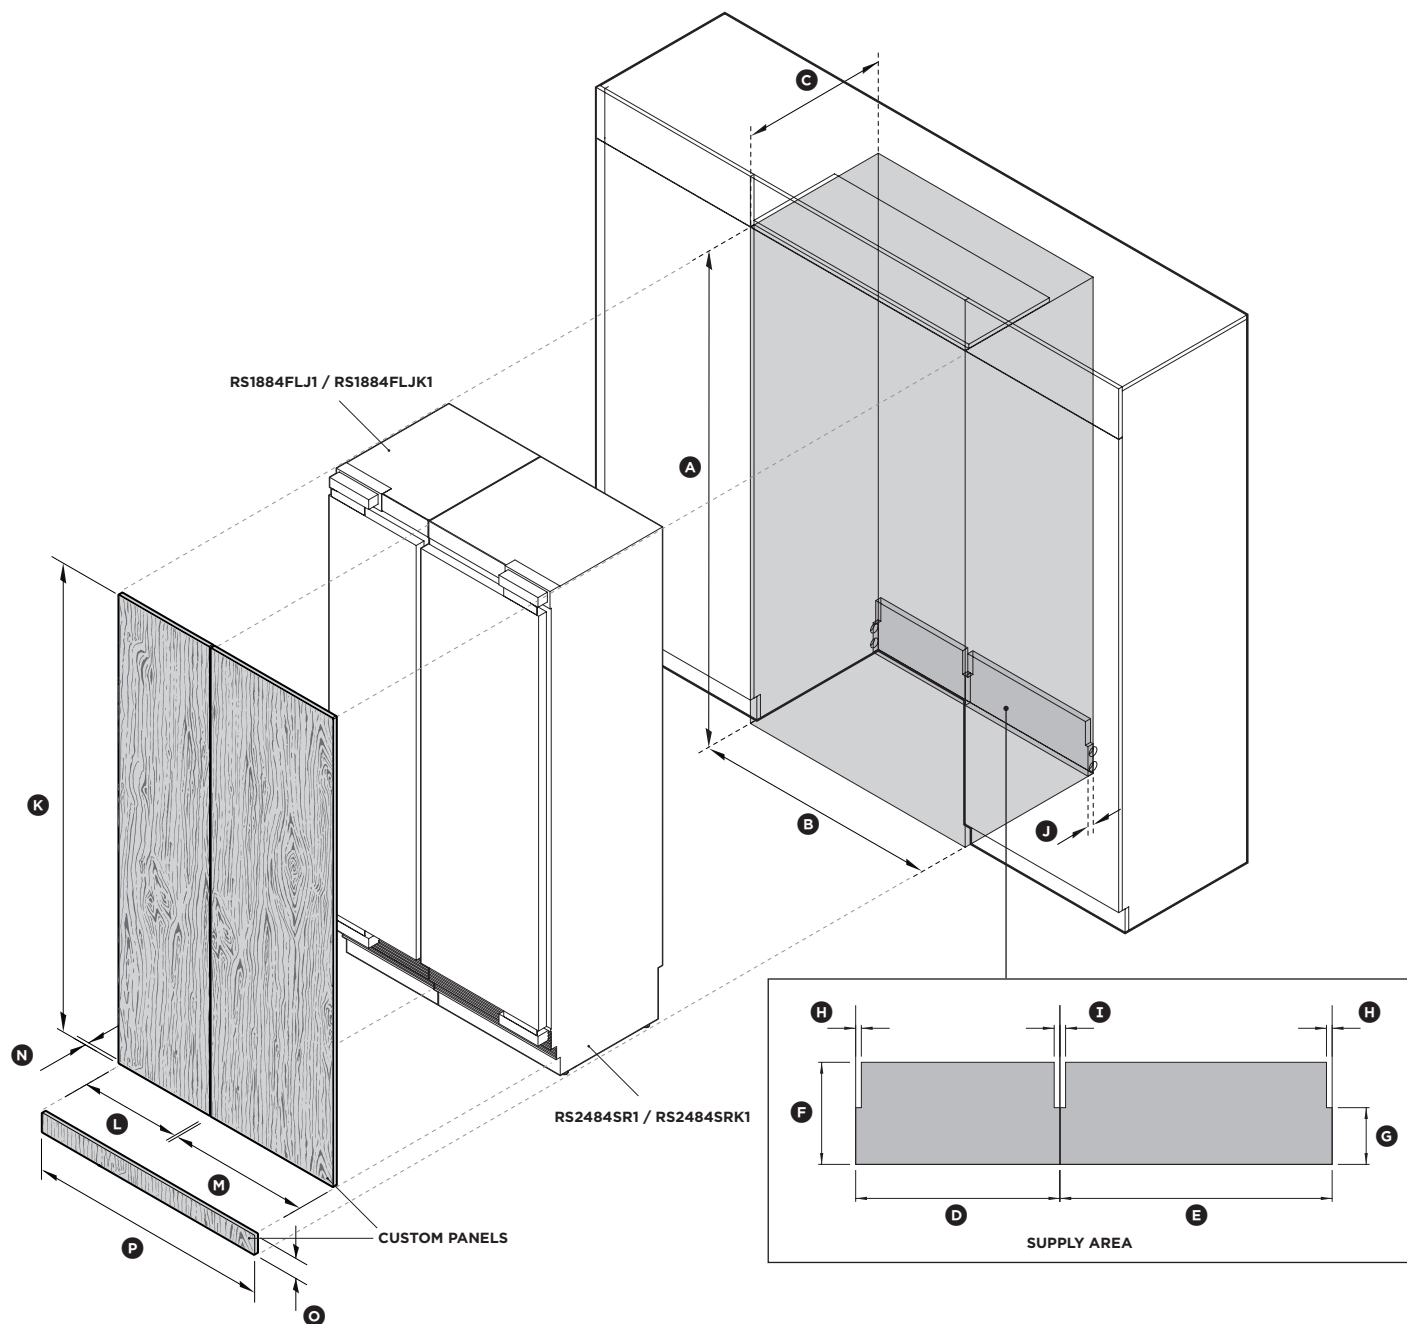

ISO VIEW OF 42" CAVITY
(18" + 24")

Clearance Dimensions		in
Ⓐ	Overall height of cavity	84"
Ⓑ	Overall width of cavity	42"
Ⓒ	Minimum depth of cavity*	25"
Ⓓ	Width of supply area behind freezer	18"
Ⓔ	Width of supply area behind fridge	24"
Ⓕ	Height of supply area	9"
Ⓖ	Height at sides of supply area	5"
Ⓗ	Width from side of supply area	1/2"
Ⓘ	Combined width in from side of supply areas	1"
Ⓙ	Depth of supply area	1"
Minimum door cabinetry gap clearance		1/8"

Custom Panel Dimensions**		in
Ⓚ	Height of door panel	77 7/8" - 81 7/8"
Ⓛ	Width of freezer door panel	17 13/16"
Ⓜ	Width of fridge door panel	23 13/16"
Ⓝ	Depth of custom door panels	min 5/8" max 1"
Ⓞ	Height of custom toekick panel***	2" - 6"
Ⓟ	Width of custom toekick panel***	41 7/8"
Maximum weight of freezer door panel (including handle****)		44lbs
Maximum weight of fridge door panel (including handle****)		55lbs

* With cavity at minimum depth, electrical and water connections must be within the supply area shown if located behind the appliance, and must not protrude from the back wall.
Connections may be located in an adjacent cabinet to either side of the fridge.

** Custom panels to be manufactured & fitted by cabinetmaker.

*** Optional 3 15/16" tall stainless steel toekick panel available. Alternatively, a custom built toekick (2"-6"H x 47 7/8"W) may be fitted as shown. Adjust the height of the door panel accordingly.

**** Door handle kit is available as an optional accessory.

DATE: 10.10.2018

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

FISHER & PAYKEL

DATA SHEET


18" Freezer + 24" Fridge - Custom Panel Integrated Columns

Model no:

RS1884FLJ1/ RS1884FLJK1 + RS2484SR1/ RS2484SR1 shown.
(Various models available to swap units to opposite sides, hinge doors both left, both right or at the outsides as shown here).
(refer page 1 for imperial measurements)

IMPORTANT!

For ease of installation, ensure cavity has consistent dimensions top to bottom and left to right.

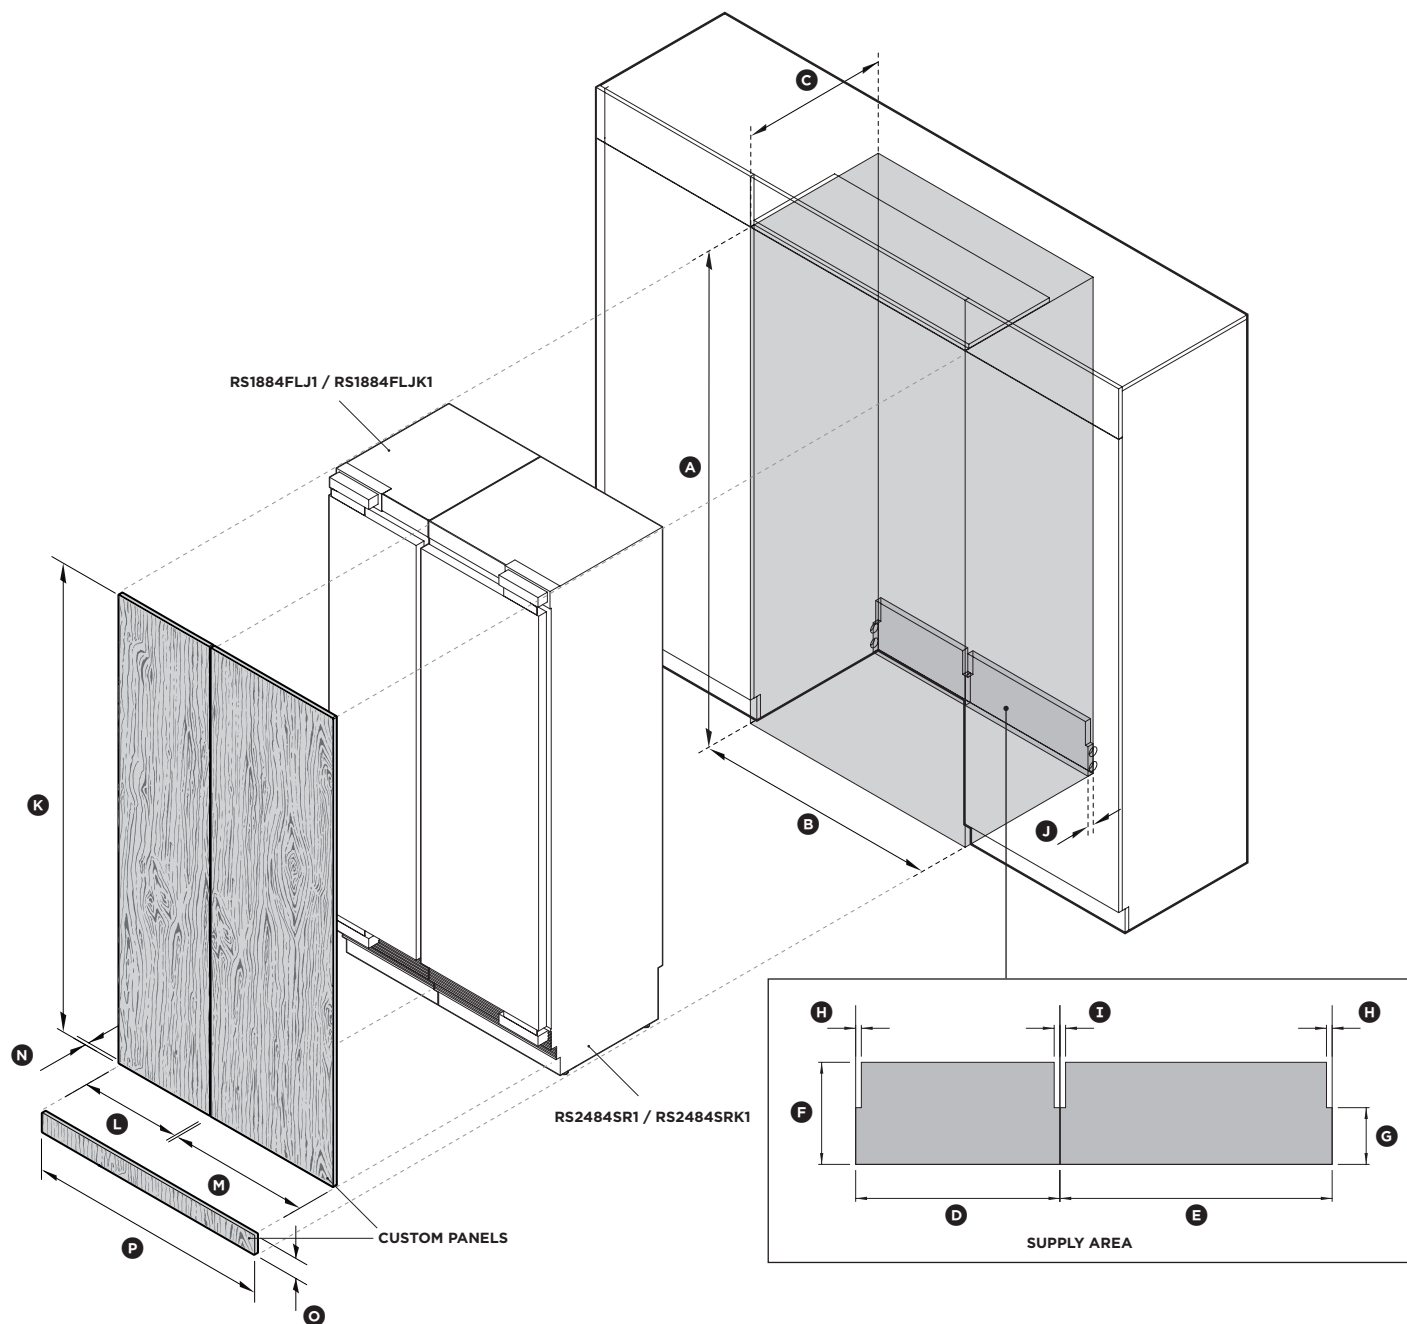

ISO VIEW OF 1067mm CAVITY
(457mm + 610mm)

Clearance Dimensions	mm
Ⓐ Overall height of cavity	2134
Ⓑ Overall width of cavity	1067
Ⓒ Minimum depth of cavity*	635
Ⓓ Width of supply area behind freezer	457
Ⓔ Width of supply area behind fridge	610
Ⓕ Height of supply area	229
Ⓖ Height at sides of supply area	127
Ⓗ Width from side of supply area	13
Ⓘ Combined width in from side of supply areas	25
Ⓙ Depth of supply area	25
Minimum door cabinetry gap clearance	3

Custom Panel Dimensions**	mm
Ⓚ Height of door panel	1978 - 2080
Ⓛ Width of freezer door panel	452.5
Ⓜ Width of fridge door panel	605
Ⓝ Depth of custom door panels	min 16 max 25
Ⓞ Height of custom toe kick panel***	50 - 152
Ⓟ Width of custom toe kick panel***	1063
Maximum weight of freezer door panel (including handle****)	20kg
Maximum weight of fridge door panel (including handle****)	25kg

* With cavity at minimum depth, electrical and water connections must be within the supply area shown if located behind the appliance, and must not protrude from the back wall.
Connections may be located in an adjacent cabinet to either side of the fridge.

** Custom panels to be manufactured & fitted by cabinetmaker.

*** Optional 100mm tall stainless steel toe kick panel available. Alternatively, a custom built toe kick (50mm-152mmH x 1063mmW) may be fitted as shown. Adjust the height of the door panel accordingly.

**** Door handle kit is available as an optional accessory.

DATE: 10.10.2018

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com