

FISHER & PAYKEL

DATA SHEET 24" Integrated Column Fridge / Freezer


Model nos:

RS2484SR1 / RS2484SRK1 / RS2484FRJ1 / RS2484FRJK1

NOTE: Left hand hinge model is a mirrored version of image shown.

RS2484SL1 / RS2484SLK1 / RS2484FLJ1 / RS2484FLJK1

(refer page 2 for metric measurements)

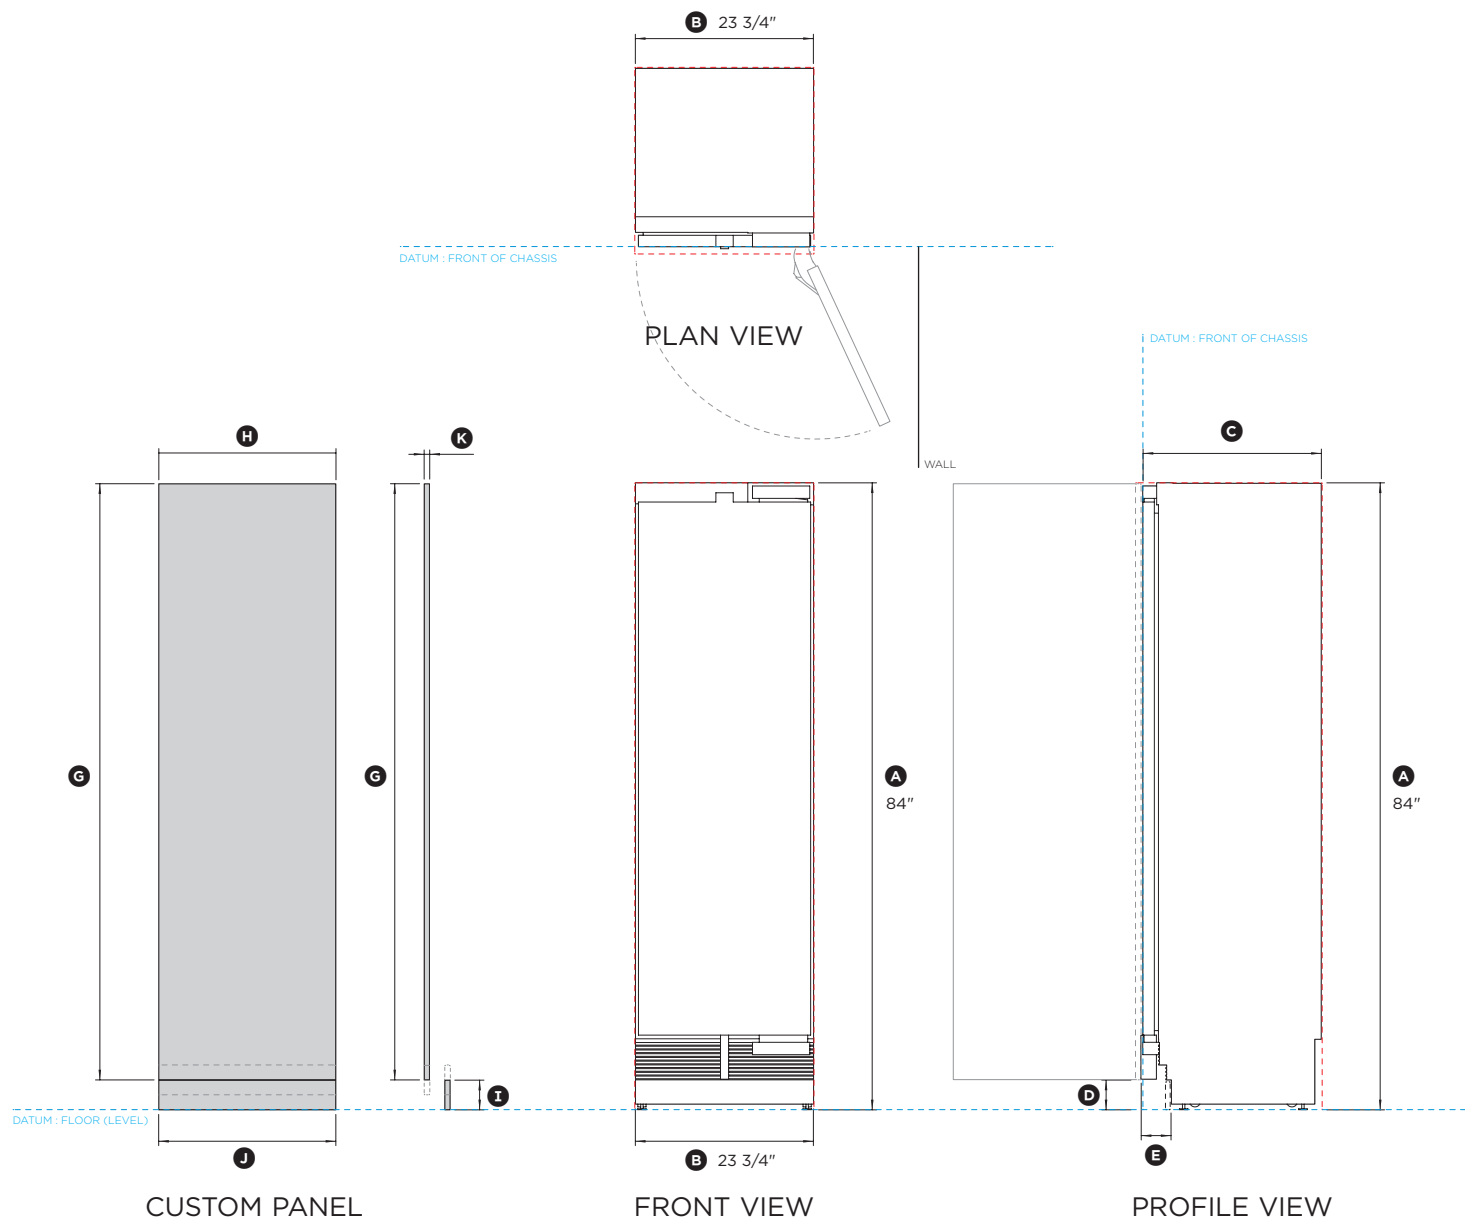

Product Dimensions	in
Ⓐ Overall height of product	84"
Ⓑ Overall width of product	23 3/4"
Ⓒ Overall depth of product (excl. front door panels)	24"
Ⓓ Height from bottom datum to bottom of door	2" - 6"
Ⓔ Depth of toekick (excl. door front and toekick panels)	2 11/16" - 4"

Custom Panel Dimensions*	in
Ⓔ Height of door panel	77 7/8" - 81 7/8"
Ⓜ Width of door panel - single install Width of door panel - dual install	23 3/4" 23 13/16"
Ⓐ Height of custom toekick panel**	2" - 6"
Ⓜ Width of custom toekick panel	23 7/8"
Ⓜ Depth of custom panels	min 5/8" - max 1"
Maximum weight of door panel (including handle***)	55lbs

* Custom panels to be manufactured & fitted by cabinetmaker

** 3 15/16" tall stainless steel toekick panel available. Adjust the height of the door panel accordingly.

*** Door handle kit is available as an optional accessory.

Clearance Dimensions	in
Minimum cabinetry gap clearance from edge of door panel	1/8"
Overall height of cavity	84"
Overall width of cavity	24"
Minimum depth of cavity	25"
Minimum door clearance to adjacent wall (115° - full internal access)	14"
Minimum door clearance at 90° open, measured from front of door	26"

INDICATES CAVITY CLEARANCES -----
INDICATES PRODUCT DATUM - - - - -

DATE: 10.10.2018

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

FISHER & PAYKEL

DATA SHEET 24" Integrated Column Fridge / Freezer


Model nos:

RS2484SR1 / RS2484SRK1 / RS2484FRJ1 / RS2484FRJK1

NOTE: Left hand hinge model is a mirrored version of image shown.

RS2484SL1 / RS2484SLK1 / RS2484FLJ1 / RS2484FLJK1

(refer page 1 for imperial measurements)

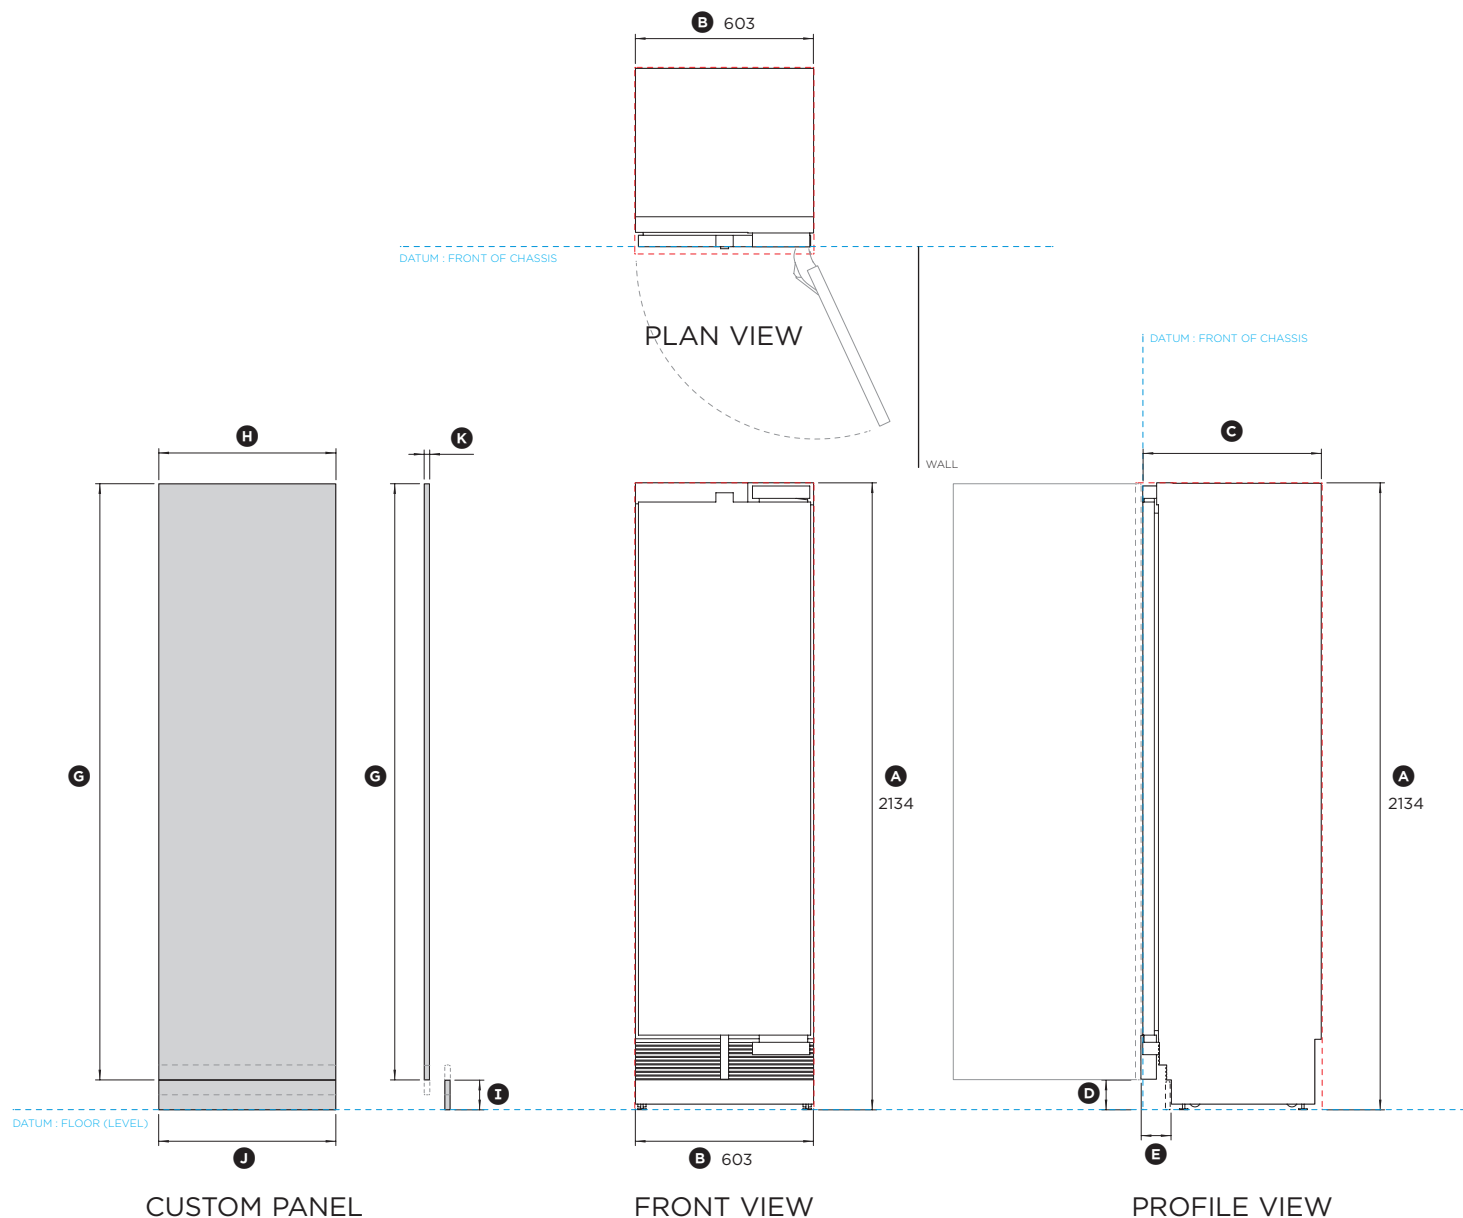

Product Dimensions	mm
Ⓐ Overall height of product	2134
Ⓑ Overall width of product	603
Ⓒ Overall depth of product (excl. front door panels)	610
Ⓓ Height from bottom datum to bottom of door	50 - 152
Ⓔ Depth of toekick (excl. door front and toekick panels)	68 - 101

Custom Panel Dimensions*	mm
Ⓔ Height of door panel	1978 - 2080
Ⓐ Width of door panel - single install	603
Width of door panel - dual install	605
Ⓓ Height of custom toekick panel**	50 - 152
Ⓓ Width of custom toekick panel	607
Ⓐ Depth of custom panels	min 16 max 25
Maximum weight of door panel (including handle***)	25kg

* Custom panels to be manufactured & fitted by cabinetmaker

** 100mm tall stainless steel toekick panel available. Adjust the height of the door panel accordingly.

*** Door handle kit is available as an optional accessory.

Clearance Dimensions	mm
Minimum cabinetry gap clearance from edge of door panel	3
Overall height of cavity	2134
Overall width of cavity	610
Minimum depth of cavity	635
Minimum door clearance to adjacent wall (115° - full internal access)	356
Minimum door clearance at 90° open, measured from front of door	660

INDICATES CAVITY CLEARANCES -----
INDICATES PRODUCT DATUM - - - - -

DATE: 10.10.2018

IMPORTANT NOTE: Throughout this guide, dimensions may vary by $\pm 2\text{mm}$ (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com