

FISHER & PAYKEL

DATA SHEET

30" Professional Integrated Column Fridge / Freezer


Model nos:

RS3084SR1 / RS3084SRK1 / RS3084FRJ1 / RS3084FRJK1
with Stainless Steel Door panel RD3084R4D, Handle AHC-RD84
and Stainless Steel Toekick Panel AKRS30041

NOTE: Left hand hinge model is a mirrored version of image shown.

RS3084SL1 / RS3084SLK1 / RS3084FLJ1 / RS3084FLJK1
with Stainless Steel Door panel RD3084L4D, Handle AHC-RD84
and Stainless Steel Toekick Panel AKRS30041

(refer page 2 for metric measurements)

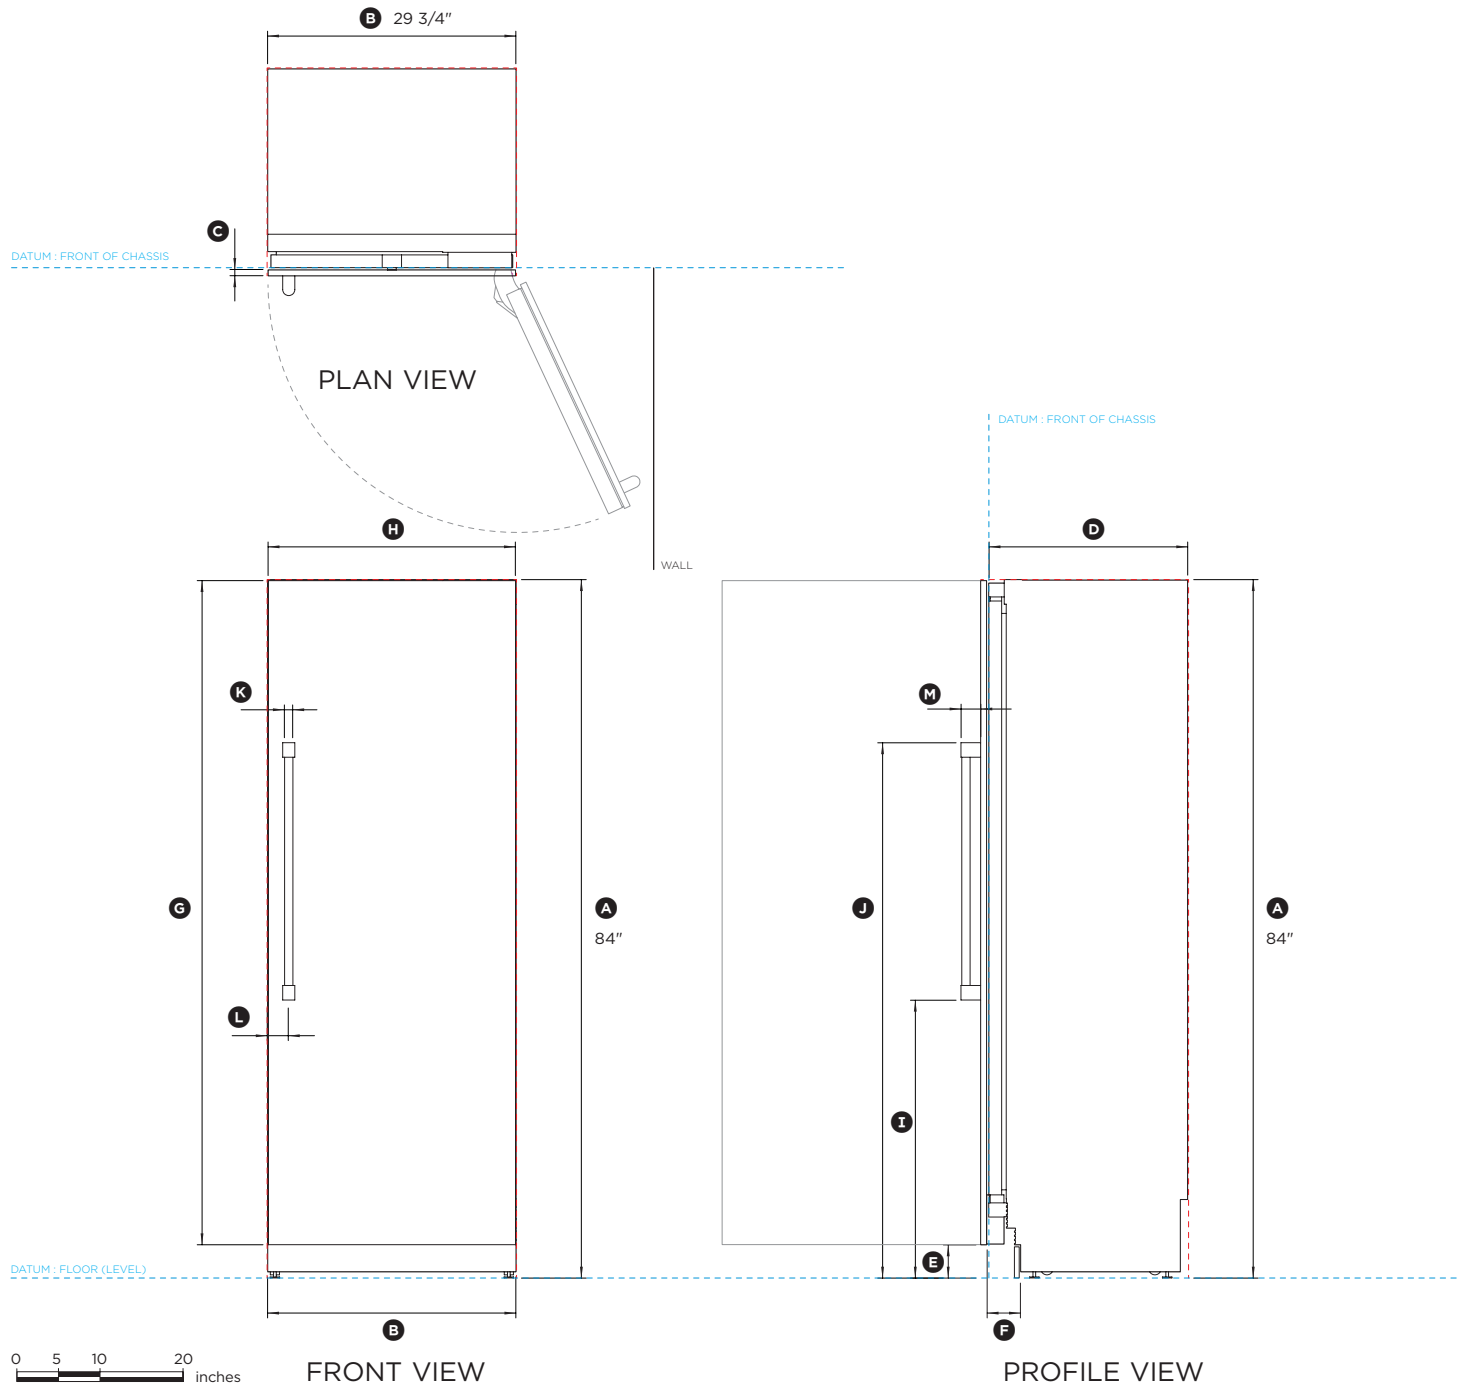

Product Dimensions	in
Ⓐ Overall height of product	84"
Ⓑ Overall width of product	29 3/4"
Ⓒ Depth of product front panels (excl. handles)	3/4"
Ⓓ Overall depth of product (excl. front door panels)	24"
Ⓔ Height from bottom datum to bottom of door	4"
Ⓕ Depth of toekick (excl. door front and toekick panels)	2 11/16"- 4"
Ⓖ Height of door panel	79 7/8"
Ⓗ Width of door panel	29 3/4"
Ⓘ Height from bottom datum to bottom of handle	33 7/16"
⓪ Height from bottom datum to top of handle	64 3/8"
Ⓚ Thickness of handle (rail)	1"
Ⓛ Distance from side of fridge to the center of handle	2 1/2"
Ⓜ Depth of handle standoff (measured from front of door)	2 3/8"

Clearance Dimensions	in
Minimum cabinetry gap clearance from edge of door panel	1/8"
Overall height of cavity	84"
Overall width of cavity	30"
Minimum depth of cavity	25"
Minimum door clearance to adjacent wall (115° - full internal access)	16 1/2"
Minimum door clearance at 90° open, measured from front of door	32"

INDICATES CAVITY CLEARANCES -----

INDICATES PRODUCT DATUM - - - - -

DATE: 10.10.2018

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

FISHER & PAYKEL

DATA SHEET

30" Professional Integrated Column Fridge / Freezer


Model nos:

RS3084SR1 / RS3084SRK1 / RS3084FRJ1 / RS3084FRJK1
with Stainless Steel Door panel RD3084R4D, Handle AHC-RD84
and Stainless Steel Toekick Panel AKRS30041

NOTE: Left hand hinge model is a mirrored version of image shown.

RS3084SL1 / RS3084SLK1 / RS3084FLJ1 / RS3084FLJK1
with Stainless Steel Door panel RD3084L4D, Handle AHC-RD84
and Stainless Steel Toekick Panel AKRS30041

(refer page 1 for imperial measurements)

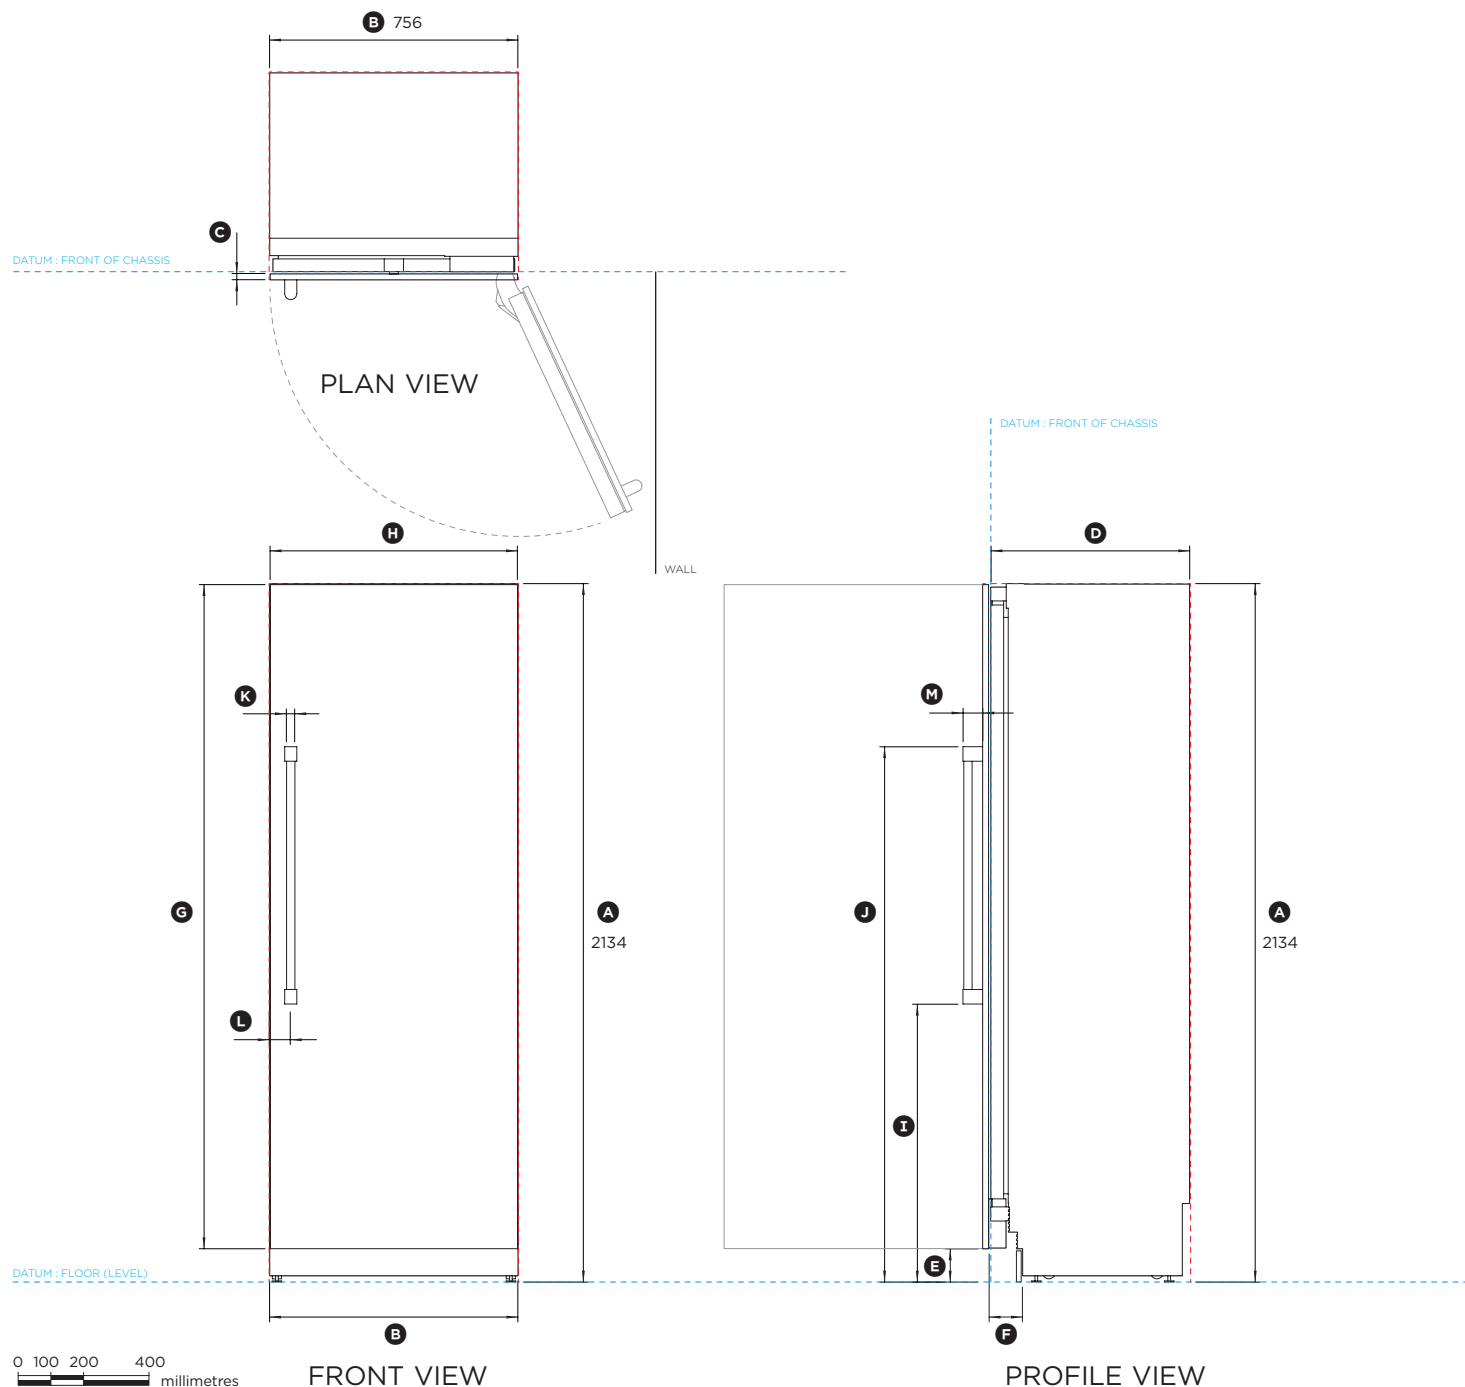

Product Dimensions	mm
Ⓐ Overall height of product	2134
Ⓑ Overall width of product	756
Ⓒ Depth of product front panels (excl. handles)	19
Ⓓ Overall depth of product (excl. front door panels)	610
Ⓔ Height from bottom datum to bottom of door	102
Ⓕ Depth of toekick (excl. door front and toekick panels)	68 - 101
Ⓖ Height of door panel	2029
Ⓗ Width of door panel	756
Ⓘ Height from bottom datum to bottom of handle	849
⓪ Height from bottom datum to top of handle	1635
Ⓚ Thickness of handle (rail)	25
Ⓛ Distance from side of fridge to the centre of handle	64
Ⓜ Depth of handle standoff (measured from front of door)	60

Clearance Dimensions	mm
Minimum cabinetry gap clearance from edge of door panel	3
Overall height of cavity	2134
Overall width of cavity	762
Minimum depth of cavity	635
Minimum door clearance to adjacent wall (115° - full internal access)	419
Minimum door clearance at 90° open, measured from front of door	813

INDICATES CAVITY CLEARANCES -----
INDICATES PRODUCT DATUM - - - - -

DATE: 10.10.2018

IMPORTANT NOTE: Throughout this guide, dimensions may vary by $\pm 2\text{mm}$ (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com