

FISHER & PAYKEL

DATA SHEET

24" Freezer + 30" Fridge - Custom Panel Integrated Columns

Model no:

RS2484FLJ1 / RS2484FLJ1 + RS3084SR1 / RS3084SK1 shown.
(Various models available to swap units to opposite sides, hinge doors both left, both right or at the outsides as shown here).
(refer page 2 for metric measurements)

IMPORTANT!

For ease of installation, ensure cavity has consistent dimensions top to bottom and left to right.

Clearance Dimensions		in
Ⓐ	Overall height of cavity	84"
Ⓑ	Overall width of cavity	54"
Ⓒ	Minimum depth of cavity*	25"
Ⓓ	Width of supply area behind freezer	24"
Ⓔ	Width of supply area behind fridge	30"
Ⓕ	Height of supply area	9"
Ⓖ	Height at sides of supply area	5"
Ⓗ	Width from side of supply area	1/2"
Ⓘ	Combined width in from side of supply areas	1"
Ⓙ	Depth of supply area	1"
Minimum door cabinetry gap clearance		1/8"

Custom Panel Dimensions**		in
Ⓚ	Height of door panel	77 7/8" - 81 7/8"
Ⓛ	Width of freezer door panel	23 13/16"
Ⓜ	Width of fridge door panel	29 13/16"
Ⓝ	Depth of custom door panels	min 5/8" max 1"
Ⓞ	Height of custom toekick panel***	2" - 6"
Ⓟ	Width of custom toekick panel***	53 7/8"
Maximum weight of freezer door panel (including handle****)		55lbs
Maximum weight of fridge door panel (including handle****)		66lbs

* With cavity at minimum depth, electrical and water connections must be within the supply area shown if located behind the appliance, and must not protrude from the back wall.
Connections may be located in an adjacent cabinet to either side of the fridge.


** Custom panels to be manufactured & fitted by cabinetmaker.

*** Optional 3 15/16" tall stainless steel toekick panel available. Alternatively, a custom built toekick (2"-6"H x 53 7/8"W) may be fitted as shown. Adjust the height of the door panel accordingly.

**** Door handle kit is available as an optional accessory.

DATE: 10.10.2018

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

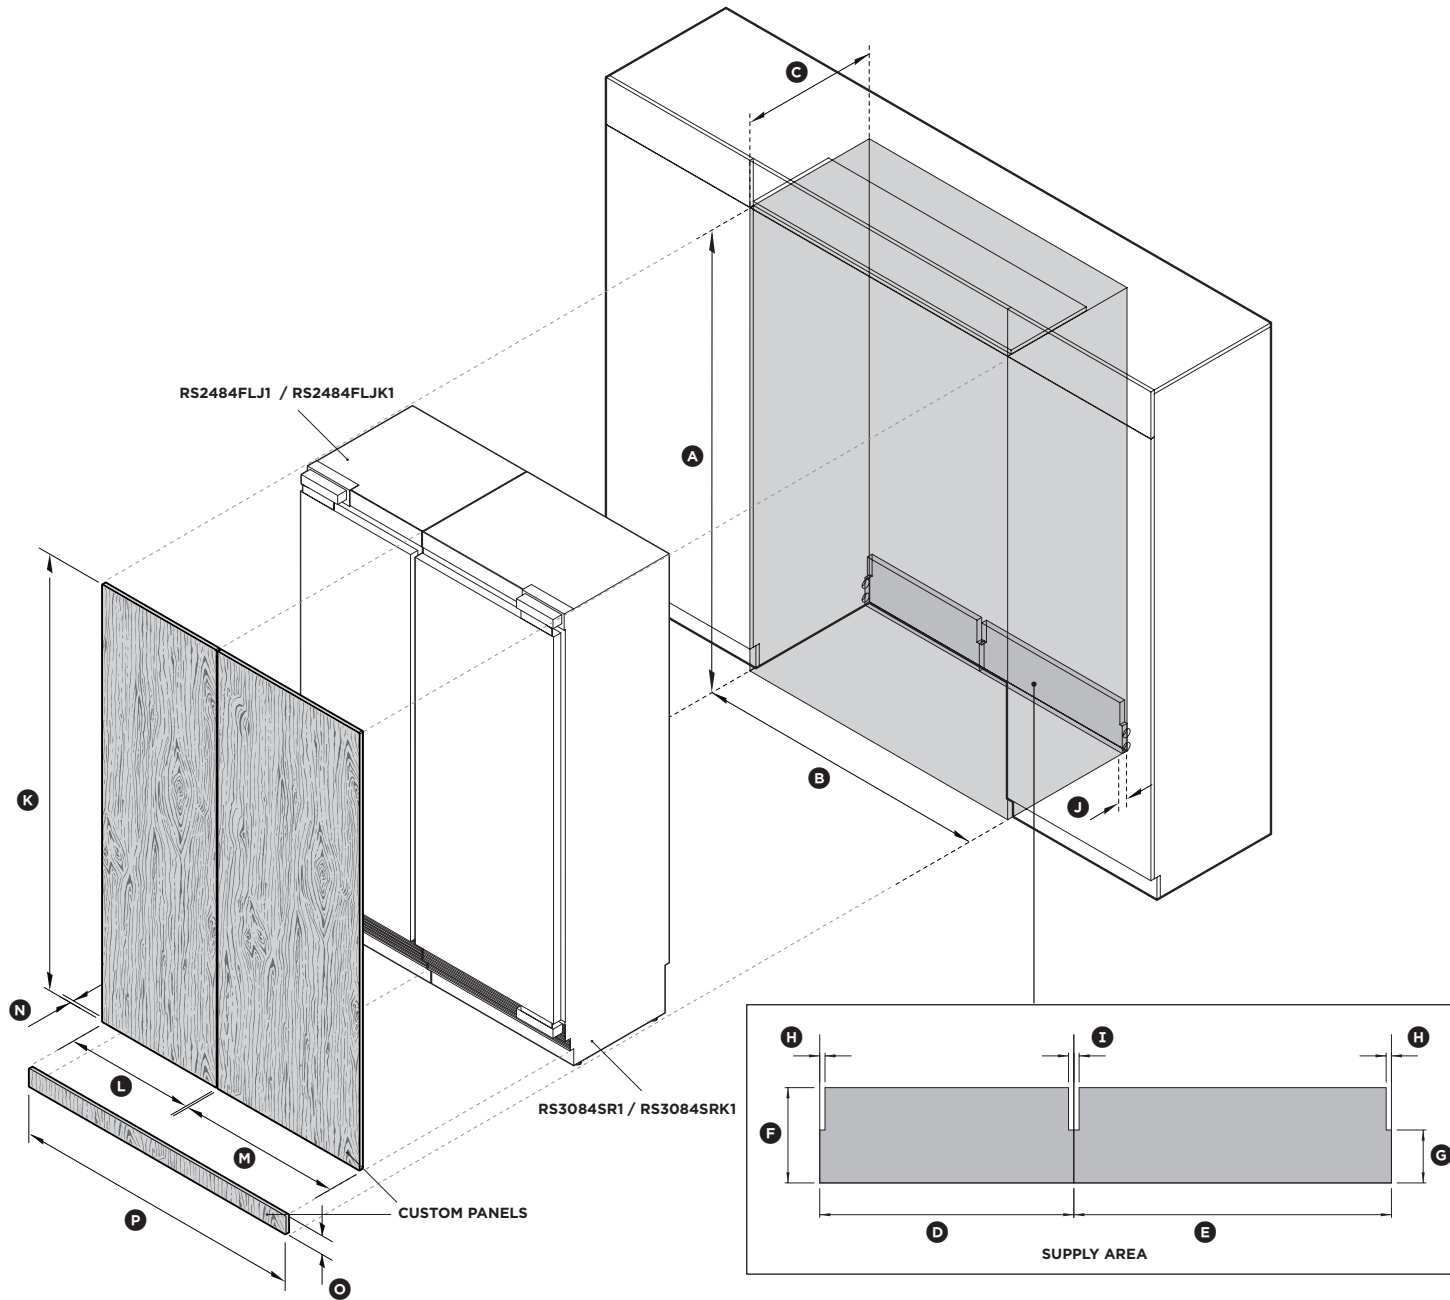

ISO VIEW OF 54" CAVITY
(24" + 30")

FISHER & PAYKEL

DATA SHEET

24" Freezer + 30" Fridge - Custom Panel Integrated Columns

Model no:

RS2484FLJ1 / RS2484FLJ1 + RS3084SR1 / RS3084SK1 shown.
(Various models available to swap units to opposite sides, hinge doors both left, both right or at the outsides as shown here).
(refer page 1 for imperial measurements)

IMPORTANT!

For ease of installation, ensure cavity has consistent dimensions top to bottom and left to right.

Clearance Dimensions	mm
Ⓐ Overall height of cavity	2134
Ⓑ Overall width of cavity	1372
Ⓒ Minimum depth of cavity*	635
Ⓓ Width of supply area behind freezer	610
Ⓔ Width of supply area behind fridge	762
Ⓕ Height of supply area	229
Ⓖ Height at sides of supply area	127
Ⓗ Width from side of supply area	13
Ⓘ Combined width in from side of supply areas	25
Ⓙ Depth of supply area	25
Minimum door cabinetry gap clearance	3

Custom Panel Dimensions**	mm
Ⓚ Height of door panel	1978 - 2080
Ⓛ Width of freezer door panel	605
Ⓜ Width of fridge door panel	757.5
Ⓝ Depth of custom door panels	min 16 max 25
Ⓞ Height of custom toekick panel***	50 - 152
Ⓟ Width of custom toekick panel***	1368
Maximum weight of freezer door panel (including handle****)	25kg
Maximum weight of fridge door panel (including handle****)	30kg

* With cavity at minimum depth, electrical and water connections must be within the supply area shown if located behind the appliance, and must not protrude from the back wall.
Connections may be located in an adjacent cabinet to either side of the fridge.


** Custom panels to be manufactured & fitted by cabinetmaker.

*** Optional 100mm tall stainless steel toekick panel available. Alternatively, a custom built toekick (50mm-152mmH x 1368mmW) may be fitted as shown. Adjust the height of the door panel accordingly.

**** Door handle kit is available as an optional accessory.

DATE: 10.10.2018

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

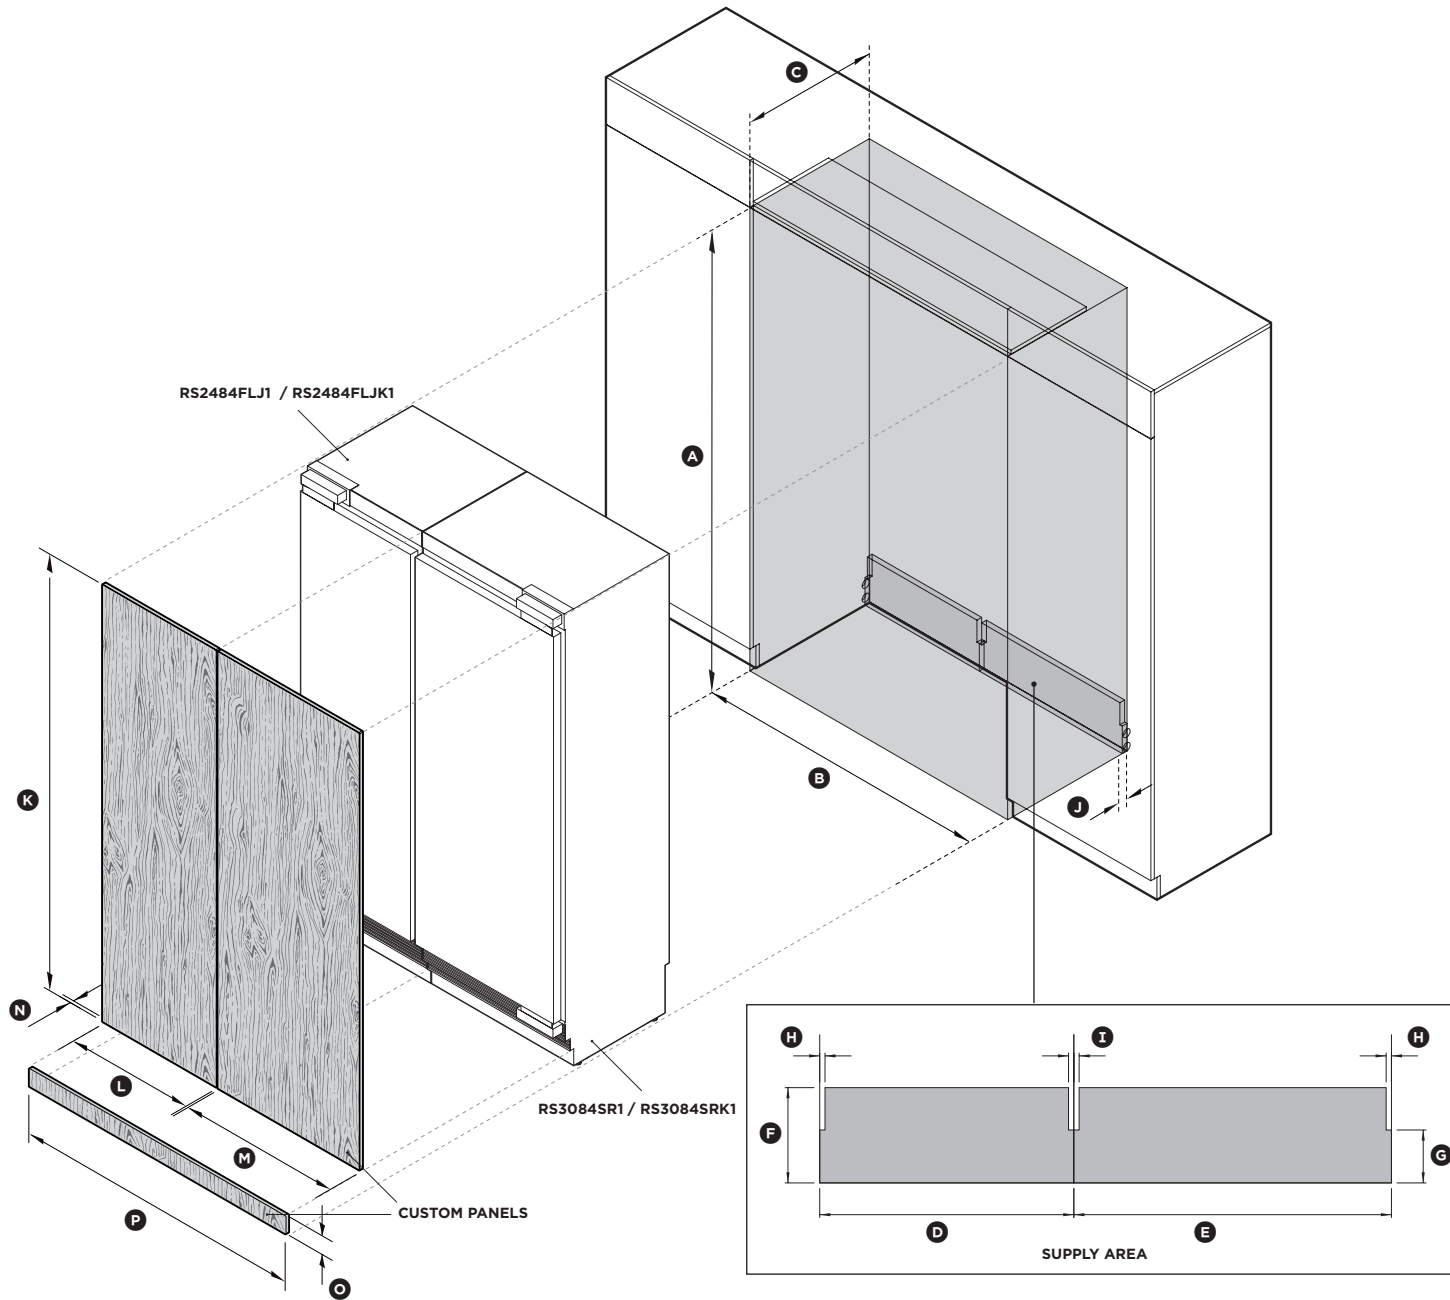

ISO VIEW OF 1372mm CAVITY
(610mm + 762mm)