

# FISHER & PAYKEL

## PRELIMINARY SPECIFICATION GUIDE

## INTEGRATED RANGEHOOD SERIES 7



### OVERVIEW

High-quality, integrated insert rangehoods seamlessly blend with cabinetry and can be installed in a variety of kitchen layouts. With three fan speeds, plus a boost function, powerful extraction quickly removes odours and steam. Enjoy seamless operation with Wi-Fi enabled remote control and Bluetooth Hood to Hob connectivity.

### MODELS

**Integrated Rangehood, 60cm**  
HP60IDCHX4

**Integrated Rangehood, 90cm**  
HP90IDCHX4

### SERIES & STYLE

**Series 7**  
Integrated

### FEATURES

- ① Seamlessly integrated
- ② Wi-Fi enabled for remote control and notifications through the SmartHQ™ app and Bluetooth connectivity
- ③ Powerful 750m<sup>3</sup>/hr maximum airflow
- ④ Energy-efficient LED lighting creates a warm (or cold), even glow
- ⑤ Sleek black glass finish with real stainless steel frame
- ⑥ Three fan speeds plus a boost function
- ⑦ Automatic alert works as a reminder to clean filters for optimal performance
- ⑧ Removable, easy-to-clean filters that effectively trap grease
- ⑩ Delayed turn off

\*Selected markets and models

### OPTIONAL ACCESSORIES

- ① Roof Ducting PD-RHK150T
- ② Eave Ducting PD-RHK150E
- ③ Side Wall Ducting PD-RHK150W
- ④ Recirculation Carbon Filter 792481
- ⑤ Aluminium Filter 792942 for HP60IDCHX4
- ⑥ Aluminium Filter 792943 for HP90IDCHX4

# FISHER & PAYKEL


## PRELIMINARY SPECIFICATION GUIDE

## 60CM INTEGRATED RANGEHOOD SERIES 7

### SPECIFICATIONS


Model No.	HP60IDCHX4
Dimensions	<b>H</b> 361mm x <b>W</b> 530mm x <b>D</b> 280mm
Weight	8.2kg
Minimum distance above cooktops	600 - 750mm
<b>Electrical</b>	
Supply	220 - 240VAC, 50Hz
Receptacle	3-pin plug
<b>Light source</b>	
Type	Bi colour LED strip
Temperature	4000K

### PRODUCT DIMENSIONS

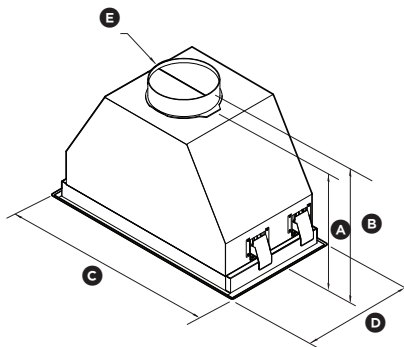

ISO VIEW

### CAVITY DIMENSIONS: STANDARD INSTALLATION

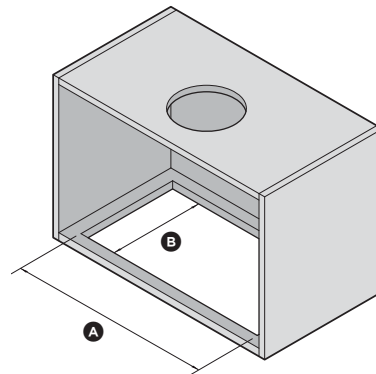

ISO VIEW

	mm
(A) Overall height of rangehood without ducting adapter	316
(B) Overall height of rangehood with ducting adapter	361
(C) Overall width of rangehood	530
(D) Overall depth of rangehood (excl. cabinetry front panel)	280
(E) Diameter of ducting adaptor	150

	mm
(A) Width of cutout	500
(B) Depth of cutout	260

Note: We recommend the cabinet has a door or service panel that can be easily opened to access the power connection.

# FISHER & PAYKEL


## PRELIMINARY SPECIFICATION GUIDE

## 90CM INTEGRATED RANGEHOOD SERIES 7

### SPECIFICATIONS

Model No.	HP90IDCHX4
Dimensions	<b>H</b> 361mm x <b>W</b> 830mm x <b>D</b> 280mm
Weight	11.5kg
Minimum distance above cooktops	Electric: 600 – 750mm
Electrical	
Supply	220 – 240VAC, 50Hz
Receptacle	3-pin plug
Light source	
Type	Bi colour LED strip
Temperature	4000K


### PRODUCT DIMENSIONS

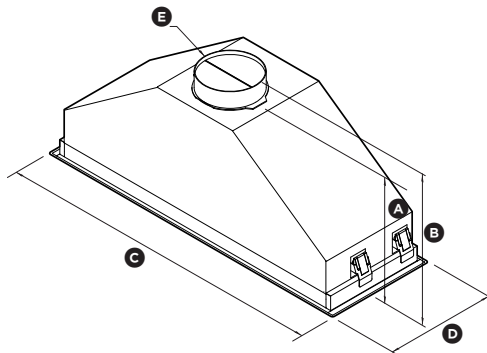

ISO VIEW

		mm
(A)	Overall height of rangehood without ducting adapter	316
(B)	Overall height of rangehood with ducting adapter	361
(C)	Overall width of rangehood	830
(D)	Overall depth of rangehood (excl. cabinetry front panel)	280
(E)	Diameter of ducting adaptor	150

### CAVITY DIMENSIONS: STANDARD INSTALLATION

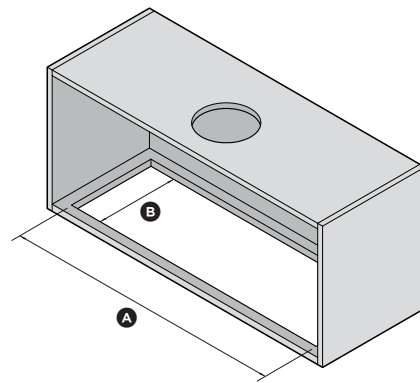

ISO VIEW

		mm
(A)	Width of cutout	800
(B)	Depth of cutout	260

Note: We recommend the cabinet has a door or service panel that can be easily opened to access the power connection.