

30" Series 9 Professional Warming Drawer

Professional




With a bold and distinctive design this Warming Drawer keeps food and plates warm, with additional functions like Rapid Proof and Dehydrate.

- Soft close drawer with room for up to 16 standard-sized place settings
- Simple and intuitive touch controls for effortless operation
- Automatic switch-off and delayed start to keep dishes warm until it is time to serve
- Designed to match our Professional style appliances, for the ultimate kitchen solution

DIMENSIONS

Height	10 11/16 "
Width	29 7/8 "
Depth	22 1/2 "

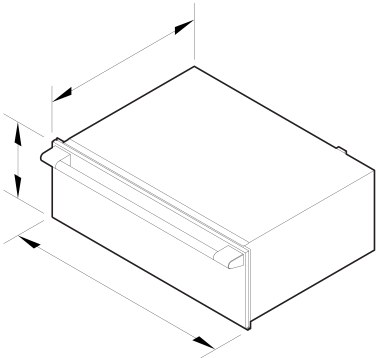

FEATURES & BENEFITS

MULTI-FUNCTION FLEXIBILITY

With space for up to 16 place settings or 20 cappuccino cups, our warming drawer is the ideal kitchen companion. Choose from six tailored functions, including Rapid Proof for dough, Dehydrate for drying foods, and Slow Cook for tender, flavorful meals.

PRECISE CONTROL

With gentle, even heating, our warming drawer is perfect for keeping dishes warm or gently cooking at low temperatures. Maintain the ideal serving temperature for every course, from delicate entrées to desserts, or use it to slowly develop rich, tender textures in your favorite recipes.

SAFE AND SOUND

With automatic switch-off and delayed start functionality, our warming drawers help keep dishes warm until you are ready to serve.

EASY TO CLEAN

Cleaning and care of the warming drawer is simple. After each use, just wipe out the smooth glass base with a damp cloth.

DESIGNED TO MATCH

Designed to complement our Professional style family of appliances, this Warming Drawer features a stainless steel finish with refined detailing. Able to be seamlessly built in almost anywhere, our companion products are crafted to align beautifully and install at the height that best suits your kitchen and lifestyle.

SPECIFICATIONS

Accessories (included)

Wire shelf	1
------------	---

Accessories (sold separately)

Handle kit Professional round flush	AHP30BWBVB30 DC AHP30BWBVB30 BA
-------------------------------------	--

Capacity

Accessory rack maximum allowable weight	42lb
Cappuccino cups	24
Espresso cups	54
Maximum allowable weight	55 lbs
Place settings	16

Cleaning

Easy clean smooth-glass base	•	Height	10 11/16 "	↓ Rhino
		Width	29 7/8 "	↓ Right To Repair Declaration (English, Canadian French)
				↓ Safety & Warnings (English, Canadian French, Spanish)
				↓ SketchUp
Controls				
Audio feedback	•	Safety		
Electronic capacitive touch controls	•	Automatic turn off after 12 hours	•	Where applicable:
Pre-set heating functions	•	Full extension slides	•	
Standby mode	•			All appliances use energy, and energy usage typically generates carbon emissions. Fisher & Paykel Appliances' In-use Energy Carbon Emissions Estimate indicates carbon emissions from a product's in-use energy. This is calculated either annually or per cycle, using the product's market-specific energy label energy consumption data multiplied by the carbon emissions factor for energy in your country or region.
				Our In-use Energy Carbon Emissions Estimate is designed to assist customers in making informed purchasing decisions when comparing different Fisher & Paykel products. For example, a heat pump dryer typically has a lower In-use Energy Carbon Emissions Estimate than a vented dryer.
Functions		SKU	85476	
Cups	•			
Dehydrate	•	The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. © Fisher & Paykel Appliances Ltd 2020		
Number of functions	6			
Plates	•			
Rapid proof	•			
Slow cook	•			
Warm	•			
		Other product downloads available at fisherpaykel.com		24/7 A PEACE OF MIND SALE 24 Hours 7 Days a Week Customer Support T 1.888.936.7872 Wwww.fisherpaykel.com
Performance		↓ DWG		
Heated glass base and fan	•	↓ DXF		
Low temperature cooking	•	↓ Care & Maintenance (English)		
Temperature levels	6	↓ Care & Maintenance (Canadian French)		
		↓ Care & Maintenance (Spanish)		
		↓ First Use (English)		
		↓ First Use (Canadian French)		
		↓ First Use (Spanish)		
Power requirements		↓ Installation Guide (English)		
Amperage	10 A	↓ Installation Guide (Canadian French)		
Supply frequency	60 Hz	↓ Installation Guide (Spanish)		
Supply voltage	120 V	↓ Installation Considerations (English, Canadian French, Spanish)		
		↓ Planning Guide - 30" Professional (English)		
		↓ Planning Guide - 30" Professional (Canadian French)		
		↓ Planning Guide - 30" Professional (Spanish)		
Product dimensions		↓ Revit		
Depth	22 1/2 "			