
## **DATA SHEET**

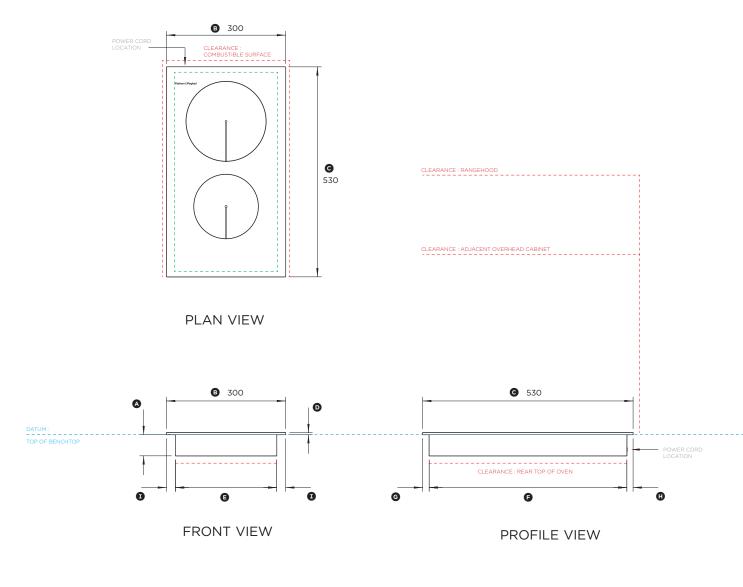

400

millimetres

## **300MM INDUCTION COOKTOP**

## Model no: CI302CTB1

Product Dimensions	mm
Height of chassis (below top of benchtop)	54
® Overall width of cooktop	300
© Overall depth of cooktop	530
Height from benchtop datum to top of cooktop surface	5
© Width of chassis	255
© Depth of chassis	497
Distance from front of cooktop to front of chassis	16
Distance from back of cooktop to back of chassis	16
① Distance from side of cooktop to side of chassis	22.5

Minimum Clearances	mn
Minimum clearance from rear edge of cutout to nearest combustible surface	30
Minimum clearance from side edges of cutout to nearest combustible surface	30
Minimum clearance below top of benchtop to Fisher & Paykel oven* or cabinetry thermal protection barrier	72
Minimum clearance from cooktop surface to rangehood	650
Minimum clearance from benchtop to adjacent overhead cabinet	450

\* Note the oven installed below the cooktop MUST have a cooling fan.

Cutout Dimensions	mm
Overall width of cutout**	260
Overall depth of cutout**	505

<sup>\*\*</sup> Note cutout position is centred to the cooktop.

It is important that the induction cooktop receives adequate air supply. For ventilation requirements please refer to the installation manual.

DATE: 12.01.2016

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (3/32"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

