COMBINATION MICROWAVE OVEN, MINIMAL

PLANNING GUIDE

SERIES 7

OM60NMLB1, OM60NMLG1

This comprehensive Planning Guide provides you with the framework and tools to achieve your desired design outcome with Fisher & Paykel appliances. In this guide, you will find a range of conceptual, detailed, and dimensional product information to bring your ideas to life and create spaces that truly reflect your vision.

CONTENTS

CONCEPT DESIGN	PAGE	DEVELOPED AND DETAILED DESIGN	PAGE	DEVELOPED AND DETAILED DESIGN	PAGE
Specification Guide	3	Data Sheet	6		
OM60NMLB1, OM60NMLG1		OM60NMLB1, OM60NMLG1			

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com

SPECIFICATION GUIDE



xxxxxxxxxx



xxxxxxxx

OVERVIEW

This 60cm combination microwave combines the speed of microwave cooking with the versatility of convection technology in a compact companion model. It features a spacious 49L interior, reflective black glass finish, and 19 cooking functions. The intuitive 2.4" display enhances control, complemented by Wi-Fi connectivity and SmartHQ $^{\text{TM}}$ app integration for convenience in any modern kitchen.

PRODUCTS

Combination Microwave Oven, 60cm, 19 Function 2.4" TFT Display, Dial OM60NMLB1 - Grey

SERIES & STYLE

OM60NMLG1 - Black

Series 7 Minimal

FEATURES

- Minimal style, with black glass finish or Minimal style, with subtle grey glass finish
- ② Compact 60cm width means this microwave oven can be placed almost anywhere
- 3 Intuitive, 2.4" display with illuminated dial
- 4 Generous 49L capacity, with four shelf positions
- S Choose from 19 cooking modes including Fan Forced and Grill
- 6 CoolTouch door is safe to touch from the outside
- ② Wi-Fi enabled and works with the SmartHQ™ app for remote control and notifications*
- (8) Purchase the Wired Temperature Sensor accessory to precisely monitor cooking in real-time

ACCESSORIES


- 1 Wire Shelves
- Step down wire shelf
- 3 Glass oven tray
- 4 Broil rack

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com

^{*}Selected markets and models


Model No. OM60NMLB1, OM60NMLG1 Product Dimensions Electrical Supply 220-240 V, 50 Hz Service 20 A

PRODUCT DIMENSIONS



	mm
Overall height	458
Overall width	596
© Depth of chassis	545
Depth from front frame (excludes dial and handle)	20
Depth of oven door when fully open (measured from front of control panel)	320


CAVITY DIMENSIONS




	mm
Minimum inside height	440
® Minimum inside width	560
© Minimum inside depth	550

The models shown in this Planning Guide may not be available in all markets and are subject to change at any time. Product specifications may vary from those shown. This Planning Guide should not be used as installation guidance for any product. Further information is required to safely and correctly install the products featured here. Specific installation guidance will be available on our website fisherpaykel.com

DATA SHEET

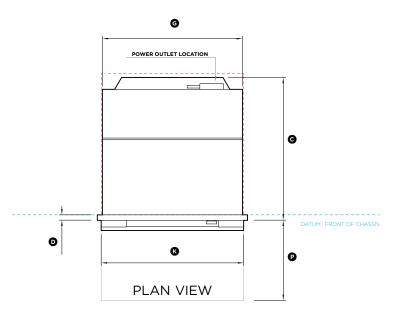

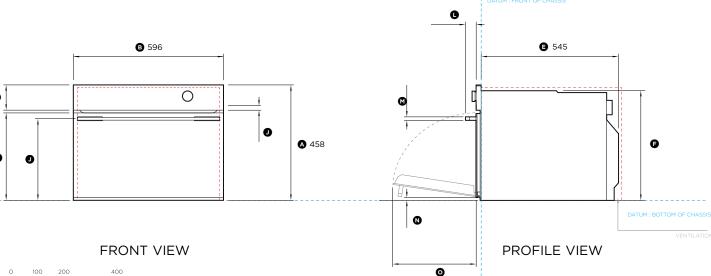

OM60NMLB1, OM60NMLG1

Product Dimensions	mm	
Overall height of oven	458	
® Overall width of oven	596	
© Overall depth of oven (excludes handle and front metal trim)	565	
Depth of oven frame, control panel and door (excludes handle and front trim)	20	
© Depth of chassis (includes terminal block)	545	
Height of chassis	435	
® Width of chassis	556	
Height from bottom datum to top of oven door	347	
Height of control panel	100	
Height from bottom datum to centerline of handle	324	
® Width of handle	565	
© Depth of handle (measured from front of door)	42	
M Thickness of handle	16	
Distance from bottom datum to bottom of door glass	12	
Depth of door (open) (measured from front of door)	320	
Minimum Clearances	mm	
Minimum inside height of cavity		
Minimum inside width of cavity	560	

Minimum inside height of cavity	440
Minimum inside width of cavity	560
Minimum inside depth of cavity	550
Overall height of cabinetry (cavity around front frame)	460
Overall width of cabinetry (cavity around front frame)	600
Rear ventilation air vent depth*	50
Rear ventilation air vent width*	560

*A rear ventilation air vent totalling 44in2 (280cm2) is required. The air vent must be located at the rear of the cabinet, it can be positioned at the base, sides, back or top of the cavity.

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ± 2 mm (1/16")

INDICATES PRODUCT DATUM -----INDICATES CABINETRY CLEARANCES -----

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the Installation Guide for detailed information on installing the product. For full installation instructions visit fisherpaykel.com