


24" Series 9 Contemporary Warming Drawer

Contemporary

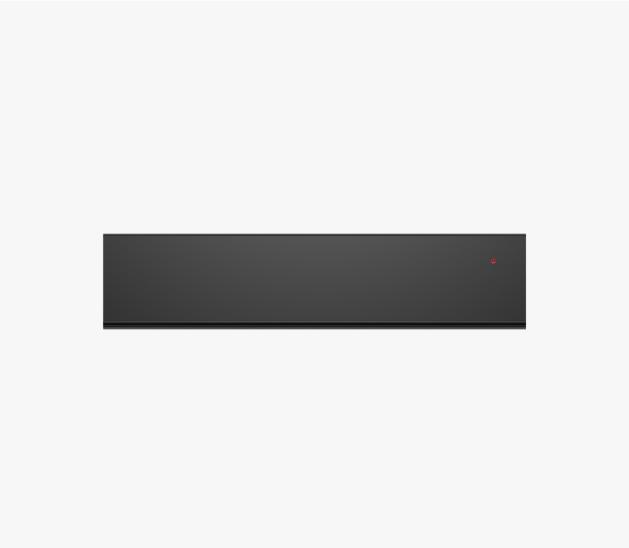


Serve meals hot and directly from a pre-heated plate thanks to our panel-ready, warming drawer.

- Integrates with surrounding cabinetry for a seamless look
- Space to keep six standard-sized place settings evenly warm
- Easy to clean smooth-glass base
- Six versatile tailored programmes for warming, proofing, dehydrating and slow cooking

DIMENSIONS

Height 5 1/2 "

Width 23 7/16 "
Depth 22 5/16 "

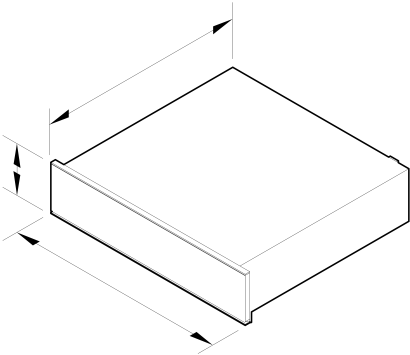

FEATURES & BENEFITS

Complementary Design
This Warming Drawer comes in a stylish black reflective glass finish, for seamless pairing with our Contemporary style ovens.

Multi-Function Flexibility
Choose from six tailored functions, including Rapid Proof for dough proofing and Dehydrate for drying foods like meat, fruit, and herbs. The Slow Cook function is ideal for finishing seared meats, casseroles, stews, and braises.

Precise Control
Our warming drawer delivers quick, even heating, ideal for keeping food warm and low-temperature cooking. You can also use it for resting roasted meat and proofing dough for bread or pizza bases.

Added Convenience

With intuitive touch controls and a handle-free, push-to-open design, our warming drawer gives you the freedom to keep plates or cups warm while you continue to cook.

Easy To Clean
Cleaning and care of the warming drawer is easy. After each use, simply wipe out the smooth glass interior with a damp cloth.

Safe And Sound
With automatic switch-off and delayed start functionality, our warming drawers help keep dishes warm until it is time to serve the main meal.

Sized To Suit
With enough room to gently heat six place settings, 20 cappuccino cups or 42 espresso cups, our 60cm warming drawer is an ideal kitchen companion.

SPECIFICATIONS

Capacity	
Cappuccino cups	20
Espresso cups	42
Maximum allowable weight	55 lbs
Place settings	6
Usable depth	16 1/16 "
Usable height	3 7/8 "
Usable width	21 1/16 "

Cleaning	
Easy clean smooth-glass base	•

Controls	
Audio feedback	•
Automatic timers	30', 45', 1h, 2h, 4h, 6h

Electronic capacitive touch controls	•	Adjustable front door panel to align with surrounding cabinetry	•	All appliances use energy, and energy usage typically generates carbon emissions. Fisher & Paykel Appliances' In-use Energy Carbon Emissions Estimate indicates carbon emissions from a product's in-use energy. This is calculated either annually or per cycle, using the product's market-specific energy label energy consumption data multiplied by the carbon emissions factor for energy in your country or region.
On/Off indicator	•	Depth	22 5/16 "	
Pre-set heating functions	•	Height	5 1/2 "	
Push-to-open drawer	•	Width	23 7/16 "	
Soft close drawer	•			
Standby mode	•			
Functions		Safety		
Cups	•	Automatic turn off after 12 hours	•	
Dehydrate	•	Full extension slides	•	
Number of functions	6			
Plates	•	SKU	84232	
Rapid proof	•			
Slow cook	•	The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. © Fisher & Paykel Appliances Ltd 2020		
Warm	•			
Performance		Other product downloads available at fisherpaykel.com		
Heated glass base and fan	•	↓ DXF		
Low temperature cooking	•	↓ DWG		
Temperature levels	6	↓ Installation Guide (English)		
Temperature range	95°F-185°F	↓ Installation Guide (Canadian French)		
Power Requirements		↓ Installation Guide (Spanish)		
Amperage	10 A	↓ Right To Repair Declaration (English, Canadian French)		
Power outlet	3-prong grounding-type	↓ User Guide (English)		
Supply frequency	60 Hz	↓ User Guide (Canadian French)		
Supply voltage	120 V	↓ User Guide (Spanish)		
Product Dimensions		Where applicable:		



A PEACE OF MIND SALE
24 Hours 7 Days a Week Customer Support
T 1.888.936.7872 Wwww.fisherpaykel.com