

Series 9 Integrated Tall Single DishDrawer Dishwasher

Integrated




Introducing the next evolution of DishDrawer™ Dishwasher design. The Integrated Single Tall DishDrawer™ Dishwasher delivers advanced performance and quiet efficiency, with extra height to fit larger plates and cookware. Designed to integrate seamlessly within your kitchen cabinetry, it combines intuitive touch controls with a step up in energy and water efficiency for everyday living.

- Panel-ready design allows seamless integration with your kitchen cabinetry, or pair with a stainless steel door panel
- Capacitive touch controls, refined styling and SmartHQ™ connectivity bring intuitive convenience to everyday dish care
- Designed for true half-load washing, with flexible racking that fits larger dinner plates up to 12" high

- Versatile wash cycles and modifiers ensure clean results, while fan-assisted drying helps leave dishes ready to use

DIMENSIONS

Height	17 7/8 "
Width	23 9/16 "
Depth	21 3/4 "

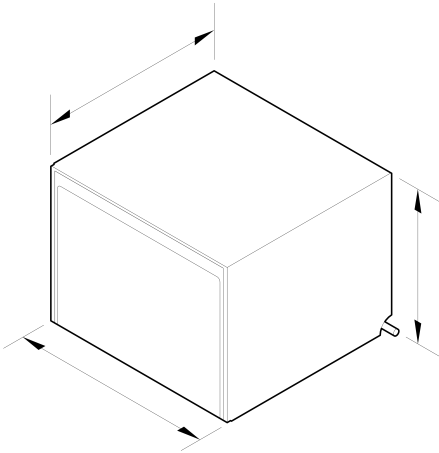

SPECIFICATIONS

Accessories (included)

Cutlery basket	•
----------------	---

Accessories (sold separately)

Door panel stainless steel	ADDD24STPX
Handle kit Contemporary brushed black	AHD7DDDW24B

Handle kit Contemporary brushed silver	AHD7DDDW24S
Handle kit Minimal black	AHM1DDDW24B
Handle kit Minimal grey	AHM1DDDW24G
Handle kit Professional round	AHP3-DWDD-SX
Handle kit Professional round flush, Brass off-stands	AHP3DDDW24BA
Handle kit Professional round flush, Dark Copper off-stands	AHP3DDDW24DC

Capacity and loading

Accommodates round plates up to	12.25"
Adjustable height, foldable cupracks	•
Fold down tines	•
Pitch adjustable tines	•
Place settings	7
Wine glass supports	•

Connected Features

Alerts and notifications	•
Education and onboarding	•
Energy consumption monitoring	•
Monitoring	•
Remote operation	•
Software updates	•

Consumption

Energy rating	Energy Star
---------------	-------------

Controls

Black touch concealed interface	•
Electronic fault/Diagnostic indicator	•

End of cycle beeps	•	Height	17 7/8 "	The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. © Fisher & Paykel Appliances Ltd 2020	
Energy saving delay start option of up to 12 hours	•	Width	23 9/16 "		
Keylock	•				
Knock to pause	•				
Rinse aid indicator light	•				
Smart appliance	•				
Features		Wash Program Modifiers			
Advanced filtration	•	Dry +	•	Other product downloads available at fisherpaykel.com ↓ DWG ↓ DXF ↓ Planning Guide (English) ↓ California Warning Proposition 65 (English, Spanish, Canadian French, Chinese)	
Fan assisted drying	•	Gentle	•		
Flood protection	•	Intensive	•		
Flow through detergent dispenser	•	Wash modifiers	3		
Motor type	BLDC				
Quiet operation	•	Wash Programs			
SmartDrive™ technology	•	60 min	•	Where applicable: All appliances use energy, and energy usage typically generates carbon emissions. Fisher & Paykel Appliances' In-use Energy Carbon Emissions Estimate indicates carbon emissions from a product's in-use energy. This is calculated either annually or per cycle, using the product's market-specific energy label energy consumption data multiplied by the carbon emissions factor for energy in your country or region. Our In-use Energy Carbon Emissions Estimate is designed to assist customers in making informed purchasing decisions when comparing different Fisher & Paykel products. For example, a heat pump dryer typically has a lower In-use Energy Carbon Emissions Estimate than a vented dryer.	
Soft close drawer	•	Eco	•		
Three-stage filtration system	•	Heavy	•		
Variable wash pressure technology	•	Hygiene	•		
		Light	•		
		Medium	•	 A PEACE OF MIND SALE 24 Hours 7 Days a Week Customer Support T 1.888.936.7872 W www.fisherpaykel.com	
Performance		Water connection			
Noise emissions	43 dBA	Inlet water temperature	140 °F		
		Water pressure	30kPa - 1000 kPa		
		Water supply	3/8" to suit Male Compression Fitting		
Power Requirements					
Dedicated Circuit (A)	5A				
Supply frequency	60 Hz				
Voltage	110 - 120V	SKU	85759		
Product Dimensions					
Depth	21 3/4 "				