


60cm Series 9 Integrated Insert Wall Rangehood

Series 9 | Integrated

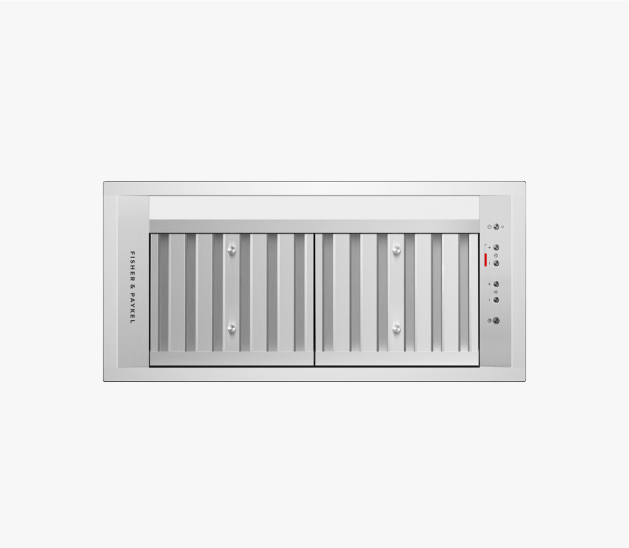


With edge-to-edge extraction, this efficient, stylish rangehood is perfectly hidden away in your cabinetry.

- With five fan speeds, select the perfect extraction rate for your cooking
- With dimmable LED strip lighting
- 700m³/hr maximum airflow
- Dishwasher safe filters that are easy to remove and clean

DIMENSIONS

| | |
|--------|--------|
| Height | 407 mm |
| Width | 580 mm |
| Depth | 280 mm |

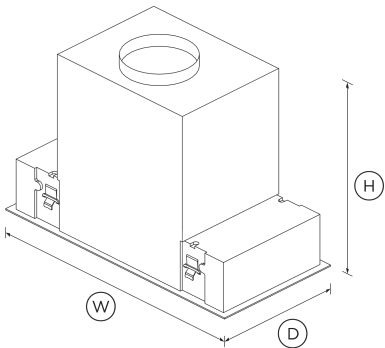

FEATURES & BENEFITS

Edge To Edge Extraction

Filters effectively reach edge to edge, which maximises the extraction area.

Full Surface Lighting

The even lighting provides full coverage of the cooktop, illuminating food in its true colour, with no hot or dark spots and no glare or shadows. The dimmable lights have fade in and fade out features.

Easy To Use

This easy to use rangehood operates with fingertip control of LED-illuminated soft touch buttons. Selected models also come with a remote control.

Energy Efficiency

Powered by a brushless DC motor, the Integrated Rangehood operates more efficiently, more reliably and with less noise than units with AC motors.

Effortless Cleaning

The stainless steel filters are easy to remove and are dishwasher safe. A self-contained grease tray within the filters makes them very easy to clean.

Simple Installation

The simple installation process is compatible with most precut cabinetry. The adjustable mounting system can be installed with a 16mm to 38mm cabinetry board.

SPECIFICATIONS

Fan ratings

| | |
|----------------------|------------------------|
| Maximum air movement | 700 m ³ /hr |
| Speed 3 sound rating | 54 dBA |

Installation and cleaning

| | |
|-------------------------|---------------|
| Air outlet size | 150 mm |
| Dishwasher safe filters | 2 |
| Ducted | Vertical only |

Performance

| | |
|-----------------|---------|
| Extraction type | Surface |
| Fan speeds | 5 |

| | |
|--------------------------|------------------------|
| Filter type | Stainless Steel Baffle |
| <hr/> | |
| Power requirements | |
| Supply voltage | 230 V |
| <hr/> | |
| Product dimensions | |
| Depth | 280 mm |
| Height | 407 mm |
| Width | 580 mm |
| <hr/> | |
| Ventilation features | |
| Auto-off/Run-on timer | • |
| Dimmable lights | • |
| Filter cleaning alert | • |
| Light type | LED strip |
| Number of light settings | 5 |
| Simple sensing | • |
| <hr/> | |
| SKU | 50138 |
| <hr/> | |

The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. © Fisher & Paykel Appliances Ltd 2020

Other product downloads available at fisherpaykel.com

- [↓](#) 2D-DWG Insert Rangehood
- [↓](#) 2D-DXF Insert Rangehood
- [↓](#) Archicad
- [↓](#) Data Sheet Insert Rangehood
- [↓](#) Installation Guide (English)
- [↓](#) Revit
- [↓](#) Rhino
- [↓](#) SketchUp
- [↓](#) User Guide Integrated Rangehood

Where applicable:

All appliances use energy, and energy usage typically generates carbon emissions. **Fisher & Paykel Appliances' In-use Energy Carbon Emissions Estimate** indicates carbon emissions from a product's in-use energy. This is calculated either annually or per cycle, using the product's market-specific energy label energy consumption data multiplied by the carbon emissions factor for energy in your country or region.

Our In-use Energy Carbon Emissions Estimate is designed to assist customers in making informed purchasing decisions when comparing different Fisher & Paykel products. For example, a heat pump dryer typically has a lower In-use Energy Carbon Emissions Estimate than a vented dryer.



A PEACE OF MIND SALE
24 Hours 7 Days a Week Customer Support
T 0800 372 273 [Wwww.fisherpaykel.com](https://www.fisherpaykel.com)