

Series 9 Integrated Double DishDrawer Dishwasher

Integrated




Introducing the next evolution of DishDrawer™ Dishwasher design. The Integrated Double DishDrawer™ Dishwasher delivers advanced performance, quiet efficiency and seamless integration within kitchen cabinetry. New wash technology offers a step up in energy and water efficiency, engineered for real life and shaped by decades of DishDrawer™ Dishwasher innovation.

- Wash one, stack another. Independent drawers run separately or together, fitting plates up to 280mm in diameter
- Capacitive touch controls, refined styling and SmartHQ™ connectivity bring intuitive convenience to everyday dish care
- Adaptable racking fits everything from glassware to cookware, offering flexibility for every occasion

- Versatile wash cycles and modifiers ensure clean results, while fan-assisted drying helps leave dishes ready to use

DIMENSIONS

Height	820 - 880 mm
Width	599 mm
Depth	553 mm

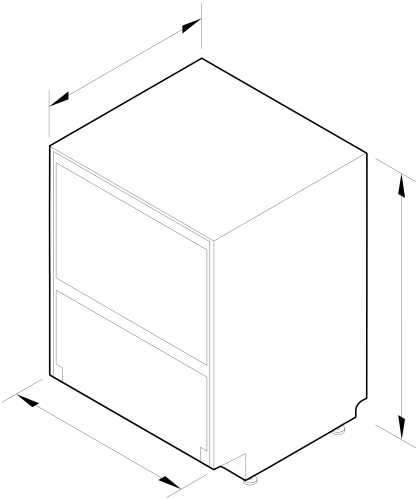

SPECIFICATIONS

Accessories (included)	
Cutlery basket	•

Accessories (sold separately)

Door panel black stainless steel	ADDD60DPB
----------------------------------	-----------

Door panel recessed handle black stainless steel	ADDD60DNB
Door panel recessed handle matte black glass	ADDD60DZB
Door panel recessed handle stainless steel	ADDD60DNX
Door panel stainless steel	ADDD60DPX
Handle kit Contemporary brushed black	AHD7DDDW60B
Handle kit Contemporary brushed silver	AHD7DDDW60S
Handle kit Contemporary square fine, black	AHD5-OBDD-60SB
Handle kit Contemporary square, black	AHD3-OBDD-60B
Handle kit Minimal black	AHM1DDDW60B
Handle kit Minimal grey	AHM1DDDW60G

Capacity and loading

Accommodates round plates up to	280mm
Adjustable height, foldable cupracks	•
Fold down tines	•
Pitch adjustable tines	•
Place settings	12
Place settings per drawer	6
Wine glass supports	•

Connected Features

Alerts and notifications	•
Consumable subscription	•
Education and onboarding	•
Energy consumption monitoring	•
Monitoring	•
Remote operation	•
Software updates	•

Consumption

Energy rating	C	Dedicated Circuit (A)	10A	SKU	85765	
		Supply frequency	50 Hz			
		Voltage	220 - 240V			
Controls						
Black touch concealed interface	•	Product dimensions	Depth	553 mm	The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. © Fisher & Paykel Appliances Ltd 2020 Other product downloads available at fisherpaykel.com ↓ DWG ↓ DXF ↓ Planning Guide (English) ↓ Revit ↓ Rhino ↓ SketchUp ↓ SketchUp	
Electronic fault/Diagnostic indicator	•		Height	820 - 880 mm		
End of cycle beeps	•		Width	599 mm		
Energy saving delay start option of up to 12 hours	•					
Keylock	•	Wash Program Modifiers				
Knock to pause	•					
Rinse aid indicator light	•					
Smart appliance	•					
		Dry +	•			
		Gentle	•			
		Intensive	•			
		Wash modifiers	3			
Features						
Advanced filtration	•	Wash Programs				
Built-in water softener	•		60 min	•		
Fan assisted drying	•		Eco	•		
Flood protection	•		Heavy	•		
Flow through detergent dispenser	•	Hygiene	•	Where applicable: All appliances use energy, and energy usage typically generates carbon emissions. Fisher & Paykel Appliances' In-use Energy Carbon Emissions Estimate indicates carbon emissions from a product's in-use energy. This is calculated either annually or per cycle, using the product's market-specific energy label energy consumption data multiplied by the carbon emissions factor for energy in your country or region. Our In-use Energy Carbon Emissions Estimate is designed to assist customers in making informed purchasing decisions when comparing different Fisher & Paykel products. For example, a heat pump dryer typically has a lower In-use Energy Carbon Emissions Estimate than a vented dryer.		
Motor type	BLDC	Light	•			
Quiet operation	•	Medium	•			
SmartDrive™ technology	•	Wash programs	6			
Soft close drawer	•					
Three-stage filtration system	•					
Variable wash pressure technology	•					
Performance		Water connection				
Noise emissions	43 dBA	Water pressure	30kPa - 1000 kPa			
		Water supply	3/4" BSP (20mm) Connector Water Inlet Hose			
Power requirements						



A PEACE OF MIND SALE
24 Hours 7 Days a Week Customer Support
T 08000 886 605 W www.fisherpaykel.com