

# Wall Rangehood, 60cm, Telescopic

Series 3 | Contemporary

White




The wall chimney rangehood has contemporary styling, extracting steam, grease and cooking odours quietly and efficiently.

- With two fan speeds, select the ideal extraction rate for your cooking
- Slides out for use when you need it, with maximum air movement of 180m<sup>3</sup>/hr
- Dishwasher safe filters that are easy to remove and clean

## DIMENSIONS

Height	181-185mm
Width	598mm
Depth	280 - 460mm

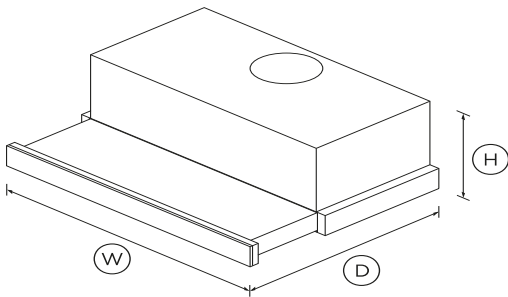

## FEATURES & BENEFITS

### Easy installation

This rangehood can be either externally ducted through the top or back or can recirculate air internally through its filters, making it perfect for apartments.

### Simple to use

Intuitive controls responds to the touch of your finger. Two halogen spotlights provide clear illumination over the entire cooking surface.

### Easy cleaning

Two filters, consisting of layers of aluminium mesh, effectively trap grease particles during extraction. They are easy to remove and dishwasher safe, or can be cleaned by hand in hot soapy water.

### Seamless integration

With the white glass front panel handles and a brushed stainless steel finish, this rangehood is designed to match the rest of the Fisher & Paykel's kitchen appliance family.

## SPECIFICATIONS

### Accessories

40mm Stainless handle	792405 (included installed)
40mm white glass handle	792394 (included)
70mm Stainless handle	792399 (not included)
Aluminium filter	792391

### Accessories (sold separately)

Eave ducting kit	PD-RHK125E
Handle required for	HS60 Part No.792399
Light bulb	791822
Recirculation carbon filter	792390
Roof ducting kit	PD-RHK125T
Side wall ducting kit	PD-RHK125W

### Fan ratings

Maximum air movement	180m <sup>3</sup> /hr
Maximum sound rating	64dBA

### Installation and cleaning

Dishwasher safe filters	2
-------------------------	---

Ducted	Top and back extraction
Recirculation	Optional - top and back
<hr/>	
Performance	
Extraction type	Surface
Fan speeds	2
Filter type	Mesh
Number of filters	2
<hr/>	
Power requirements	
Supply frequency	50Hz
Supply voltage	220-240V
<hr/>	
Product dimensions	
Depth	280 - 460mm
Height	181-185mm
Width	598mm
<hr/>	
Product information	
Control type	Switch
<hr/>	
Ventilation features	
Light type	LED
<hr/>	
Warranty	
Parts and labour	2 years
<hr/>	
SKU	50015
<hr/>	

The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. ? Fisher & Paykel Appliances Ltd 2020

Other product downloads available at [fisherpaykel.com](https://fisherpaykel.com)

- [↓](#) Service & Warranty
- [↓](#) User Guide
- [↓](#) Installation Guide



**A PEACE OF MIND SALE**  
**24 Hours 7 Days a Week Customer Support**  
**T** 1300 650 590 **W**[www.fisherpaykel.com](https://www.fisherpaykel.com)