

PLANNING GUIDE

24" LAUNDRY FRONT LOADERS

—

OCTOBER 2017

FISHER & PAYKEL


CONTENTS

<hr/>		
WH2424F1 & WH2424P1		
single product install	in	mm
<hr/>		
Product & Cavity Dimensions	4	14
Max Distance of Hose & Cord	5	15
<hr/>		
DE4024P1		
single product install	in	mm
Product & Cavity Dimensions	6	16
Max Distance of Hose & Cord	7	17
<hr/>		
WH2424F1, WH2424P1 & DE4024P1		
laundry pair - stack install	in	mm
Image of stack install	8	18
Exploded iso view of products and parts	9	19
Clearance & Cavity Dimensions	10	20
<hr/>		
WH2424F1, WH2424P1 & DE4024P1		
laundry pair - side by side install	in	mm
Image of side by side install	11	21
Clearance & Cavity Dimensions	12	22
<hr/>		


IMPERIAL

FISHER & PAYKEL


PRODUCT & CAVITY DIMENSIONS 24" Front Loading Washer

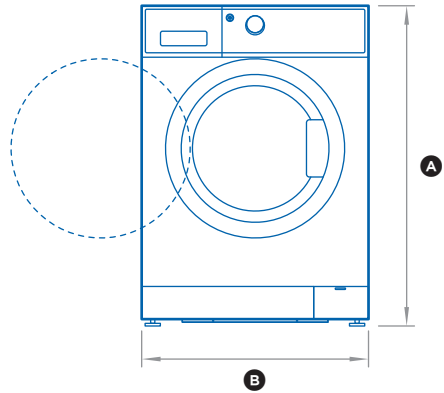


FRONT VIEW

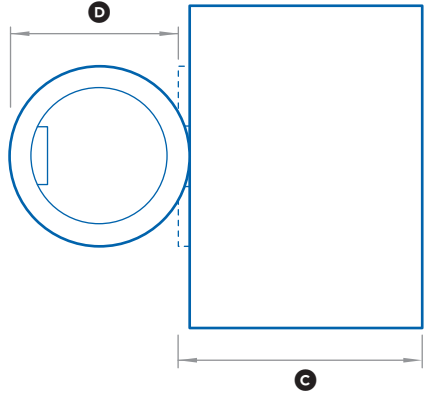

PROFILE VIEW

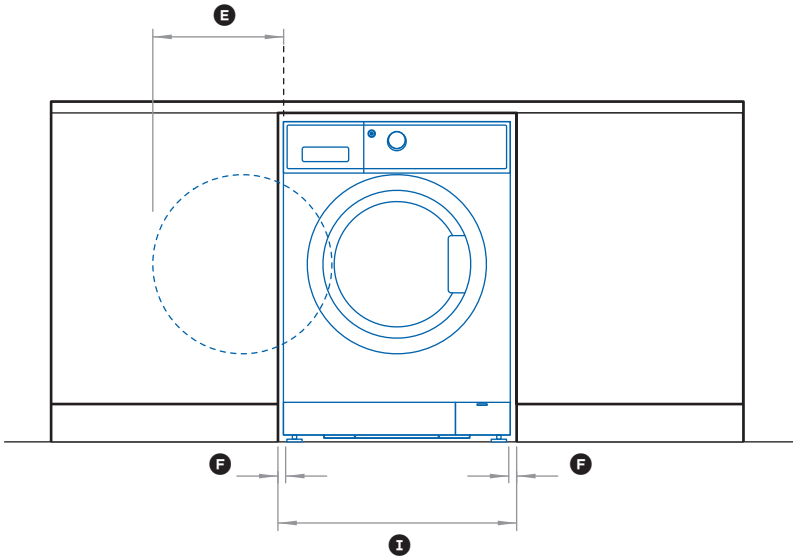

FRONT VIEW

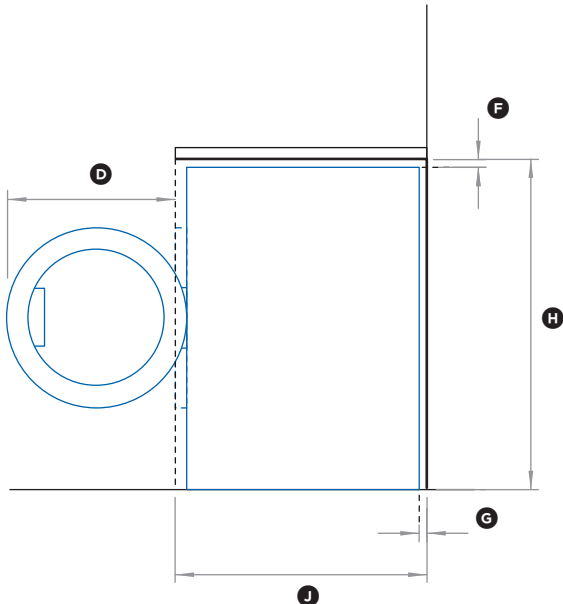

PROFILE VIEW

Model no:
Front Loading Washer
WH2424F1, WH2424P1

Product Dimensions	in
Ⓐ Overall height of product*	33 1/4" - 33 5/8"
Ⓑ Overall width of product	23 7/16"
Ⓒ Overall depth of product (including dial and door when closed)	25 3/8"

*Includes adjustable mounted feet

Door Opening & Clearance Dimensions	in
Ⓓ Depth of door (widest opening) measured from front of door	17 5/16"
Ⓔ Minimum washer door clearance to adjacent wall	13"
Ⓕ Minimum cabinetry gap clearance from edge of product	3/4"
Ⓖ Minimum cabinetry gap clearance from rear of product	1"

Cavity Dimensions	in
Ⓙ Minimum cavity height	34 1/4"
Ⓚ Minimum cavity width	25"
Ⓛ Minimum cavity depth*	26 3/8"

*Measured to front of laundry products, including dial and door.

DATE: 20.10.2017

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com


FISHER & PAYKEL

MAX DISTANCE OF HOSE AND CORD Front Load Washer Connections

Model no:
WH2424F1, WH2424P1

Approximate length of supplied cable and hoses routed either side.

All front load washers have inbuilt water heaters.

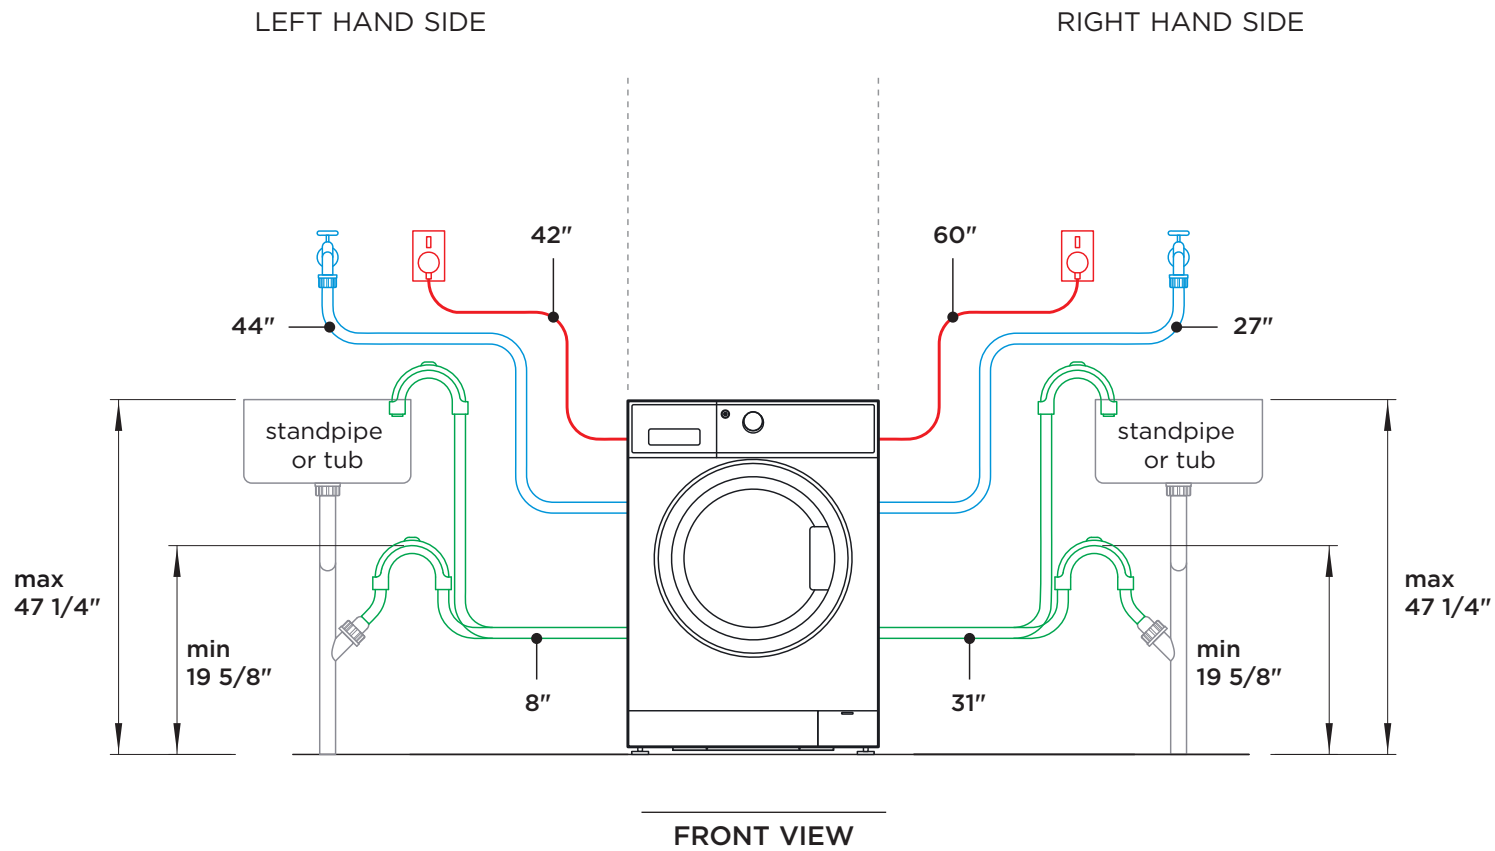

Specifications	
Electrical	
Supply	120 VAC, 60 Hz
Service	15 amp circuit
Plumbing	
Pressure	max 1 MPa (150psi) min 30 kPa (4.5psi)
Flow rate at tap	min 1 1/2 gallons/min
Cold water temp	max 95°F
Hot water temp	max 149°F


All front load washers have inbuilt water heaters.

DATE: 20.10.2017


IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

FISHER & PAYKEL


PRODUCT & CAVITY DIMENSIONS 24" Front Loading Dryer

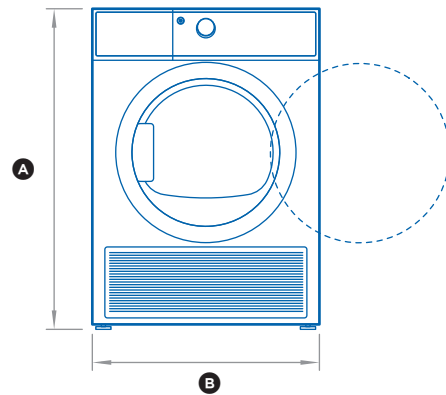


FRONT VIEW

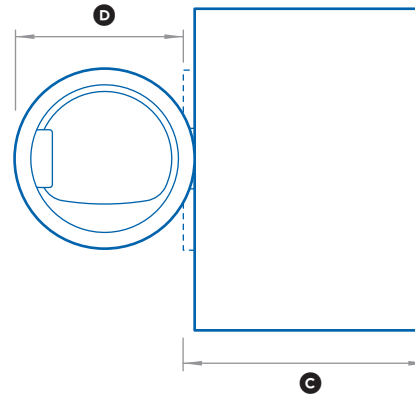

PROFILE VIEW

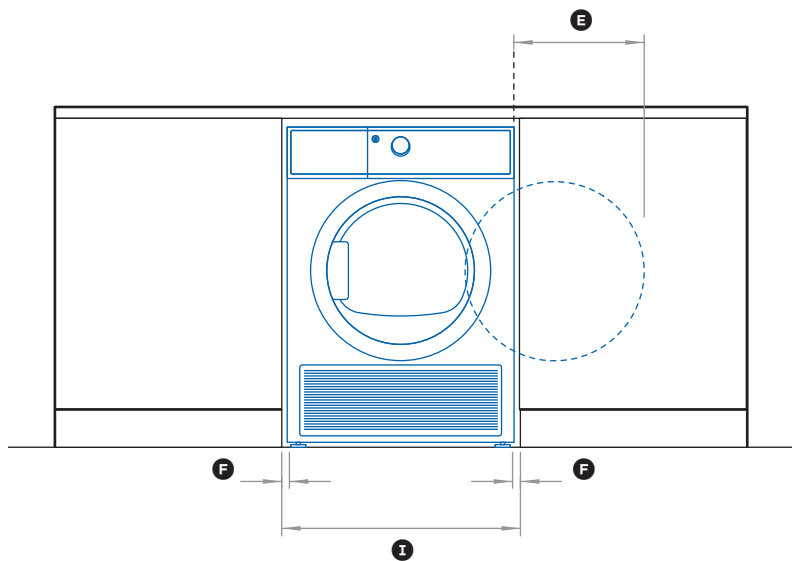

FRONT VIEW

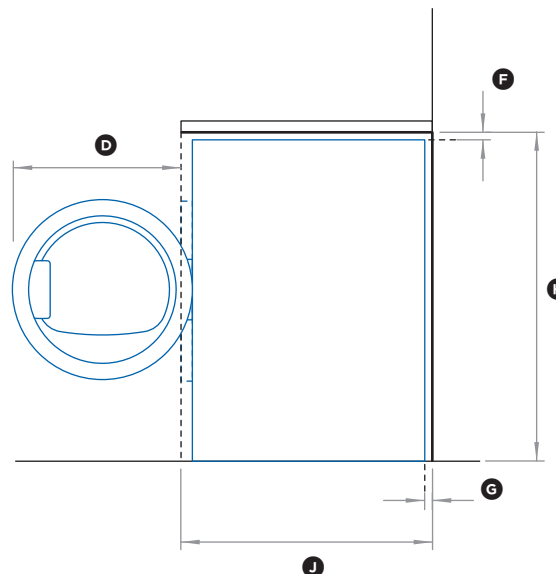

PROFILE VIEW

Model no:

Condensing Dryer
DE4024P1

Product Dimensions

	in
Ⓐ Overall height of product*	33 1/4" - 33 5/8"
Ⓑ Overall width of product	23 7/16"
Ⓒ Overall depth of product (including dial and door when closed)	25 3/8"

*Includes adjustable mounted feet

Door Opening & Clearance Dimensions

	in
Ⓓ Depth of door (widest opening) measured from front of door	17 5/16"
Ⓔ Minimum dryer door clearance to adjacent wall	12 3/16"
Ⓕ Minimum cabinetry gap clearance from edge of product	3/4"
Ⓖ Minimum cabinetry gap clearance from rear of product	1"

Cavity Dimensions

	in
Ⓙ Minimum cavity height	34 1/4"
Ⓚ Minimum cavity width	25"
Ⓛ Minimum cavity depth*	26 3/8"

*Measured to front of laundry products, including dial and door.

DATE: 20.10.2017

IMPORTANT NOTE: Throughout this guide, dimensions may vary by $\pm 2\text{mm}$ (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com


FISHER & PAYKEL

MAX DISTANCE OF HOSE AND CORDS Condensing Dryer Connections

Model no:

DE4024P1

Approximate length of supplied cable and hoses routed either side.

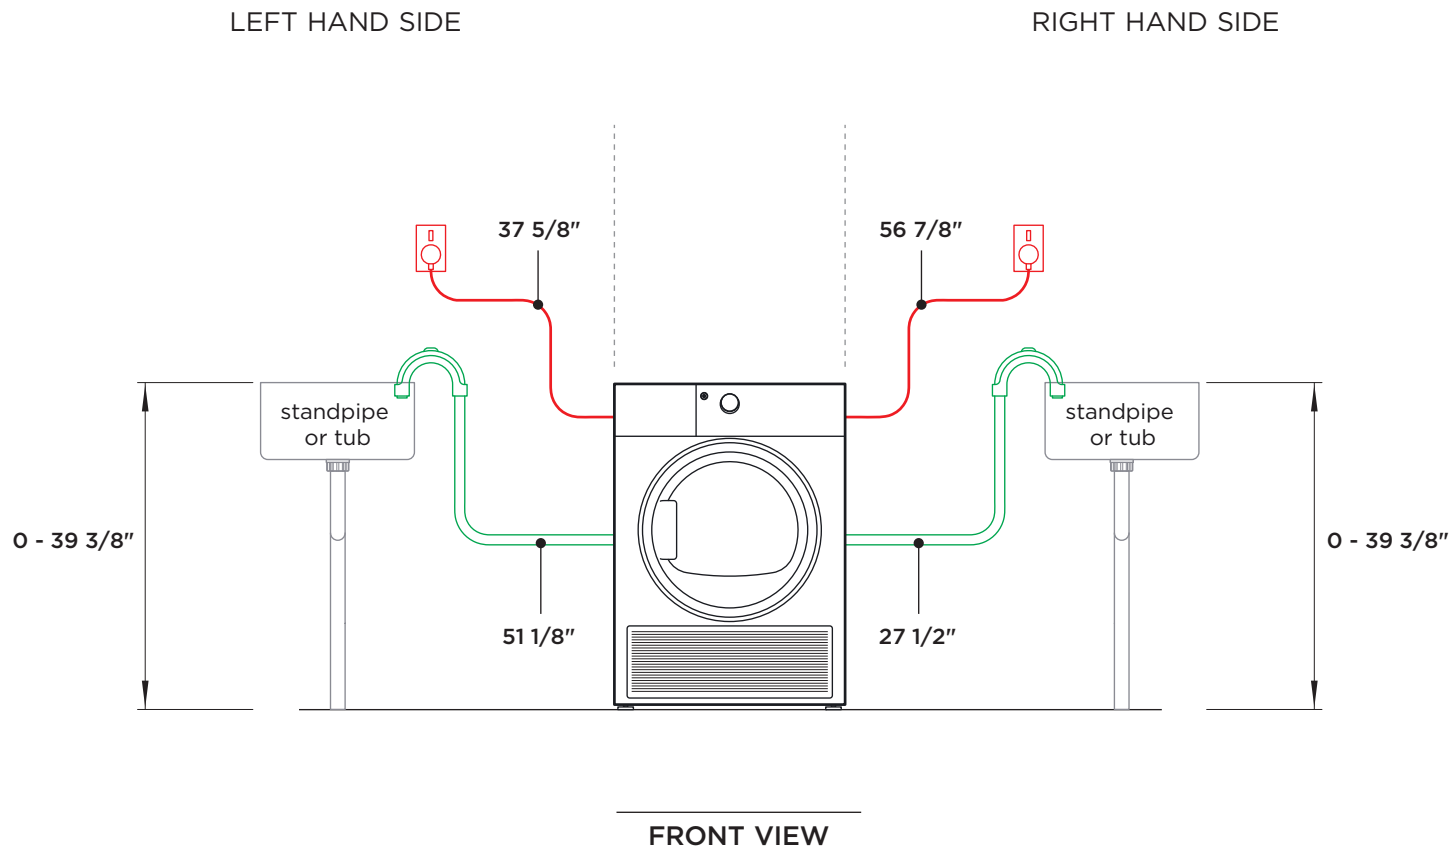

Specifications

Electrical

Supply	240 VAC, 60 Hz
Service	30 amp circuit
Heating Power	1800W

Condensing dryers produce water that either collects to a removable tank, or drains to standpipe or tub.

DATE: 20.10.2017

IMPORTANT NOTE: Throughout this guide, dimensions may vary by $\pm 2\text{mm}$ (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com



FISHER & PAYKEL


PRODUCTS
24" Front Loading Laundry Pair - Stack

Model no:

Front Loading Washer
WH2424F1, WH2424P1

Condensing Dryer
DE4024P1

Stacking Kit
Part No. HO180800810A

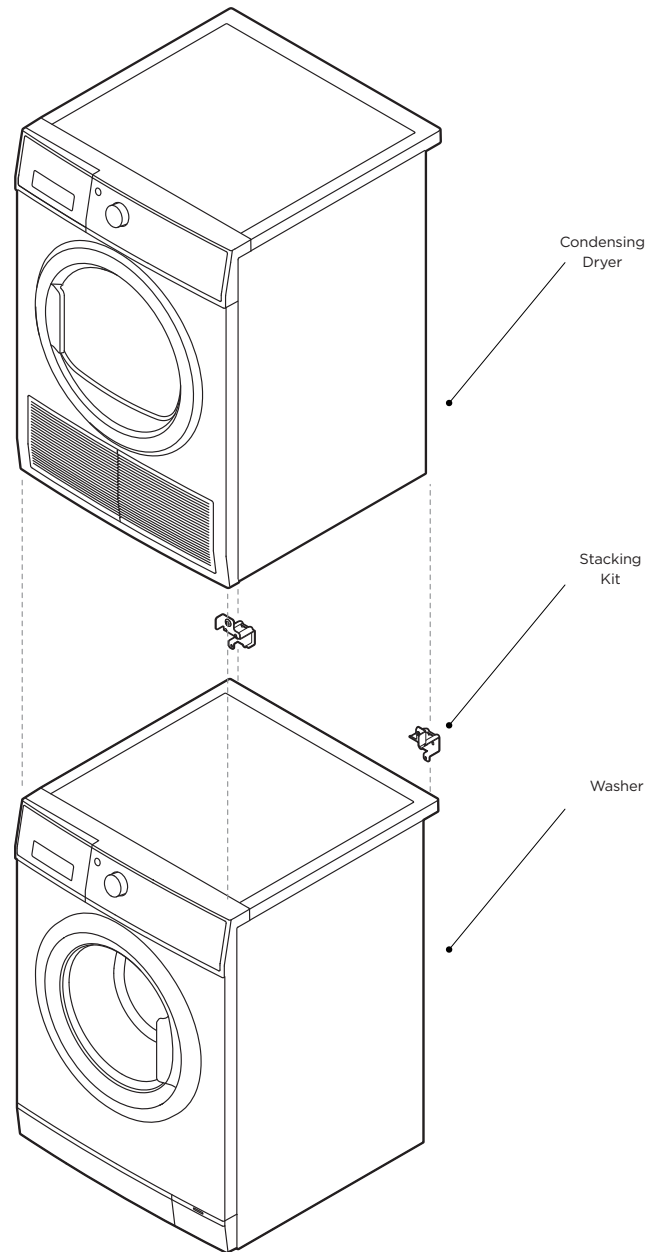

EXPLODED ISO VIEW

DATE: 20.10.2017

IMPORTANT NOTE: Throughout this guide, dimensions may vary by $\pm 2\text{mm}$ (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

FISHER & PAYKEL


CLEARANCE & CAVITY DIMENSIONS 24" Front Loading Laundry Pair - Stack

Model no:


Front Loading Washer
WH2424F1, WH2424P1

Condensing Dryer
DE4024P1

Stacking Kit
Part No. HO180800810A

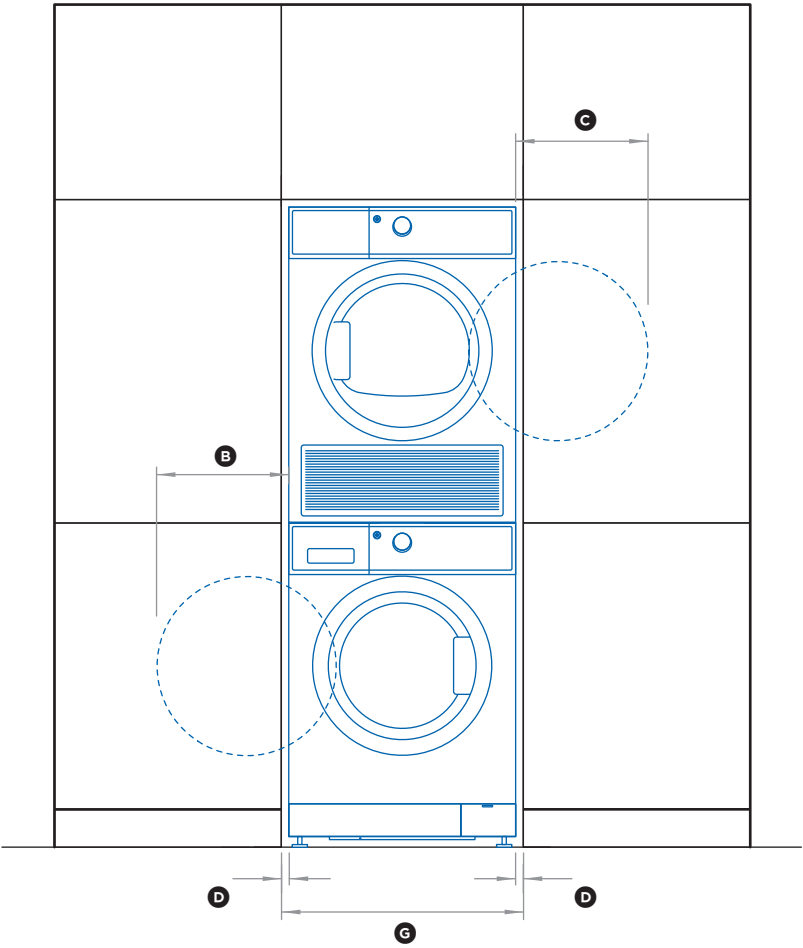

FRONT VIEW

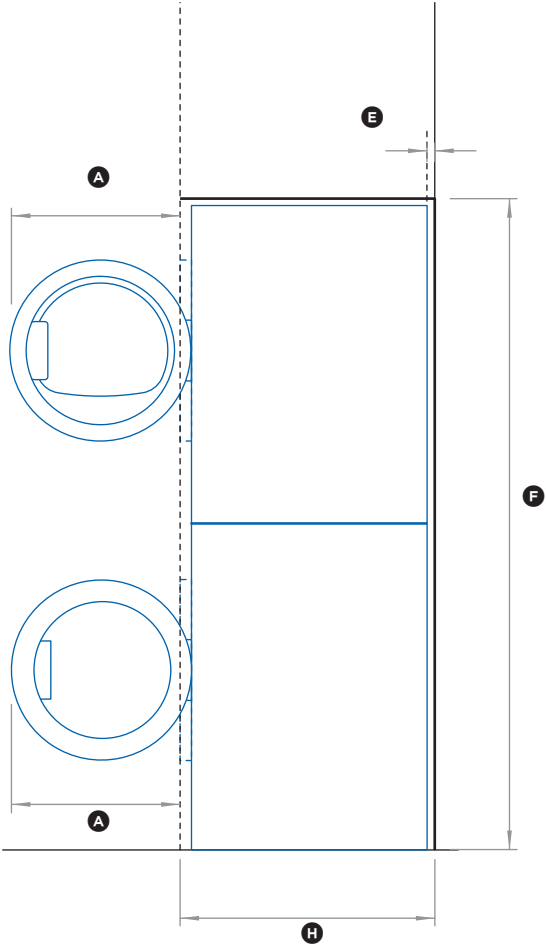

PROFILE VIEW

Door Opening & Clearance Dimensions	in
Ⓐ Depth of door (widest opening) measured from front of door	17 5/16"
Ⓑ Minimum washer door clearance to adjacent wall	13"
Ⓒ Minimum dryer door clearance to adjacent wall	12 3/16"
Ⓓ Minimum cabinetry gap clearance from edge of product	3/4"
Ⓔ Minimum cabinetry gap clearance from rear of product	1"

Cavity Dimensions	in
Ⓒ Minimum cavity height	67 3/4"
Ⓓ Minimum cavity width	25"
Ⓔ Minimum cavity depth*	26 3/8"

*Measured to front of laundry products, including dials and doors.


DATE: 20.10.2017

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com




FISHER & PAYKEL


CLEARANCE & CAVITY DIMENSIONS 24" Front Loading Laundry Pair - Side by Side

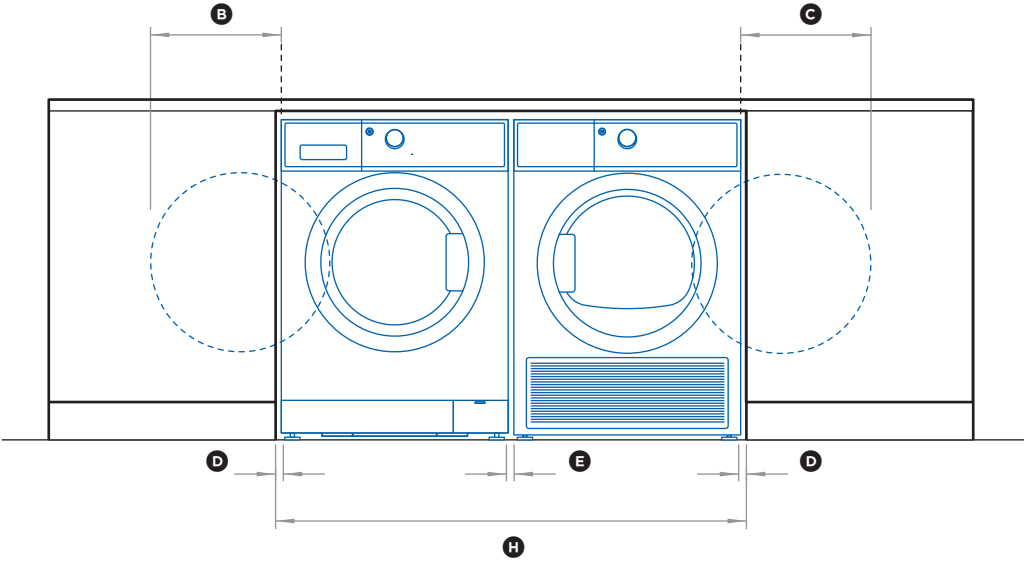

FRONT VIEW

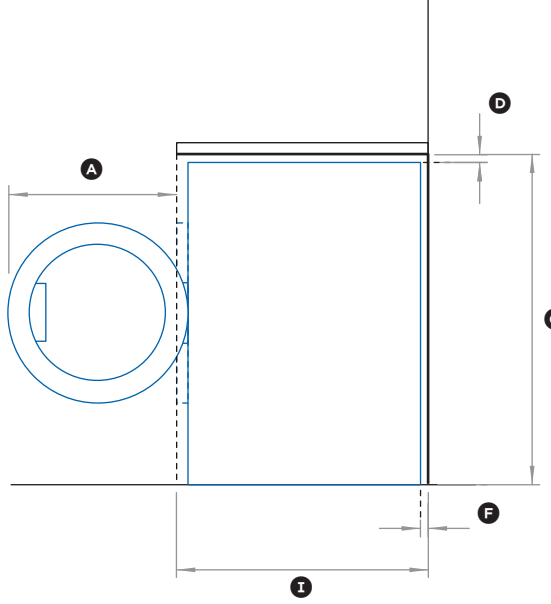

PROFILE VIEW
WASHER

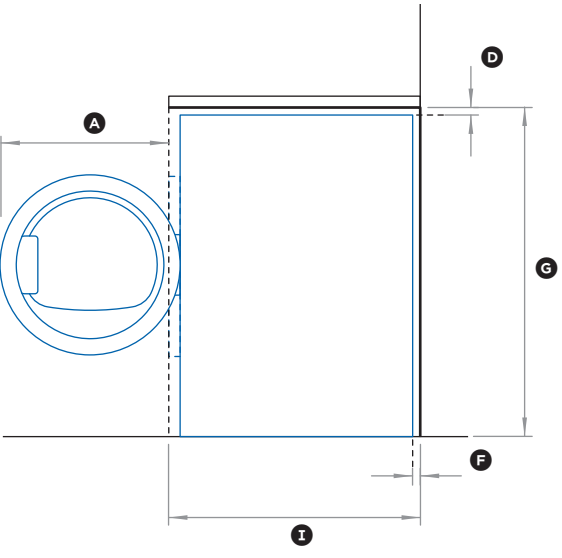

PROFILE VIEW
DRYER

Model no:
Front Loading Washer
 WH2424F1, WH2424P1

Condensing Dryer
 DE4024P1

Door Opening & Clearance Dimensions	in
Ⓐ Depth of door (widest opening) measured from front of door	17 5/16"
Ⓑ Minimum washer door clearance to adjacent wall	13"
Ⓒ Minimum dryer door clearance to adjacent wall	12 3/16"
Ⓓ Minimum cabinetry gap clearance from edge of product	3/4"
Ⓔ Minimum gap clearance between product	3/4"
Ⓕ Minimum cabinetry gap clearance from rear of product	1"

Cavity Dimensions	in
Ⓒ Minimum cavity height	34 1/4"
Ⓓ Minimum cavity width	49 3/16"
Ⓔ Minimum cavity depth*	26 3/8"

*Measured to front of laundry products, including dials and doors.

DATE: 20.10.2017

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com


METRIC

FISHER & PAYKEL


PRODUCT & CAVITY DIMENSIONS 24" Front Loading Washer

Model no:

Front Loading Washer
WH2424F1, WH2424P1

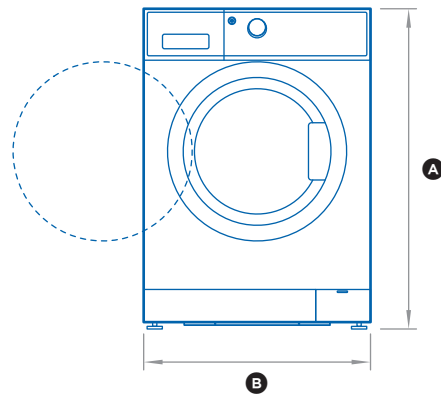

FRONT VIEW

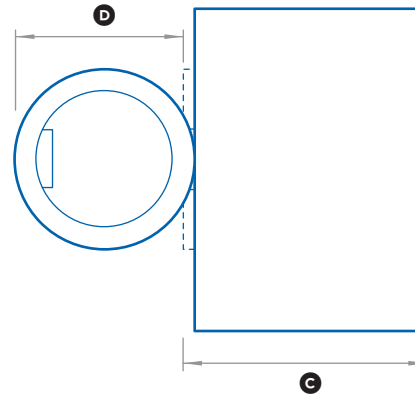


PROFILE VIEW


Product Dimensions	mm
Ⓐ Overall height of product*	845 - 854
Ⓑ Overall width of product	595
Ⓒ Overall depth of product (including dial and door when closed)	645

*Includes adjustable mounted feet

Door Opening & Clearance Dimensions	mm
Ⓓ Depth of door (widest opening) measured from front of door	440
Ⓔ Minimum washer door clearance to adjacent wall	330
Ⓕ Minimum cabinetry gap clearance from edge of product	20
Ⓖ Minimum cabinetry gap clearance from rear of product	25

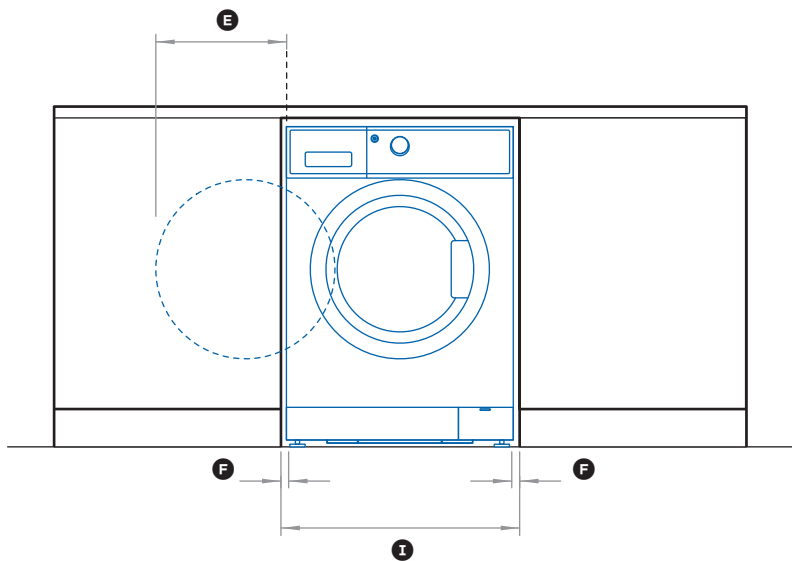

FRONT VIEW

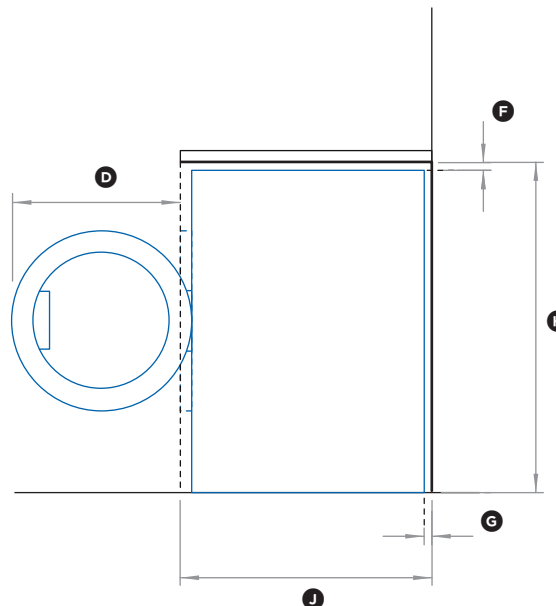

PROFILE VIEW

Cavity Dimensions	mm
Ⓜ Minimum cavity height	870
Ⓨ Minimum cavity width	635
Ⓩ Minimum cavity depth*	670

*Measured to front of laundry products, including dial and door.

DATE: 20.10.2017

IMPORTANT NOTE: Throughout this guide, dimensions may vary by $\pm 2\text{mm}$ (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

FISHER & PAYKEL


MAX DISTANCE OF HOSE AND CORD Front Load Washer Connections

Model no:

WH2424F1, WH2424P1

Approximate length of supplied cable and hoses routed either side.

All front load washers have inbuilt water heaters.

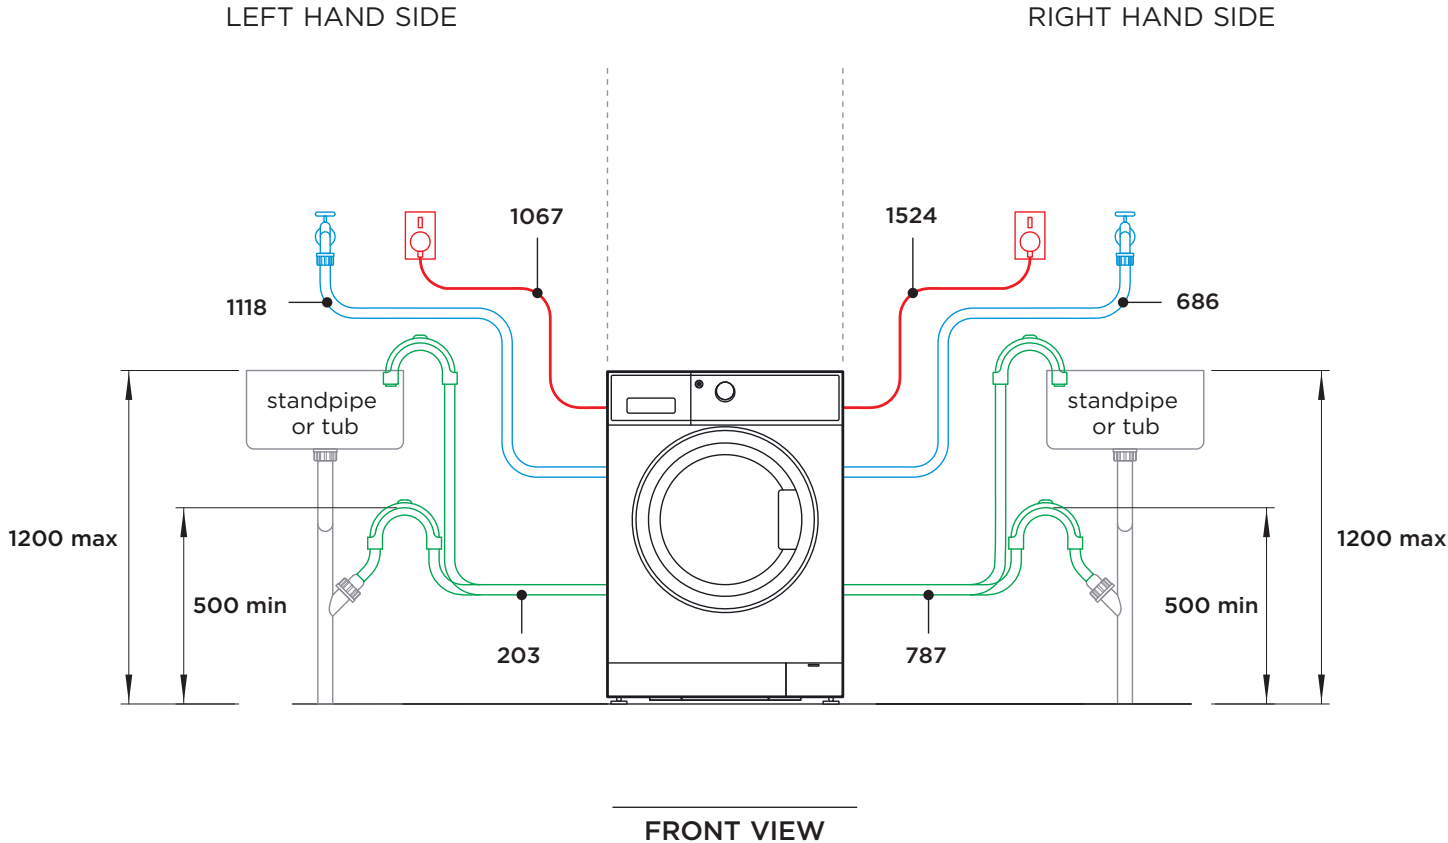

Specifications	
Electrical	
Supply	120 VAC, 60 Hz
Service	15 amp circuit
Plumbing	
Pressure	max 1 MPa (150psi) min 30 kPa (4.5psi)
Flow rate at tap	min 1 1/2 gallons/min
Cold water temp	max 95°F
Hot water temp	max 149°F

All front load washers have inbuilt water heaters.


DATE: 20.10.2017

IMPORTANT NOTE: Throughout this guide, dimensions may vary by $\pm 2\text{mm}$ (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com


FISHER & PAYKEL

PRODUCT & CAVITY DIMENSIONS 24" Front Loading Dryer

Model no:
Condensing Dryer
DE4024P1

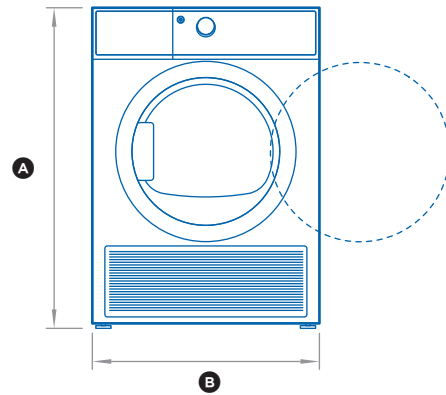

FRONT VIEW

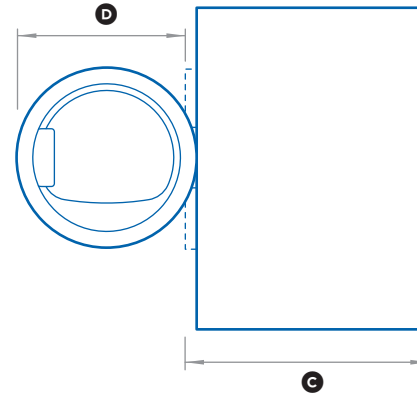

PROFILE VIEW


Product Dimensions	mm
Ⓐ Overall height of product*	845 - 854
Ⓑ Overall width of product	595
Ⓒ Overall depth of product (including dial and door when closed)	645

*Includes adjustable mounted feet


Door Opening & Clearance Dimensions	mm
Ⓓ Depth of door (widest opening) measured from front of door	440
Ⓔ Minimum dryer door clearance to adjacent wall	310
Ⓕ Minimum cabinetry gap clearance from edge of product	20
Ⓖ Minimum cabinetry gap clearance from rear of product	25

Cavity Dimensions	mm
Ⓜ Minimum cavity height	870
Ⓝ Minimum cavity width	635
Ⓞ Minimum cavity depth*	670

*Measured to front of laundry products, including dial and door.

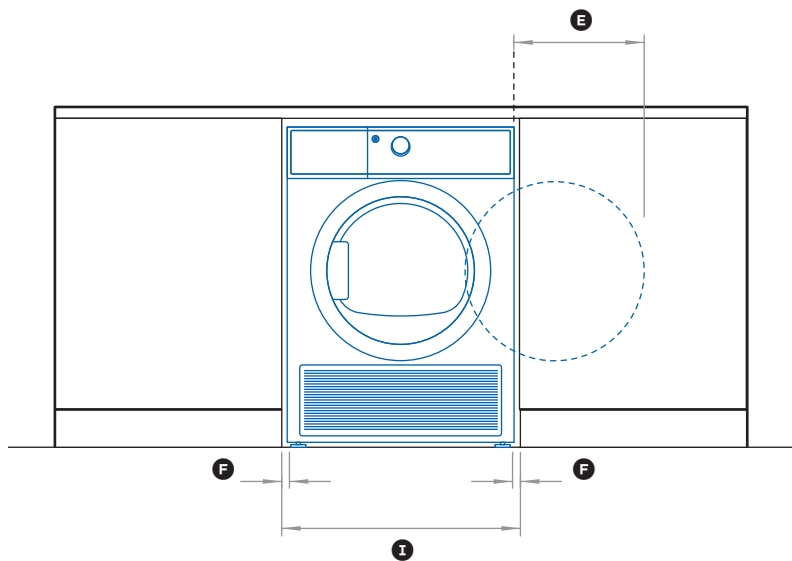

FRONT VIEW

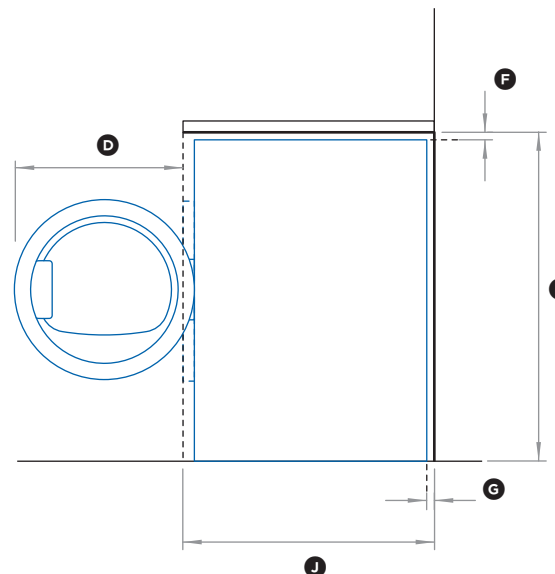

PROFILE VIEW

DATE: 20.10.2017

IMPORTANT NOTE: Throughout this guide, dimensions may vary by $\pm 2\text{mm}$ (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

FISHER & PAYKEL

MAX DISTANCE OF HOSE AND CORDS Condensing Dryer Connections


Model no:

DE4024P1

Approximate length of supplied cable and hoses routed either side.

LEFT HAND SIDE

RIGHT HAND SIDE

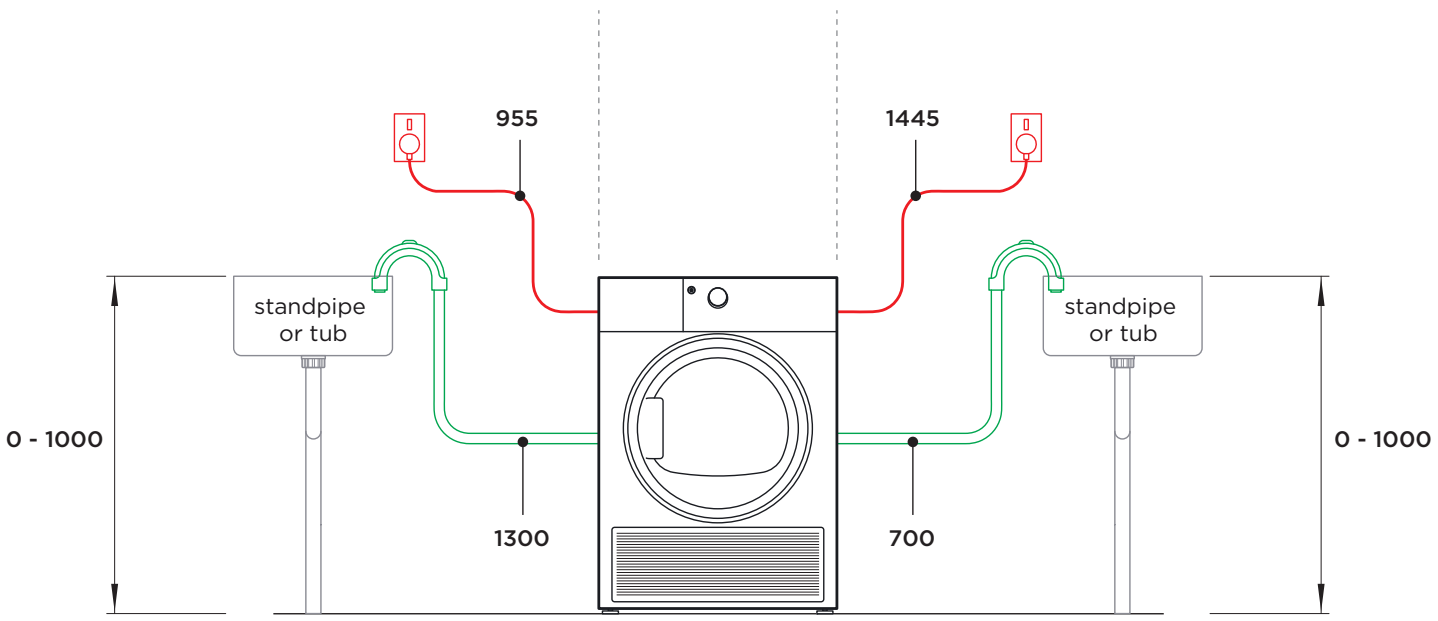

FRONT VIEW

Specifications	
Electrical	
Supply	240 VAC, 60 Hz
Service	30 amp circuit
Heating Power	1800W

Condensing dryers produce water that either collects to a removable tank, or drains to standpipe or tub.

DATE: 20.10.2017

IMPORTANT NOTE: Throughout this guide, dimensions may vary by $\pm 2\text{mm}$ (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com



FISHER & PAYKEL


PRODUCTS
24" Front Loading Laundry Pair - Stack

Model no:

Front Loading Washer
WH2424F1, WH2424P1

Condensing Dryer
DE4024P1

Stacking Kit
Part No. HO180800810A

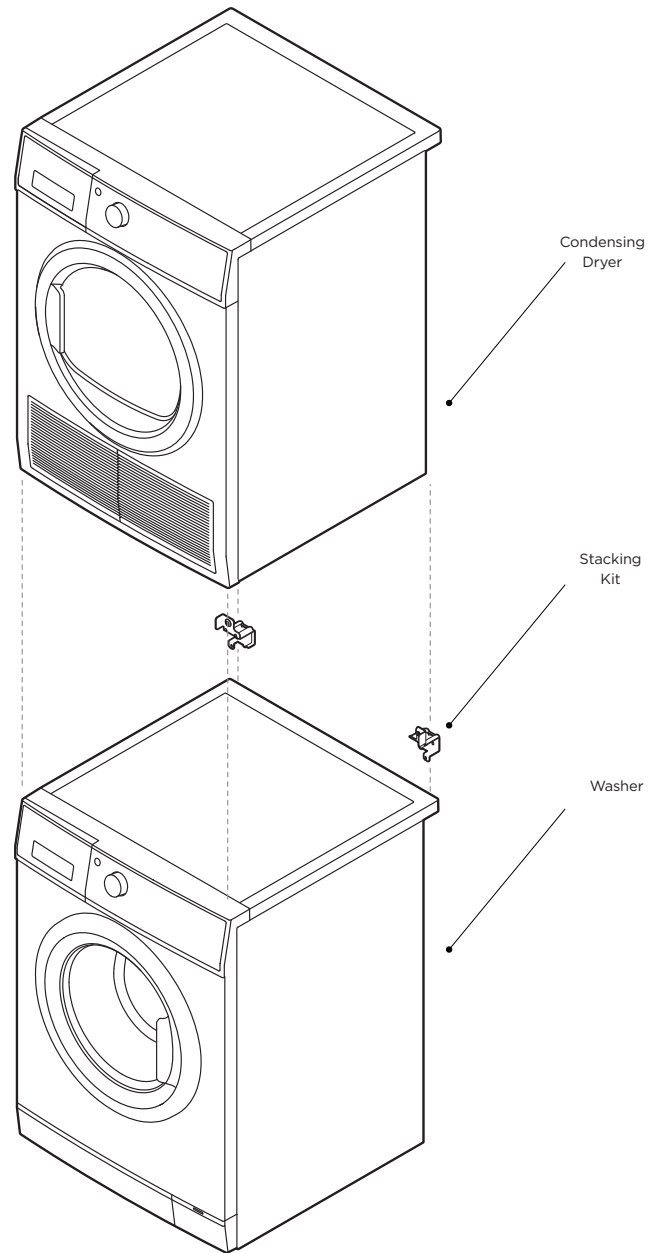

EXPLODED ISO VIEW

DATE: 20.10.2017

IMPORTANT NOTE: Throughout this guide, dimensions may vary by $\pm 2\text{mm}$ (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

FISHER & PAYKEL


CLEARANCE & CAVITY DIMENSIONS 24" Front Loading Laundry Pair - Stack

Model no:


Front Loading Washer
WH2424F1, WH2424P1

Condensing Dryer
DE4024P1

Stacking Kit
Part No. HO180800810A

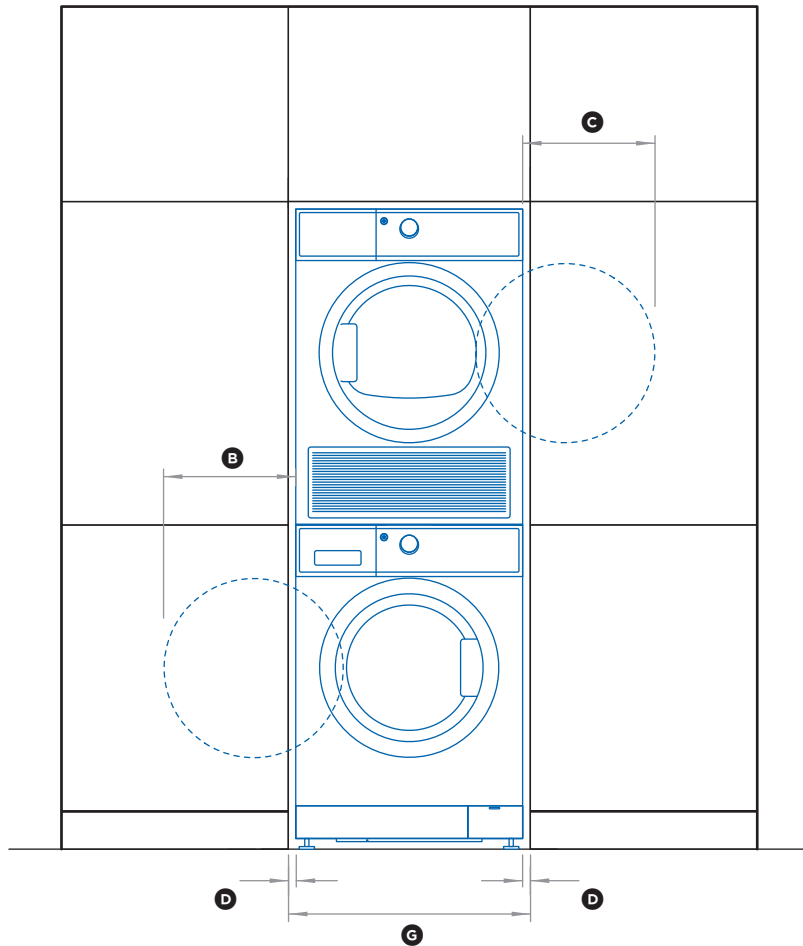

FRONT VIEW

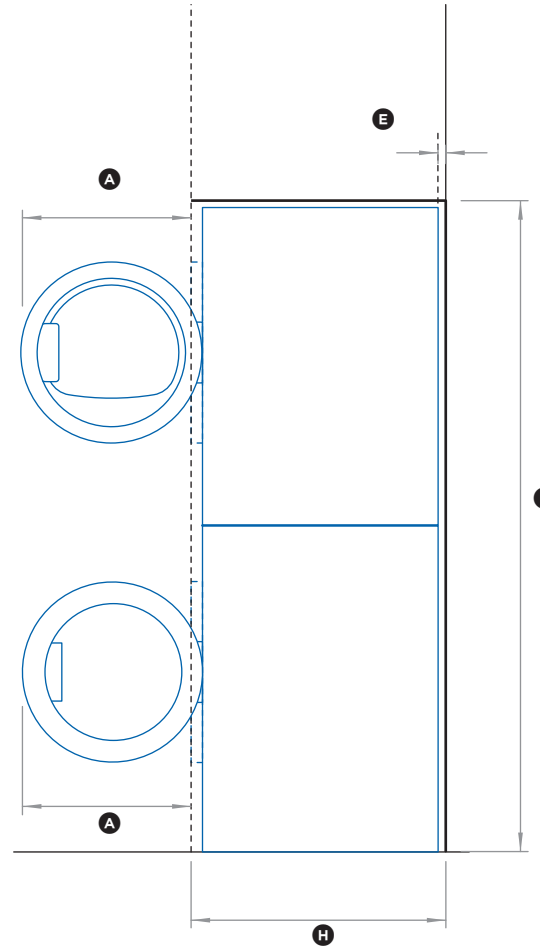

PROFILE VIEW

Door Opening & Clearance Dimensions	mm
Ⓐ Depth of door (widest opening) measured from front of door	440
Ⓑ Minimum washer door clearance to adjacent wall	330
Ⓒ Minimum dryer door clearance to adjacent wall	310
Ⓓ Minimum cabinetry gap clearance from edge of product	20
Ⓔ Minimum cabinetry gap clearance from rear of product	25

Cavity Dimensions	mm
Ⓕ Minimum cavity height	1720
Ⓖ Minimum cavity width	635
Ⓖ Minimum cavity depth*	670

*Measured to front of laundry products, including dials and doors.


DATE: 20.10.2017

IMPORTANT NOTE: Throughout this guide, dimensions may vary by $\pm 2\text{mm}$ (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com




FISHER & PAYKEL


CLEARANCE & CAVITY DIMENSIONS 24" Front Loading Laundry Pair - Side by Side

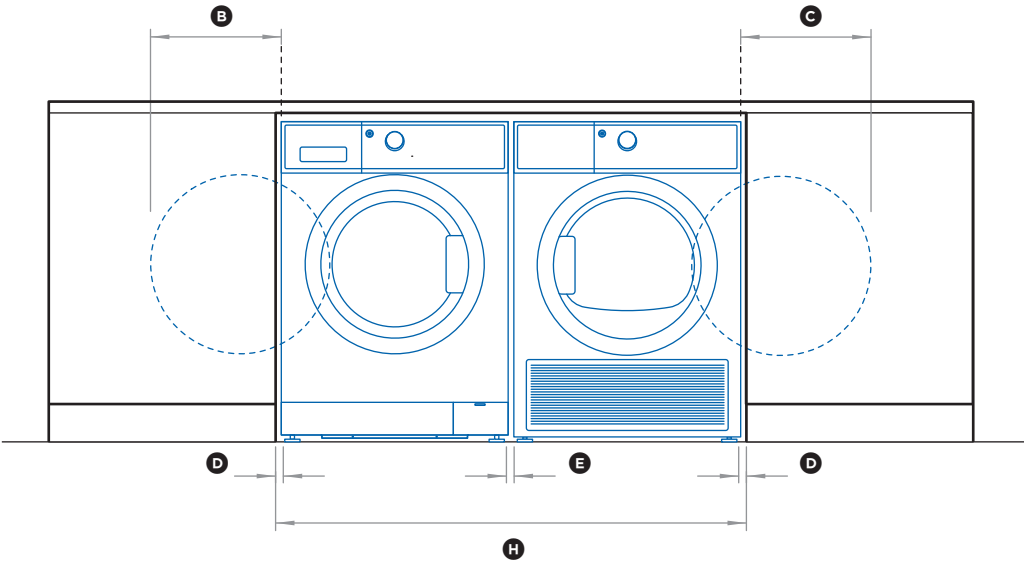

FRONT VIEW

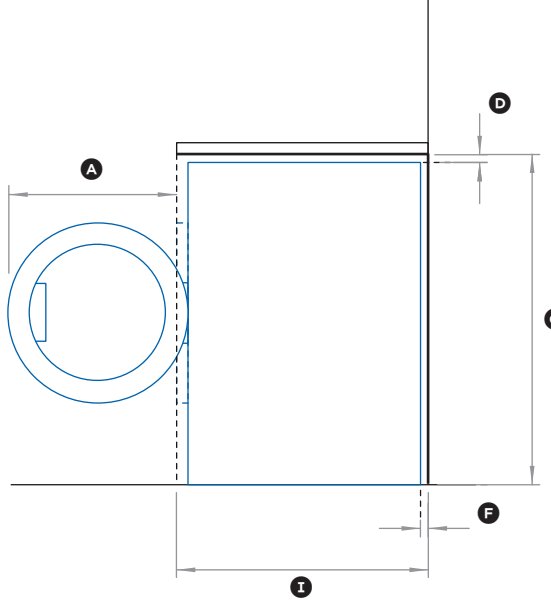

PROFILE VIEW
WASHER

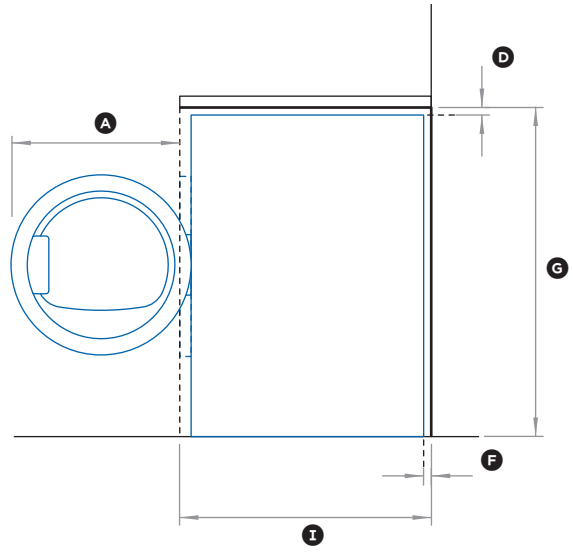

PROFILE VIEW
DRYER

Model no:
Front Loading Washer
 WH2424F1, WH2424P1

Condensing Dryer
 DE4024P1

Door Opening & Clearance Dimensions	mm
Ⓐ Depth of door (widest opening) measured from front of door	440
Ⓑ Minimum washer door clearance to adjacent wall	330
Ⓒ Minimum dryer door clearance to adjacent wall	310
Ⓓ Minimum cabinetry gap clearance from edge of product	20
Ⓔ Minimum gap clearance between product	20
Ⓕ Minimum cabinetry gap clearance from rear of product	25

Cavity Dimensions	mm
Ⓒ Minimum cavity height	870
Ⓓ Minimum cavity width	1250
Ⓔ Minimum cavity depth*	670

*Measured to front of laundry products, including dials and doors.

DATE: 20.10.2017
 IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

IMPORTANT NOTE: The product dimensions and specifications apply at the date of issue. Under our policy of continuous product improvement, these dimensions and specifications may change at any time. Dimensions may vary by $\pm 3/32"$. Please read the installation manual for detailed information on installing the product or visit fisherpaykel.com.

FISHER & PAYKEL