

60cm Series 9 Minimal Compact Combi-Steam Oven


Minimal



- Reduce the need for oils and fats with steam cooking, paired with a convection oven for cooking flexibility.
- 36L total capacity
 - Cooking flexibility with nine oven functions, including five Steam functions, Grill and Fan Forced
 - Steam cooking allows you to cook a food in its own juices, to retain nutrients and flavour
 - Designed to match aesthetically with companion products such as warming drawers, for flexible cooking configurations

DIMENSIONS

Height	458 mm
Width	596 mm
Depth	562 mm

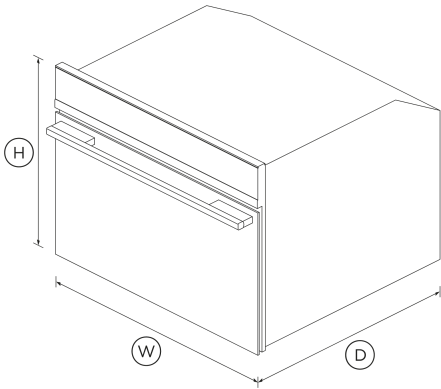

FEATURES & BENEFITS

- Sized To Suit**
The compact 46cm height means this Combination Steam Oven can be placed almost anywhere. companion products share the same dimensions and can be installed in multiple configurations to suit your kitchen design and preference.
- Cooking Flexibility**
The Combination Steam Oven allows ingredients to retain their nutrients, moisture content and colouration. With nine oven modes, it doesn't just Steam, but also has Grill and Fan functions.
- Easy To Use**
An easy to use, intuitive display shows the time and provides useful information about functions along with a refill alert.
- Beauty Of Choice**

- With the choice of a stylish stainless steel or elegant black trim, our companion products help you achieve a coherent kitchen aesthetic that suits your design style.
- Easy Cleaning**
Cleaning and care of the Combination Steam Oven is easy. Simply wipe the smooth stainless steel interior with a dry cloth after each use.
- Safe And Sound**
The CoolTouch door is safe to touch from the outside, protecting your hands and the surrounding cabinetry.
- SPECIFICATIONS**
- | | |
|-------------------------------|---|
| Accessories (included) | |
| Baking pan | 1 |
| Perforated baking tray | 1 |
| Wire shelf | 1 |
| Wired temperature sensor | 1 |
- | | |
|--------------------------------------|--------------------|
| Accessories (sold separately) | |
| Optional lower trim kit | Part 81662 (478mm) |
- | | |
|---------------------|------|
| Capacity | |
| Shelf positions | 3 |
| Total capacity | 36 L |
| Usable capacity | 29 L |
| Water tank capacity | 1L |
- | | |
|-------------------------------------|---|
| Cleaning | |
| Easy clean stainless steel interior | • |
| Easy to clean formed side racks | • |

Removable water tank	•	Product dimensions		↓ Restriction of the Use of Hazardous Substances (Chinese)
		Depth	562 mm	↓ Restriction of the Use of Hazardous Substances (Chinese)
		Height	458 mm	↓ SketchUp
		Width	596 mm	↓ SketchUp - 600mm Trim
				↓ SketchUp - 760mm Trim
				↓ User Guide (English)
				↓ User Guide (Chinese)
Controls		Safety		
Audio feedback	•	Control panel key lock	•	Where applicable:
Automatic cooking/minute timer	•	CoolTouch door	•	
Celsius/Fahrenheit temperature	•			All appliances use energy, and energy usage typically generates carbon emissions. Fisher & Paykel Appliances' In-use Energy Carbon Emissions Estimate indicates carbon emissions from a product's in-use energy. This is calculated either annually or per cycle, using the product's market-specific energy label energy consumption data multiplied by the carbon emissions factor for energy in your country or region.
Electronic capacitive touch controls	•			
Electronic oven control	•			
Intuitive touchscreen display	•			
		SKU	81936	
Functions				
Fan forced	•			
Fan grill	•			
Grill	•			
Number of functions	9			
Ring + grill	•			
Steam + ring	•			
Steam 100 (100°C / 210°F)	•			
Steam 130 (130°C / 265°F)	•			
Steam assist	•			
Steam clean (oven)	•			
Performance		Other product downloads available at fisherpaykel.com		
Grill power	1500 W	↓ DXF		
Steam generator	1800 W	↓ Archicad		
		↓ Archicad - Bottom Trim		
		↓ Archicad - 760mm Trim		
		↓ DWG		
		↓ Installation Guide (English)		
		↓ Installation Guide (Chinese)		
		↓ Revit		
		↓ Revit - 600mm Trim		
		↓ Revit - 760mm Trim		
		↓ Rhino		
		↓ Rhino - 600mm Trim		
		↓ Rhino - 760mm Trim		
		↓ Restriction of the Use of Hazardous Substances (Chinese)		
Power requirements				
Amperage	15 A			
Supply frequency	50 Hz			
Supply voltage	220 - 240 V			