


60cm Series 9 Contemporary Warming Drawer

Contemporary

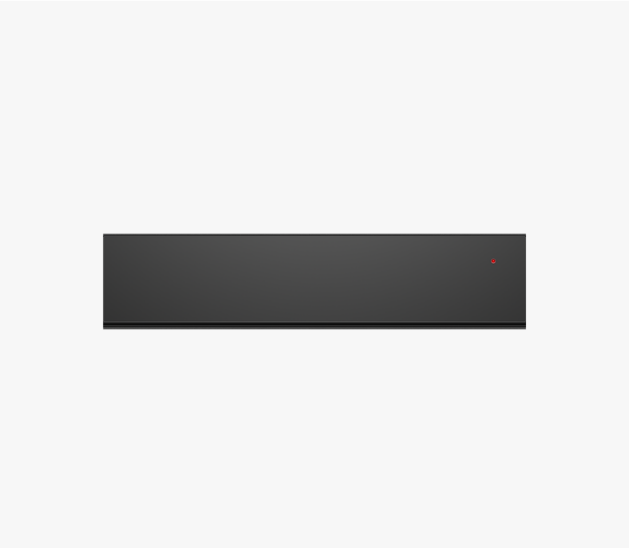


Serve meals hot and directly from a pre-heated plate thanks to our panel-ready, warming drawer.

- Integrates with surrounding cabinetry for a seamless look
- Space to keep six standard-sized place settings evenly warm
- Easy to clean smooth-glass base
- Six versatile tailored programmes for warming, proofing, dehydrating and slow cooking

DIMENSIONS

Height 140 mm

Width 596 mm
Depth 567 mm

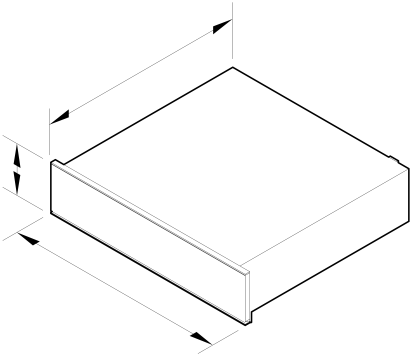

FEATURES & BENEFITS

- Complementary Design**
This Warming Drawer comes in a stylish black reflective glass finish, for seamless pairing with our Contemporary style ovens.
- Multi-Function Flexibility**
Choose from six tailored functions, including Rapid Proof for dough proofing and Dehydrate for drying foods like meat, fruit, and herbs. The Slow Cook function is ideal for finishing seared meats, casseroles, stews, and braises.
- Precise Control**
Our warming drawer delivers quick, even heating, ideal for keeping food warm and low-temperature cooking. You can also use it for resting roasted meat and proofing dough for bread or pizza bases.
- Added Convenience**

- With intuitive touch controls and a handle-free, push-to-open design, our warming drawer gives you the freedom to keep plates or cups warm while you continue to cook.
- Easy To Clean**
Cleaning and care of the warming drawer is easy. After each use, simply wipe out the smooth glass interior with a damp cloth.
- Safe And Sound**
With automatic switch-off and delayed start functionality, our warming drawers help keep dishes warm until it is time to serve the main meal.
- Sized To Suit**
With enough room to gently heat six place settings, 20 cappuccino cups or 42 espresso cups, our 60cm warming drawer is an ideal kitchen companion.
- ## SPECIFICATIONS
- | | |
|--------------------------|--------|
| Capacity | |
| Cappuccino cups | 20 |
| Espresso cups | 42 |
| Maximum allowable weight | 25 kg |
| Place settings | 6 |
| Usable depth | 408 mm |
| Usable height | 98 mm |
| Usable width | 535 mm |
- Cleaning**
- Easy clean smooth-glass base
- Controls**
- Audio feedback
 - Automatic pre-set temperatures

Automatic timers	30', 45', 1h, 2h, 4h, 6h	Adjustable front door panel to align with surrounding cabinetry	•	Where applicable:
Delayed start	•	Depth	567 mm	All appliances use energy, and energy usage typically generates carbon emissions. Fisher & Paykel Appliances' In-use Energy Carbon Emissions Estimate indicates carbon emissions from a product's in-use energy. This is calculated either annually or per cycle, using the product's market-specific energy label energy consumption data multiplied by the carbon emissions factor for energy in your country or region.
Electronic capacitive touch controls	•	Height	140 mm	
On/Off indicator	•	Width	596 mm	
Pre-set heating functions	•			
Push-to-open drawer	•			
Standby mode	•	Safety		
		Automatic turn off after 12 hours	•	Our In-use Energy Carbon Emissions Estimate is designed to assist customers in making informed purchasing decisions when comparing different Fisher & Paykel products. For example, a heat pump dryer typically has a lower In-use Energy Carbon Emissions Estimate than a vented dryer.
Functions		Full extension slides	•	
Cups	•			
Dehydrate	•	SKU	84254	
Number of functions	6			
Plates	•			
Rapid proof	•			
Slow cook	•	The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. © Fisher & Paykel Appliances Ltd 2020		
Warm	•			
Performance		Other product downloads available at fisherpaykel.com		
Heated glass base and fan	•	↓ DXF		
Low temperature cooking	•	↓ DWG		
Temperature levels	6	↓ Installation Guide (English)		
Temperature range	35°C-85°C	↓ Installation Guide (Chinese)		
		↓ Planning Guide (English)		
Power requirements		↓ Planning Guide - 60cm Ovens and Companions (Chinese)		
Amperage	10 A	↓ Revit		
Power cord length	1800 mm	↓ Rhino		
Supply frequency	50 Hz	↓ Restriction of the Use of Hazardous Substances (Chinese)		
Supply voltage	220-240 V	↓ SketchUp		
		↓ User Guide (English)		
		↓ User Guide (Chinese)		
Product dimensions				