

60cm Series 9 Contemporary Tall Warming Drawer

Series 9 | Contemporary

Brushed Silver Glass




With a timeless and expressive design this Warming Drawer keeps food and plates warm, with additional functions like Rapid Proof and Dehydrate.

- Push-to-open drawer with room for up to 16 standard-sized place settings
- Simple and intuitive touch controls for effortless operation
- Automatic switch-off and delayed start to keep dishes warm until it is time to serve
- Designed to match our Contemporary style appliances, for the ultimate kitchen solution

DIMENSIONS

Height	290 mm
Width	596 mm
Depth	567 mm

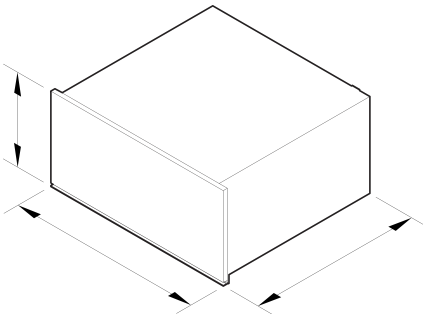

FEATURES & BENEFITS

MULTI-FUNCTION FLEXIBILITY

With space for up to 16 place settings or 20 cappuccino cups, our warming drawer is the ideal kitchen companion. Choose from six tailored functions, including Rapid Proof for dough, Dehydrate for drying foods, and Slow Cook for tender, flavorful meals.

PRECISE CONTROL

With gentle, even heating, our warming drawer is perfect for keeping dishes warm or gently cooking at low temperatures. Maintain the ideal serving temperature for every course, from delicate entrées to desserts, or use it to slowly develop rich, tender textures in your favourite recipes.

SAFE AND SOUND

With automatic switch-off and delayed start functionality, our warming drawers help keep dishes warm until you are ready to serve.

EASY TO CLEAN

Cleaning and care of the warming drawer is simple. After each use, just wipe out the smooth glass base with a damp cloth.

DESIGNED TO MATCH

Designed to complement our Contemporary style family of appliances, this Warming Drawer features a brushed silver finish with refined detailing. Able to be seamlessly built in almost anywhere, our companion products are crafted to align beautifully and install at the height that best suits your kitchen and lifestyle.

SPECIFICATIONS

Accessories (included)

Wire shelf	1
------------	---

Capacity

Cappuccino cups	20
Espresso cups	48
Place settings	16
Usable depth	398 mm
Usable height	224 mm
Usable width	430 mm

Cleaning

Easy clean smooth-glass base	•
------------------------------	---

Controls

Audio feedback	•	Supply frequency	50 Hz	↓	Planning Guide - 60cm Series 7 Contemporary (English)
Automatic pre-set temperatures	•	Supply voltage	220-240 V	↓	Rhino
Automatic timers	30', 45', 1h, 2h, 3h, 6h			↓	Safety & Warnings (English)
Delayed start	•			↓	Sketchup
Interface type	Touch button controls	Product dimensions			
On/Off indicator	•	Adjustable front door panel to align with surrounding cabinetry	•		Where applicable:
Pre-set heating functions	•	Depth	567 mm		All appliances use energy, and energy usage typically generates carbon emissions. Fisher & Paykel Appliances' In-use Energy Carbon Emissions Estimate indicates carbon emissions from a product's in-use energy. This is calculated either annually or per cycle, using the product's market-specific energy label energy consumption data multiplied by the carbon emissions factor for energy in your country or region.
Push-to-open drawer	•	Height	290 mm		
Standby mode	•	Width	596 mm		
Functions		Safety			
Cups	•	Automatic turn off after 12 hours	•		Our In-use Energy Carbon Emissions Estimate is designed to assist customers in making informed purchasing decisions when comparing different Fisher & Paykel products. For example, a heat pump dryer typically has a lower In-use Energy Carbon Emissions Estimate than a vented dryer.
Dehydrate	•	Full extension slides	•		
Number of functions	6				
Plates	•				
Rapid proof	•	SKU	85961		
Slow cook	•				
Warm	•				
Performance		The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. © Fisher & Paykel Appliances Ltd 2020			
Heated glass base and fan	•				
Low temperature cooking	•				
Temperature levels	6				
Temperature range	30°C-100°C	Other product downloads available at fisherpaykel.com			
Power requirements		↓	DWG		
Connection type	Flex cord	↓	DXF		
Dedicated circuit	10 A	↓	Care & Maintenance (English)		
Power cord length	1800 mm	↓	Care & Maintenance (English)		
Rated power	810 W	↓	First Use (English)		
		↓	Installation Considerations (English)		
		↓	Installation Guide (English)		
		↓	Planning Guide - 60cm Series 9 & 11 Contemporary (English)		



A PEACE OF MIND SALE
24 Hours 7 Days a Week Customer Support
T 1300 650 590 Wwww.fisherpaykel.com