


# DATA SHEET

# 24" DOUBLE DISHDRAWER™ TALL

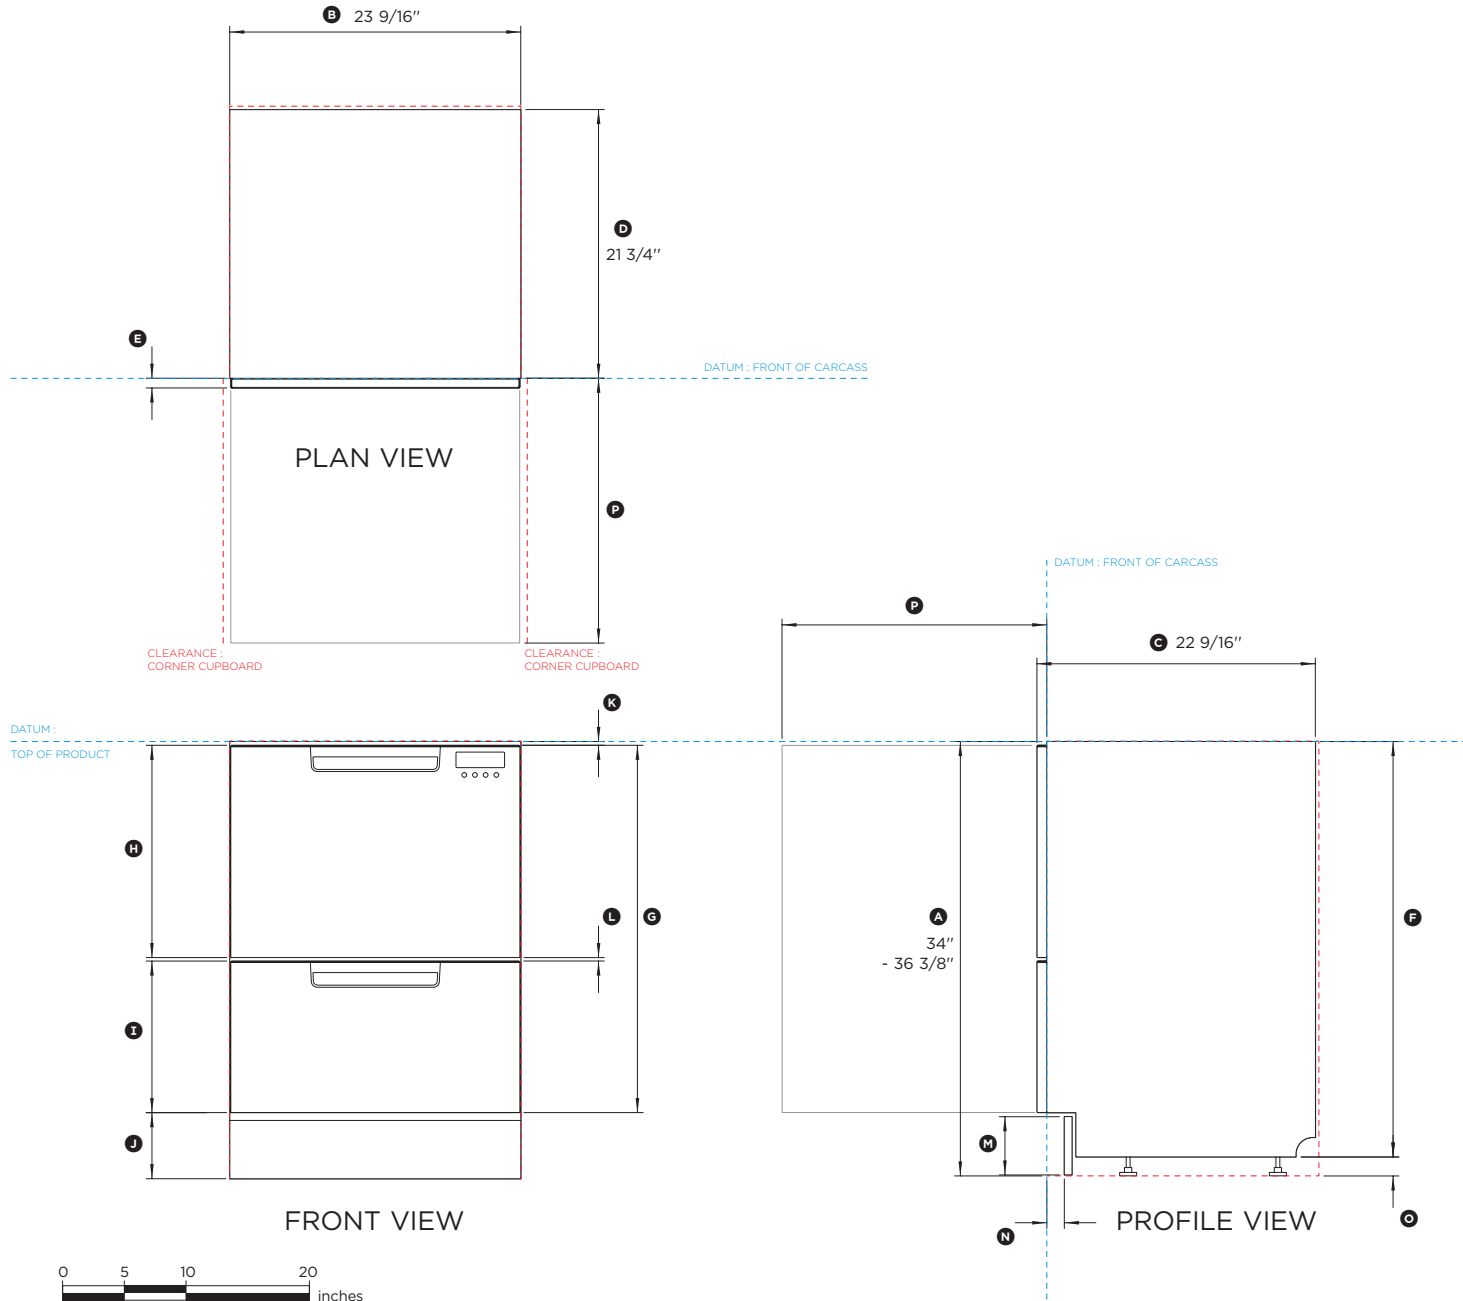

Model no:

**DD24DCTX9, DD24DCTX9**

(refer page 2 for metric measurements)

Dimensions	in
Ⓐ Overall height* of DishDrawer™	34" - 36 3/8"
Ⓑ Overall width of DishDrawer™	23 9/16"
Ⓒ Overall depth of DishDrawer™	22 9/16"
Ⓓ Depth of chassis	21 3/4"
Ⓔ Depth of front panel	13/16"
Ⓕ Height of chassis	33 11/16"
Ⓖ Height of drawer fronts	29 3/4"
Ⓗ Height of upper front panel	17 3/16"
Ⓘ Height of lower front panel	12 1/4"
Ⓚ Height from floor to bottom of lower front panel	3 15/16" - 6 5/16"
Ⓛ Height from top of front panel to top of chassis	5/16"
Ⓛ Ventilation gaps between panels	1/4"
Ⓜ Height of toekick panel	2 13/16" - 5"
Ⓝ Depth of toekick recess	1 1/2" - 4"
Ⓞ Height of adjustable levelling feet	3/8" - 2 11/16"
Ⓟ Maximum extension of drawer from front datum	21 9/16"

\* includes mounted feet

Minimum Clearances	in
Height of cavity	min 34"
Width of cavity	23 5/8"
Depth of cavity	min 22 1/16"
Minimum clearance from a corner cupboard	1/2"

Note: Service outlet at rear extends both sides, hoses and cords can be routed to either or both.


INDICATES CABINETY / PRODUCT DATUM -----  
INDICATES CABINETY CLEARANCES - - - - -

DATE: **07.09.2016**

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [www.fisherpaykel.com](http://www.fisherpaykel.com)

# DATA SHEET

# 24" DOUBLE DISHDRAWER™ TALL

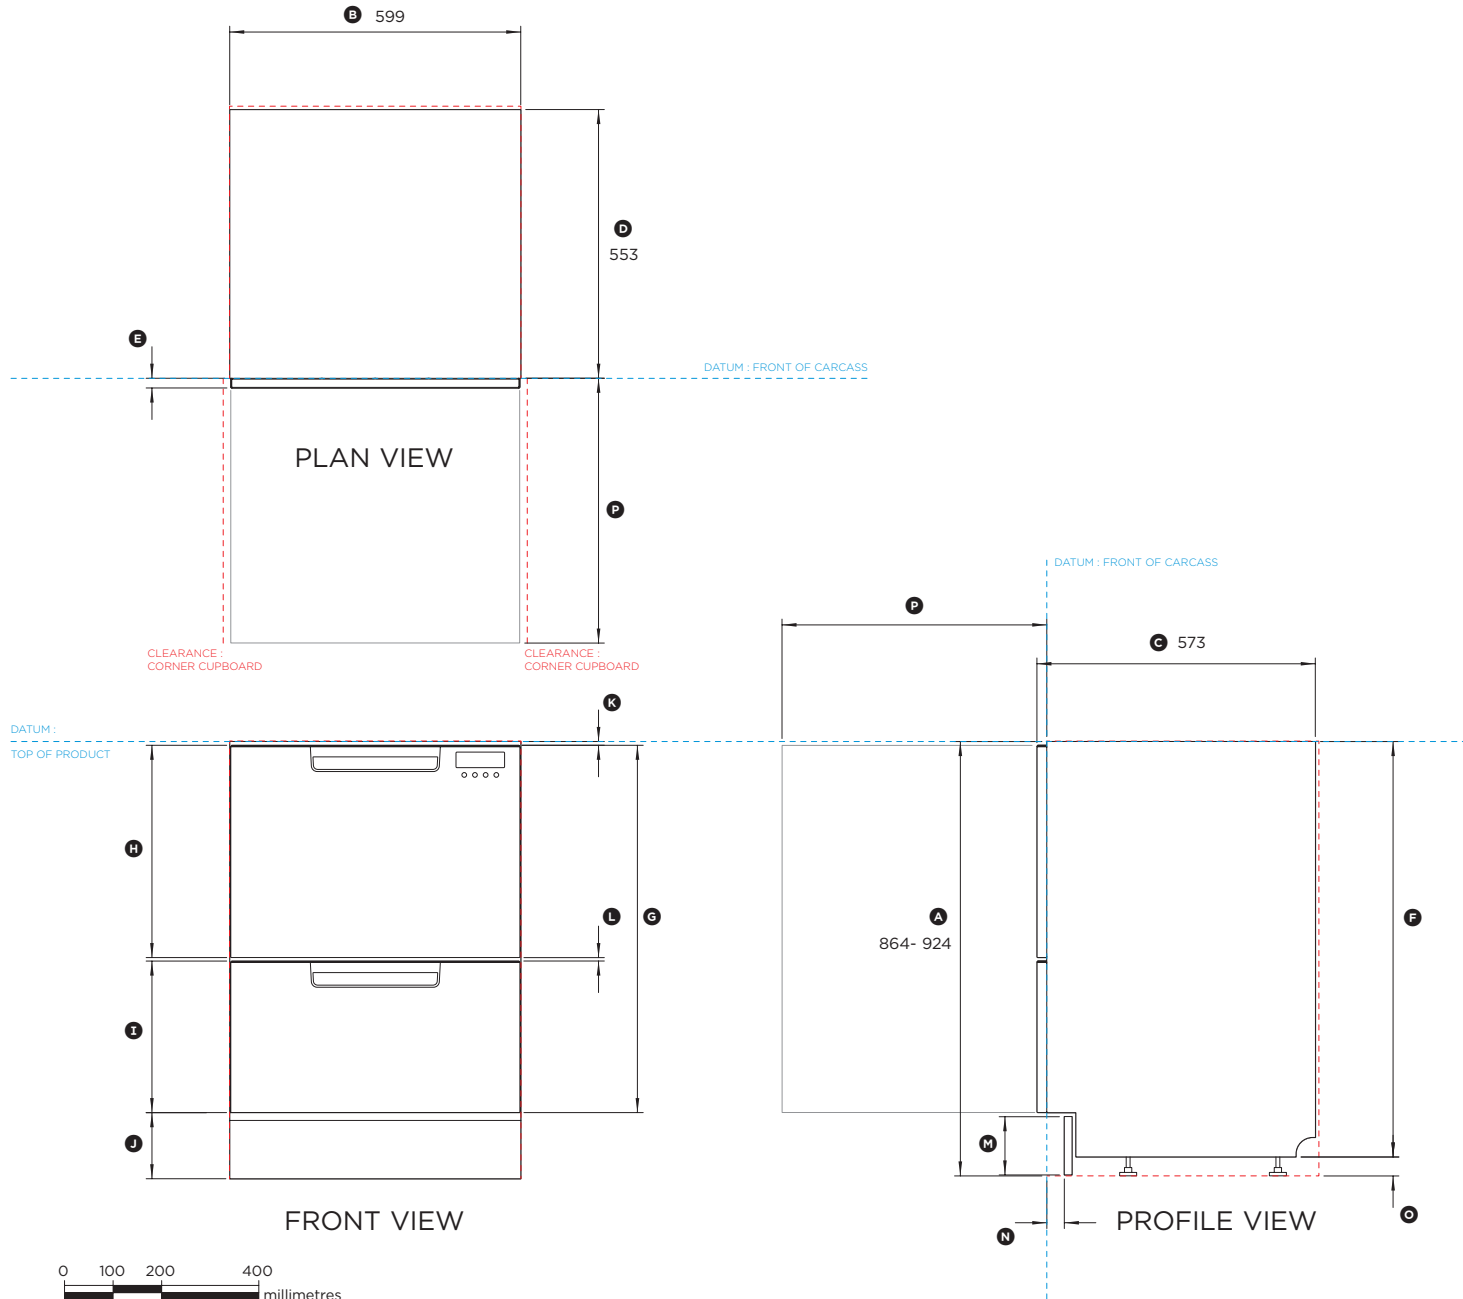

Model no:

**DD24DCTX9, DD24DCTX9**

(refer page 1 for imperial measurements)

Dimensions	mm
Ⓐ Overall height* of DishDrawer™	864 - 924
Ⓑ Overall width of DishDrawer™	599
Ⓒ Overall depth of DishDrawer™	573
Ⓓ Depth of chassis	553
Ⓔ Depth of front panel	20
Ⓕ Height of chassis	855
Ⓖ Height of drawer fronts	756
Ⓗ Height of upper front panel	437
Ⓘ Height of lower front panel	312
Ⓚ Height from floor to bottom of lower front panel	100 - 160
Ⓛ Height from top of front panel to top of chassis	8
Ⓜ Ventilation gaps between panels	7
Ⓝ Height of toekick panel	72 - 127
Ⓟ Depth of toekick recess	38 - 102
Ⓠ Height of adjustable levelling feet	9 - 69
Ⓡ Maximum extension of drawer from front datum	547

\* includes mounted feet

Minimum Clearances	mm
Height of cavity	min 864
Width of cavity	600
Depth of cavity	min 560
Minimum clearance from a corner cupboard	13

Note: Service outlet at rear extends both sides, hoses and cords can be routed to either or both.

INDICATES CABINETRY / PRODUCT DATUM -----  
 INDICATES CABINETRY CLEARANCES - - - - -

DATE: 07.09.2016

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit [www.fisherpaykel.com](http://www.fisherpaykel.com)