
## DATA SHEET

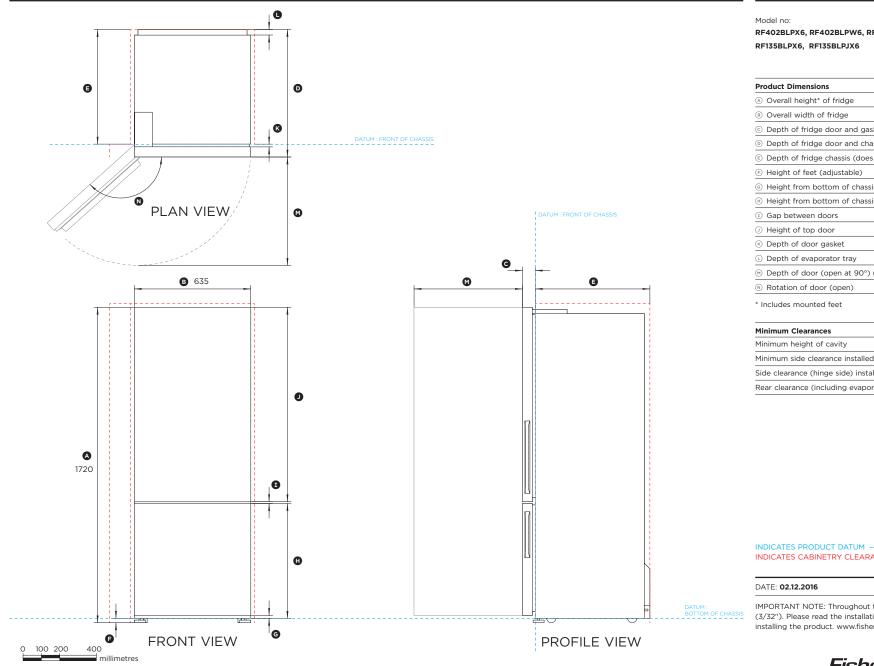

## 635MM ACTIVESMART™ FRIDGE

RF402BLPX6, RF402BLPW6, RF402BLYX6, RF402BLYW6,

Product Dimensions	mm
Overall height* of fridge	1720
Overall width of fridge	635
© Depth of fridge door and gasket	70
Depth of fridge door and chassis	695
© Depth of fridge chassis (does not include fridge door)	625
F Height of feet (adjustable)	24
G Height from bottom of chassis to bottom of bottom door	16
(ii) Height from bottom of chassis to top of bottom door	626
① Gap between doors	10
Height of top door	1060
© Depth of door gasket	15
© Depth of evaporator tray	30
Depth of door (open at 90°) (measured from front of door)	591
Rotation of door (open)	135°
* Includes mounted feet	

Minimum Clearances	mm
Minimum height of cavity	1740
Minimum side clearance installed flush with chassis	20
Side clearance (hinge side) installed flush with door - full rotation	135
Rear clearance (including evaporator tray)	30

INDICATES CABINETRY CLEARANCES ------

IMPORTANT NOTE: Throughout this guide, dimensions may vary by  $\pm 2mm$ (3/32"). Please read the installation manual for detailed information on installing the product. www.fisherpaykel.com

Fisher&Paykel