

60cm Series 9 Integrated Dual Zone Refrigerator

Integrated




Pair with the Integrated Dual Zone Freezer for the ultimate kitchen solution – this model features two independent food zones taking cooling flexibility to a new level.*

- Customise with your own kitchen cabinetry or purchase our stainless steel door panel accessory
- Flush fit design with 4mm gaps and custom height installation
- Two independent food zones with adjustable temperature from 1 to 6°C
- Easy-to-use touch-control panel and Wi-Fi capability

DIMENSIONS

Height	1870 mm
Width	592 mm
Depth	576 mm

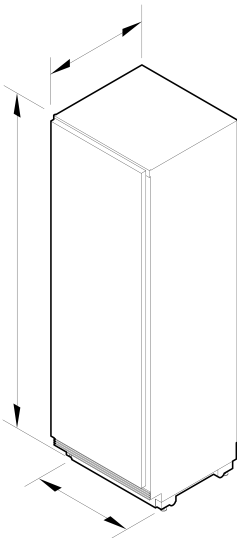

FEATURES & BENEFITS

Perfect Fit
These models fit flush, with only 4mm gaps around them and no visible hinges or grilles. Our Integrated models can be seamlessly hidden behind your cabinetry, or you can purchase our stainless steel door panel.

Independent Food Zones
When it comes to optimal food preservation, one temperature does not fit all. With two independent food zones, you can create the perfect climate for storing different foods. Each zone has adjustable temperature from 1°C to 6°C, ideal for items such as fruit and vegetables, dairy products, meats and leftovers.

Mix & Match

These modular refrigerators and freezers can be mixed and matched, with different sizes and finishes. Installed side by side or individually throughout the kitchen, you can create a cooling solution to suit your lifestyle. Customise with your own kitchen cabinetry and handles, or purchase our stainless steel door panel and handle options.

Clever Energy
ActiveSmart™ Foodcare learns how you live. It is technology that understands how you use your refrigerator and adjusts temperature, airflow and humidity inside to help keep food fresher for longer.

Flexible Storage
Designed to make it simple for you to store, access and remove food, this refrigerator includes LED-lit adjustable cantilevered shelving and full extension veggie bins.

Simple Installation
Our Integrated products are easy to install, whether you are renovating your kitchen or designing a new one. Adjustable front and rear feet allow for uneven floors alongside adjustable door panels that can be customised to match your kitchen. These models are designed to easily slide into place as separate units – a perfect fit for European design kitchens.

Ease Of Use
Using the intuitive touch-sensitive control panel, you can easily adjust the temperature to suit. Beautiful to use, the refrigerator door is family safe with a soft-close mechanism.

SPECIFICATIONS

Accessories (included)	
Hinge change (from right hinge to left hinge)	•

Accessories (sold separately)	
Door panel set stainless steel	Right & Left hinge RD6019
Handle kit Classic	AHCLRDSF

Handle kit Contemporary round, aluminium	AHSRDSF	Adjustable door shelves	4	Depth	576 mm
Handle kit Contemporary square fine, aluminium	AHD5RDSF	Adjustable glass cantilevered shelves	•	Height	1870 mm
Handle kit Contemporary square fine, black	AHD5RDSFB	Covered door shelves	1	Width	592 mm
Handle kit Contemporary square, aluminium	AHD7RDSFX	Door alarm	•		
Handle kit Minimal rectangular, black	AHM1RDSFB	LED ceiling lighting	•		
Handle kit Professional round flush	AHP3RDSF	Smart appliance	•		
Joiner Kit	AJRS19LR	SmartTouch control panel	•	SKU	26196
Toe kick stainless steel 1200mm	AKRS12010	Stackable bottle holders	2		
Toe kick stainless steel 1800mm	AKRS18010				
Toe kick stainless steel 600mm	AKRS06010				
Capacity		Installation Dimensions			
Total gross capacity	338 L	Minimum inside width of cabinetry frame	600 mm		
Volume	314 L	Minimum internal depth of cabinetry	600 mm		
Volume refrigerator	314 L	Minimum internal height of cabinetry	1880 mm		
Connected Features		Performance			
Alerts and notifications	•	ActiveSmart™ Foodcare	•	↓	DXF
Cyber security updates until	29 / 01 / 2028	Adaptive defrost	•	↓	DXF
Education and onboarding	•	Dual evaporator	•	↓	DXF
Remote operation	•	Frost free	•	↓	DXF
Software updates	•	Humidity control system	•	↓	Archicad
		Humidity controlled crisper bins	2	↓	DWG
		Inverter controlled compressor	•	↓	DWG
		Sabbath mode	•	↓	DWG
Consumption		Power requirements		↓	Energy Label
Energy rating	5 star	Rated current	10 A	↓	Energy Label
Energy usage	132kWh/year	Supply frequency	50 Hz	↓	Installation Guide - Assisted Opening Accessory - Integrated Refrigeration (English)
In-use energy carbon emissions estimate	80.5kgCO2e/year	Supply voltage	230 V	↓	Installation Guide (English)
Features		Product dimensions		↓	Planning Guide - Assisted Opening Accessory (English)
				↓	Planning Guide (English)
				↓	Revit
				↓	Rhino
				↓	Rhino - Custom Panel
				↓	Rhino - Door and Classic Round Handle
				↓	Rhino - Door and Contemporary Round Handle
				↓	Rhino - Door and Professional Round Flush Handle
				↓	Rhino - Door and Square Fine Black Handle

- [↓](#) Rhino - Door and Square Fine Handle
- [↓](#) SketchUp
- [↓](#) SketchUp - Custom Panel
- [↓](#) SketchUp - Door and Classic Round Handle
- [↓](#) SketchUp - Door and Contemporary Round Handle
- [↓](#) SketchUp - Door and Professional Round Flush Handle
- [↓](#) SketchUp - Door and Square Fine Black Handle
- [↓](#) SketchUp - Door and Square Fine Handle
- [↓](#) User Guide (English)
- [↓](#) Installation Video

Where applicable:

All appliances use energy, and energy usage typically generates carbon emissions. **Fisher & Paykel Appliances' In-use Energy Carbon Emissions Estimate** indicates carbon emissions from a product's in-use energy. This is calculated either annually or per cycle, using the product's market-specific energy label energy consumption data multiplied by the carbon emissions factor for energy in your country or region.

Our In-use Energy Carbon Emissions Estimate is designed to assist customers in making informed purchasing decisions when comparing different Fisher & Paykel products. For example, a heat pump dryer typically has a lower In-use Energy Carbon Emissions Estimate than a vented dryer.



A PEACE OF MIND SALE
24 Hours 7 Days a Week Customer Support
T 1300 650 590 Wwww.fisherpaykel.com