

60cm Series 9 Contemporary Tall Warming Drawer


Contemporary



- With a timeless and expressive design this Warming Drawer keeps food and plates warm, with additional functions like Rapid Proof and Dehydrate.
- Push-to-open drawer with room for up to 16 standard-sized place settings
 - Simple and intuitive touch controls for effortless operation
 - Automatic switch-off and delayed start to keep dishes warm until it is time to serve
 - Designed to match our Contemporary style appliances, for the ultimate kitchen solution

DIMENSIONS

Height	290 mm
Width	596 mm
Depth	567 mm

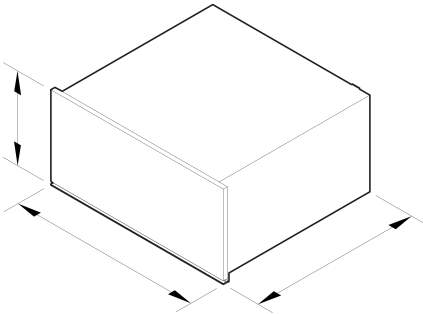

FEATURES & BENEFITS

MULTI-FUNCTION FLEXIBILITY

With space for up to 16 place settings or 20 cappuccino cups, our warming drawer is the ideal kitchen companion. Choose from six tailored functions, including Rapid Proof for dough, Dehydrate for drying foods, and Slow Cook for tender, flavorful meals.

PRECISE CONTROL

With gentle, even heating, our warming drawer is perfect for keeping dishes warm or gently cooking at low temperatures. Maintain the ideal serving temperature for every course, from delicate entrées to desserts, or use it to slowly develop rich, tender textures in your favourite recipes.

SAFE AND SOUND

With automatic switch-off and delayed start functionality, our warming drawers help keep dishes warm until you are ready to serve.	
EASY TO CLEAN	
Cleaning and care of the warming drawer is simple. After each use, just wipe out the smooth glass base with a damp cloth.	
DESIGNED TO MATCH	
Designed to complement our Contemporary style family of appliances, this Warming Drawer features a brushed silver finish with refined detailing. Able to be seamlessly built in almost anywhere, our companion products are crafted to align beautifully and install at the height that best suits your kitchen and lifestyle.	
SPECIFICATIONS	
Accessories (included)	
Wire shelf	1
Capacity	
Cappuccino cups	20
Espresso cups	48
Place settings	16
Usable depth	398 mm
Usable height	224 mm
Usable width	430 mm
Cleaning	
Easy clean smooth-glass base	•
Controls	
Audio feedback	•

Automatic pre-set temperatures		•	Supply voltage	220-240 V	↓	First Use (Hebrew)
Automatic timers	30', 45', 1h, 2h, 3h, 6h				↓	First Use (Italian)
					↓	First Use (Norwegian)
Delayed start		•			↓	First Use (Swedish)
Interface type	Touch button controls		Product dimensions		↓	Installation Considerations (Danish)
					↓	Installation Considerations (German)
On/Off indicator		•	Adjustable front door panel to align with surrounding cabinetry	•	↓	Installation Considerations (Dutch)
Pre-set heating functions		•	Depth	567 mm	↓	Installation Considerations (English)
Push-to-open drawer		•	Height	290 mm	↓	Installation Considerations (Finnish)
Standby mode		•	Width	596 mm	↓	Installation Considerations (French)
					↓	Installation Considerations (Hebrew)
					↓	Installation Considerations (Italian)
Functions			Safety		↓	Installation Considerations (Norwegian)
Cups		•	Automatic turn off after 12 hours	•	↓	Installation Considerations (Swedish)
Dehydrate		•	Full extension slides	•	↓	Installation Guide (Danish)
Number of functions	6				↓	Installation Guide (German)
Plates		•			↓	Installation Guide (Dutch)
Rapid proof		•			↓	Installation Guide (English)
Slow cook		•	SKU	85961	↓	Installation Guide (Finnish)
Warm		•			↓	Installation Guide (French)
					↓	Installation Guide (Hebrew)
					↓	Installation Guide (Italian)
			The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. © Fisher & Paykel Appliances Ltd 2020		↓	Installation Guide (Norwegian)
Performance					↓	Installation Guide (Swedish)
Heated glass base and fan		•			↓	Planning Guide - 60cm Series 9 Contemporary (Danish)
Low temperature cooking		•			↓	Planning Guide - 60cm Series 9 Contemporary (German)
Temperature levels	6				↓	Planning Guide - 60cm Series 9 Contemporary (Dutch)
Temperature range	30°C-100°C		Other product downloads available at fisherpaykel.com		↓	Planning Guide - 60cm Series 9 Contemporary (English)
					↓	Planning Guide - 60cm Series 9 Contemporary (Finnish)
					↓	Planning Guide - 60cm Series 9 Contemporary (French)
					↓	Planning Guide - 60cm Series 9 Contemporary (Hebrew)
					↓	Planning Guide - 60cm Series 9 Contemporary (Italian)
Power requirements					↓	Planning Guide - 60cm Series 9 Contemporary (Norwegian)
Connection type	Flex cord		↓	DWG	↓	Planning Guide - 60cm Series 9 Contemporary (Swedish)
Dedicated circuit	10 A		↓	DXF	↓	Rhino
Power cord length	1800 mm		↓	Declaration of Conformity (English)	↓	Safety & Warnings (Danish)
Rated power	810 W		↓	First Use (Danish)	↓	Safety & Warnings (Swedish)
Supply frequency	50 Hz		↓	First Use (German)	↓	Sketchup
			↓	First Use (Dutch)	↓	
			↓	First Use (English)	↓	
			↓	First Use (Finnish)	↓	
			↓	First Use (French)	↓	

Where applicable:

All appliances use energy, and energy usage typically generates carbon emissions. Fisher & Paykel Appliances' In-use Energy Carbon Emissions Estimate indicates carbon emissions from a product's in-use energy. This is calculated either annually or per cycle, using the product's market-specific energy label energy consumption data multiplied by the carbon emissions factor for energy in your country or region.

Our In-use Energy Carbon Emissions Estimate is designed to assist customers in making informed purchasing decisions when comparing different Fisher & Paykel products. For example, a heat pump dryer typically has a lower In-use Energy Carbon Emissions Estimate than a vented dryer.



A PEACE OF MIND SALE
24 Hours 7 Days a Week Customer Support
T 08000886605 W www.fisherpaykel.com