

60cm Series 9 Minimal Tall Warming Drawer


Minimal



- With a refined and minimal design this Warming Drawer keeps food and plates warm, with additional functions like Rapid Proof and Dehydrate.
- Push-to-open drawer with room for up to 16 standard-sized place settings
 - Simple and intuitive touch controls for effortless operation
 - Automatic switch-off and delayed start to keep dishes warm until it is time to serve
 - Designed to match our Minimal style appliances, for the ultimate kitchen solution

DIMENSIONS

Height	290 mm
Width	596 mm
Depth	567 mm

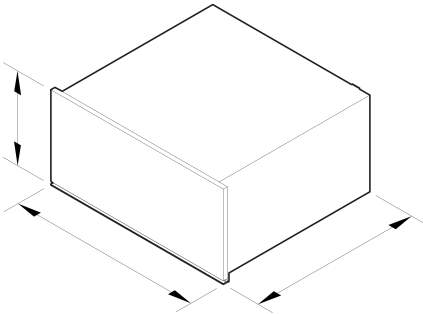

FEATURES & BENEFITS

- MULTI-FUNCTION FLEXIBILITY**
- With space for up to 16 place settings or 20 cappuccino cups, our warming drawer is the ideal kitchen companion. Choose from six tailored functions, including Rapid Proof for dough, Dehydrate for drying foods, and Slow Cook for tender, flavorful meals.
- PRECISE CONTROL**
- With gentle, even heating, our warming drawer is perfect for keeping dishes warm or gently cooking at low temperatures. Maintain the ideal serving temperature for every course, from delicate entrées to desserts, or use it to slowly develop rich, tender textures in your favourite recipes.
- SAFE AND SOUND**

With automatic switch-off and delayed start functionality, our warming drawers help keep dishes warm until you are ready to serve.

EASY TO CLEAN

Cleaning and care of the warming drawer is simple. After each use, just wipe out the smooth glass base with a damp cloth.

DESIGNED TO MATCH

Designed to complement our Minimal style family of appliances, this Warming Drawer features a black glass finish with refined detailing. Able to be seamlessly built in almost anywhere, our companion products are crafted to align beautifully and install at the height that best suits your kitchen and lifestyle.

SPECIFICATIONS

Accessories (included)	
Wire shelf	1

Capacity	
Cappuccino cups	20
Espresso cups	48
Place settings	16
Usable depth	398 mm
Usable height	224 mm
Usable width	430 mm

Cleaning	
Easy clean smooth-glass base	•

Controls	
Audio feedback	•
Automatic pre-set temperatures	•

Automatic timers	30', 45', 1h, 2h, 3h, 6h	Product dimensions		↓	First Use (Swedish)
Delayed start	•	Adjustable front door panel to align with surrounding cabinetry	•	↓	Installation Considerations (Danish)
Interface type	Touch button controls	Depth	567 mm	↓	Installation Considerations (German)
On/Off indicator	•	Height	290 mm	↓	Installation Considerations (Dutch)
Pre-set heating functions	•	Width	596 mm	↓	Installation Considerations (English)
Push-to-open drawer	•			↓	Installation Considerations (Finnish)
Standby mode	•			↓	Installation Considerations (French)
				↓	Installation Considerations (Hebrew)
				↓	Installation Considerations (Italian)
				↓	Installation Considerations (Norwegian)
				↓	Installation Considerations (Swedish)
Functions		Safety		↓	Installation Guide (Danish)
Cups	•	Automatic turn off after 12 hours	•	↓	Installation Guide (German)
Dehydrate	•	Full extension slides	•	↓	Installation Guide (Dutch)
Number of functions	6			↓	Installation Guide (English)
Plates	•	SKU	85959	↓	Installation Guide (Finnish)
Rapid proof	•			↓	Installation Guide (French)
Slow cook	•			↓	Installation Guide (Hebrew)
Warm	•			↓	Installation Guide (Italian)
				↓	Installation Guide (Norwegian)
				↓	Installation Guide (Swedish)
				↓	Planning Guide - 60cm Series 9 & 11 Minimal Handleless (Danish)
				↓	Planning Guide - 60cm Series 9 Minimal (Danish)
				↓	Planning Guide - 60cm Series 9 & 11 Minimal Handleless (German)
Performance		Other product downloads available at fisherpaykel.com		↓	Planning Guide - 60cm Series 9 Minimal (German)
Heated glass base and fan	•			↓	Planning Guide - 60cm Series 9 & 11 Minimal Handleless (Dutch)
Low temperature cooking	•			↓	Planning Guide - 60cm Series 9 Minimal (Dutch)
Temperature levels	6	↓ DWG		↓	Planning Guide - 60cm Series 9 & 11 Minimal Handleless (English)
Temperature range	30°C-100°C	↓ DXF		↓	Planning Guide - 60cm Series 9 & 11 Minimal (English)
		↓ Declaration of Conformity (English)		↓	Planning Guide - 60cm Series 9 & 11 Minimal Handleless (Finnish)
		↓ First Use (Danish)		↓	Planning Guide - 60cm Series 9 Minimal (Finnish)
Power requirements		↓ First Use (German)		↓	Planning Guide - 60cm Series 9 & 11 Minimal Handleless (French)
Connection type	Flex cord	↓ First Use (Dutch)		↓	Planning Guide - 60cm Series 9 Minimal (French)
Dedicated circuit	10 A	↓ First Use (English)		↓	Planning Guide - 60cm Series 9 & 11 Minimal Handleless (Hebrew)
Power cord length	1800 mm	↓ First Use (Finnish)		↓	Planning Guide - 60cm Series 9 Minimal (Hebrew)
Rated power	810 W	↓ First Use (French)		↓	Planning Guide - 60cm Series 9 & 11 Minimal Handleless (Italian)
Supply frequency	50 Hz	↓ First Use (Hebrew)		↓	Planning Guide - 60cm Series 9 Minimal (Italian)
Supply voltage	220-240 V	↓ First Use (Italian)		↓	
		↓ First Use (Norwegian)			

- ↓ Planning Guide - 60cm Series 9 & 11 Minimal Handleless (Norwegian)
- ↓ Planning Guide - 60cm Series 9 Minimal (Norwegian)
- ↓ Planning Guide - 60cm Series 9 & 11 Minimal Handleless (Swedish)
- ↓ Planning Guide - 60cm Series 9 Minimal (Swedish)
- ↓ Revit
- ↓ Rhino
- ↓ Safety & Warnings (Danish)
- ↓ Safety & Warnings (Swedish)
- ↓ Sketchup

Where applicable:

All appliances use energy, and energy usage typically generates carbon emissions. Fisher & Paykel Appliances' In-use Energy Carbon Emissions Estimate indicates carbon emissions from a product's in-use energy. This is calculated either annually or per cycle, using the product's market-specific energy label energy consumption data multiplied by the carbon emissions factor for energy in your country or region.

Our In-use Energy Carbon Emissions Estimate is designed to assist customers in making informed purchasing decisions when comparing different Fisher & Paykel products. For example, a heat pump dryer typically has a lower In-use Energy Carbon Emissions Estimate than a vented dryer.



A PEACE OF MIND SALE
24 Hours 7 Days a Week Customer Support
T 08000886605 Wwww.fisherpaykel.com