

36" Series 9 4 Burner Gas Rangetop, LPG


Professional



- A powerful six burner rangetop with professional styling and the additional cooking flexibility of a stainless steel griddle.
- Your burners can deliver anything from a high 19,000 BTU heat per burner for fast boiling, to a gentle flame for simmering
 - The stainless steel griddle is great for cooking anything from pancakes to bacon, grilled cheese to quesadillas

DIMENSIONS

Height	8 5/16 "
Width	35 7/8 "
Depth	28 "

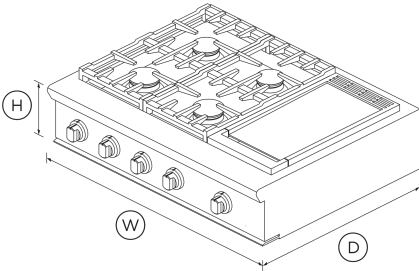

FEATURES & BENEFITS

- Perfect Heat**
Sealed Dual Flow Burners™ deliver rangetop power up to 23,500 BTU (NG models) for seriously fast boiling right down to a precise 140°F full surface simmer with the gentlest of flames.
- Precise Control**
From the highest to the lowest temperatures you get total control with halo-illuminated rangetop dials. A precise full surface simmer is delivered across all burners.
- Cooking Flexibility**
The continuous surface grates are designed for pots and pans to move safely across the rangetop. Heavyweight stainless steel griddles can be set to desired temperatures and then maintained evenly across the entire griddle surface.
- Easy Cleaning**
These rangetops have sealed burners and a single sheet cooking surface which, combined with a commercial-style stainless steel finish and dishwasher-safe grates, allow easy cleaning.

- Information At A Glance**
LED halo control dials provide information at a glance and assist in alerting you if any burners are accidentally left on.
- Complementary Design**
Built to last with distinctive, bold styling, this rangetop is designed to match the Fisher & Paykel Professional style family of appliances.

SPECIFICATIONS

Burner ratings	
Maximum burner power	Yes
Power back left	13,000 BTU
Power back right	13,000 BTU
Power front left	19,000 BTU
Power front right	15,000 BTU
Power griddle	15,000 BTU
Total cooktop power	75,000 BTU

Controls	
Metal illuminated dials	•

Gas Requirements	
Fitting and pipe	1/2" NPT, min. 1/2" flex line
Supply Pressure (LPG)	11" to 14" W.C

Performance	
Sealed cooking surface	•
Sealed Dual Flow Burners™	4
Simmer on all burners	140 °F

Power requirements	
Amperage	15 A
Supply frequency	60 Hz
Supply voltage	120 V

Product dimensions	
Depth	28 "
Height	8 5/16 "
Width	35 7/8 "

Recommended Back Guards Ventilation	
Combustible situation	BGCV2-3036H
Minimum CFM	600 BTU
Non combustible situation	BGCV2-3036 / BGCV2-1236
Pro hood	VS36 / VS1236
Traditional hood	ES36

SKU	71387
-----	-------

The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. © Fisher & Paykel Appliances Ltd 2020

Other product downloads available at fisherpaykel.com

- [↓](#) DXF
- [↓](#) DWG
- [↓](#) Installation Guide (English)

- [↓](#) Installation Guide (Canadian French)
- [↓](#) Planning Guide (English)
- [↓](#) Right To Repair Declaration (English, Canadian French)
- [↓](#) User Guide (English)
- [↓](#) User Guide (Canadian French)

Where applicable:

All appliances use energy, and energy usage typically generates carbon emissions. Fisher & Paykel Appliances' In-use Energy Carbon Emissions Estimate indicates carbon emissions from a product's in-use energy. This is calculated either annually or per cycle, using the product's market-specific energy label energy consumption data multiplied by the carbon emissions factor for energy in your country or region.

Our In-use Energy Carbon Emissions Estimate is designed to assist customers in making informed purchasing decisions when comparing different Fisher & Paykel products. For example, a heat pump dryer typically has a lower In-use Energy Carbon Emissions Estimate than a vented dryer.



A PEACE OF MIND SALE
24 Hours 7 Days a Week Customer Support
T 1.888.936.7872 W www.fisherpaykel.com