


60cm Series 9 Minimal Warming Drawer

Minimal

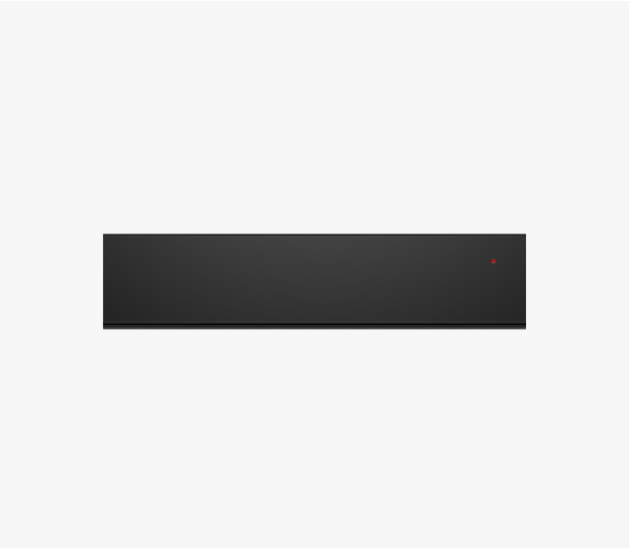


Serve meals hot and directly from a pre-heated plate thanks to our panel-ready, warming drawer.

- Integrates with surrounding cabinetry for a seamless look
- Space to keep six standard-sized place settings evenly warm
- Easy to clean smooth-glass base
- Six versatile tailored programmes for warming, proofing, dehydrating and slow cooking

DIMENSIONS

Height 140 mm

Width 596 mm
Depth 567 mm

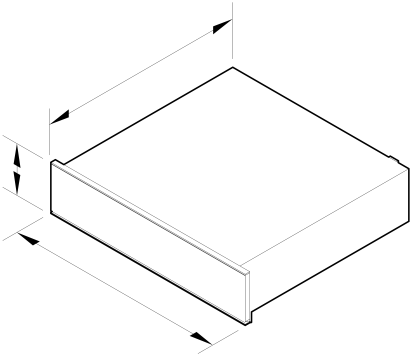

FEATURES & BENEFITS

Complementary design
Our Warming Drawer comes with the option of a stylish black glass panel or elegant grey glass panel, for seamless pairing with our Minimal or Contemporary style ovens.

Multi-function flexibility
Choose from six tailored functions including Rapid Proof for proofing dough, Dehydrate for drying foods such as meat, fruit and herbs and Slow Cook, ideal for finishing of seared meats, casseroles, stews and braises.

Precise control
With fast and even heating, our warming drawer is great for keeping food warm and low temperature cooking. You can even rest meat after a traditional roast in the oven and proof dough for bread making and pizza.

Added convenience
Handle-free, push-to-open with intuitive touch controls, our warming drawer gives you the freedom to keep plates or cups warm while you continue to cook.

Easy to clean
Cleaning and care of the warming drawer is simple. After each use, just wipe out the smooth glass interior with a damp cloth.

Safe and sound
With automatic switch-off and delayed start functionality, our warming drawers help keep dishes warm until it is time to serve the main meal.

Sized to suit
With enough room to gently heat six place settings, 20 cappuccino cups or 42 espresso cups, our 60cm warming drawer is an ideal kitchen companion.

SPECIFICATIONS

Capacity	
Cappuccino cups	20
Espresso cups	42
Maximum allowable weight	25 kg
Place settings	6
Usable depth	408 mm
Usable height	98 mm
Usable width	535 mm

Cleaning	
Easy clean smooth-glass base	•

Controls	
Audio feedback	•
Automatic pre-set temperatures	•

Automatic timers	30', 45', 1h, 2h, 4h, 6h	Adjustable front door panel to align with surrounding cabinetry	•
Delayed start	•	Depth	567 mm
Electronic capacitive touch controls	•	Height	140 mm
On/Off indicator	•	Width	596 mm
Pre-set heating functions	•		
Push-to-open drawer	•		
Standby mode	•		
Functions		Safety	
Cups	•	Automatic turn off after 12 hours	•
Dehydrate	•	Full extension slides	•
Number of functions	6	SKU	84225
Plates	•		
Rapid proof	•		
Slow cook	•		
Warm	•		
Performance		The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. © Fisher & Paykel Appliances Ltd 2020	
Heated glass base and fan	•	Other product downloads available at fisherpaykel.com	
Low temperature cooking	•		
Temperature levels	6	↓	DXF
Temperature range	35°C-85°C	↓	Declaration of Conformity (English)
Power requirements		↓	DWG
Amperage	10 A	↓	Installation Guide (Danish)
Power cord length	1800 mm	↓	Installation Guide (German)
Supply frequency	50 Hz	↓	Installation Guide (Dutch)
Supply voltage	220-240 V	↓	Installation Guide (English)
Product dimensions		↓	Installation Guide (Finnish)
		↓	Installation Guide (French)
		↓	Installation Guide (Hebrew)
		↓	Installation Guide (Italian)
		↓	Installation Guide (Norwegian)
		↓	Installation Guide (Swedish)
		↓	Planning Guide (German)

- ↓ Planning Guide (German)
- ↓ Planning Guide - 60cm Minimal Ovens and Companions (English)
- ↓ Planning Guide - Handleless Ovens and Companions (English)
- ↓ Revit
- ↓ Rhino
- ↓ SketchUp
- ↓ User Guide (Danish)
- ↓ User Guide (German)
- ↓ User Guide (Dutch)
- ↓ User Guide (English)
- ↓ User Guide (Finnish)
- ↓ User Guide (French)
- ↓ User Guide (Hebrew)
- ↓ User Guide (Italian)
- ↓ User Guide (Norwegian)
- ↓ User Guide (Swedish)

Where applicable:

All appliances use energy, and energy usage typically generates carbon emissions. Fisher & Paykel Appliances' In-use Energy Carbon Emissions Estimate indicates carbon emissions from a product's in-use energy. This is calculated either annually or per cycle, using the product's market-specific energy label energy consumption data multiplied by the carbon emissions factor for energy in your country or region.

Our In-use Energy Carbon Emissions Estimate is designed to assist customers in making informed purchasing decisions when comparing different Fisher & Paykel products. For example, a heat pump dryer typically has a lower In-use Energy Carbon Emissions Estimate than a vented dryer.



A PEACE OF MIND SALE
24 Hours 7 Days a Week Customer Support
T 08000886605 Wwww.fisherpaykel.com