


# 60cm Series 9 Integrated Warming Drawer

Integrated

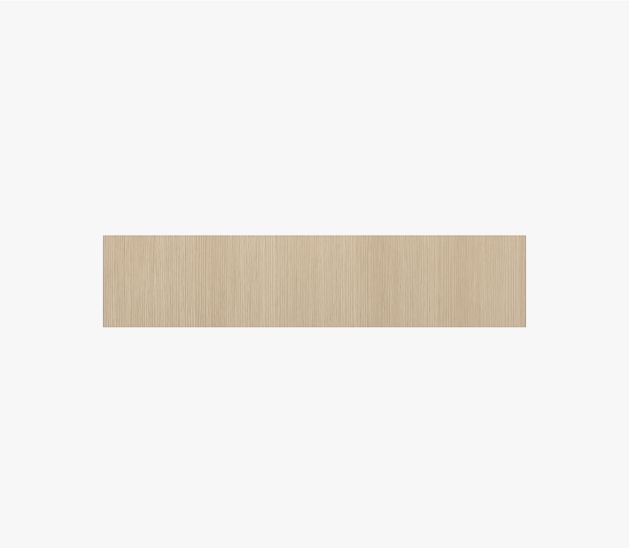


This panel-ready Warming Drawer keeps food and plates warm, with additional functions like Rapid Proof and Dehydrate.

- Push-to-open drawer with room for up to 6 standard-sized place settings
- Simple and intuitive touch controls for effortless operation
- Automatic switch-off and delayed start to keep dishes warm until it is time to serve
- Designed to integrate seamlessly with cabinetry, for the ultimate kitchen solution

## DIMENSIONS

|        |        |
|--------|--------|
| Height | 140 mm |
| Width  | 596 mm |
| Depth  | 566 mm |

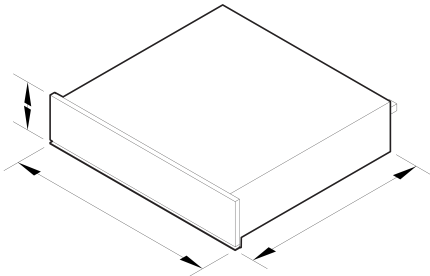

## FEATURES & BENEFITS

### MULTI-FUNCTION FLEXIBILITY

With space for up to 6 place settings or 20 cappuccino cups, our warming drawer is the ideal kitchen companion. Choose from six tailored functions, including Rapid Proof for dough, Dehydrate for drying foods, and Slow Cook for tender, flavorful meals.

### PRECISE CONTROL

With gentle, even heating, our warming drawer is perfect for keeping dishes warm or gently cooking at low temperatures. Maintain the ideal serving temperature for every course, from delicate entrées to desserts, or use it to slowly develop rich, tender textures in your favourite recipes.

### SAFE AND SOUND

With automatic switch-off and delayed start functionality, our warming drawers help keep dishes warm until you are ready to serve.

### EASY TO CLEAN

Cleaning and care of the warming drawer is simple. After each use, just wipe out the smooth glass base with a damp cloth.

### DESIGNED TO MATCH

Designed to blend seamlessly into any space, this Warming Drawer features a panel-ready finish. Able to be built in almost anywhere, our companion products are crafted to align beautifully and install at the height that best suits your kitchen and lifestyle.

### INSTALL ANYWHERE

This panel-ready Warming Drawer can be installed beyond the kitchen, perfect to create the luxury of warm towels in your bathroom or dressing area.

## SPECIFICATIONS

### Capacity

|                 |        |
|-----------------|--------|
| Cappuccino cups | 20     |
| Espresso cups   | 48     |
| Place settings  | 6      |
| Usable depth    | 398 mm |
| Usable height   | 86 mm  |
| Usable width    | 430 mm |

|                                |                          |
|--------------------------------|--------------------------|
| <b>Cleaning</b>                |                          |
| Easy clean smooth-glass base   | •                        |
| <hr/>                          |                          |
| <b>Controls</b>                |                          |
| Audio feedback                 | •                        |
| Automatic pre-set temperatures | •                        |
| Automatic timers               | 30', 45', 1h, 2h, 3h, 6h |
| Delayed start                  | •                        |
| Interface type                 | Touch button controls    |
| On/Off indicator               | •                        |
| Pre-set heating functions      | •                        |
| Push-to-open drawer            | •                        |
| Standby mode                   | •                        |
| <hr/>                          |                          |
| <b>Functions</b>               |                          |
| Cups                           | •                        |
| Dehydrate                      | •                        |
| Number of functions            | 6                        |
| Plates                         | •                        |
| Rapid proof                    | •                        |
| Slow cook                      | •                        |
| Warm                           | •                        |
| <hr/>                          |                          |
| <b>Performance</b>             |                          |
| Heated glass base and fan      | •                        |
| Low temperature cooking        | •                        |
| Temperature levels             | 6                        |

|                                                                                                                                                                                                                                                                                                                                                                                             |            |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| Temperature range                                                                                                                                                                                                                                                                                                                                                                           | 30°C-100°C |
| <hr/>                                                                                                                                                                                                                                                                                                                                                                                       |            |
| <b>Power requirements</b>                                                                                                                                                                                                                                                                                                                                                                   |            |
| Connection type                                                                                                                                                                                                                                                                                                                                                                             | Flex cord  |
| Power cord length                                                                                                                                                                                                                                                                                                                                                                           | 1800 mm    |
| Supply frequency                                                                                                                                                                                                                                                                                                                                                                            | 50 Hz      |
| <hr/>                                                                                                                                                                                                                                                                                                                                                                                       |            |
| <b>Product dimensions</b>                                                                                                                                                                                                                                                                                                                                                                   |            |
| Adjustable front door panel to align with surrounding cabinetry                                                                                                                                                                                                                                                                                                                             | •          |
| Depth                                                                                                                                                                                                                                                                                                                                                                                       | 566 mm     |
| Height                                                                                                                                                                                                                                                                                                                                                                                      | 140 mm     |
| Width                                                                                                                                                                                                                                                                                                                                                                                       | 596 mm     |
| <hr/>                                                                                                                                                                                                                                                                                                                                                                                       |            |
| <b>Safety</b>                                                                                                                                                                                                                                                                                                                                                                               |            |
| Automatic turn off after 12 hours                                                                                                                                                                                                                                                                                                                                                           | •          |
| Full extension slides                                                                                                                                                                                                                                                                                                                                                                       | •          |
| <hr/>                                                                                                                                                                                                                                                                                                                                                                                       |            |
| SKU                                                                                                                                                                                                                                                                                                                                                                                         | 85954      |
| <hr/>                                                                                                                                                                                                                                                                                                                                                                                       |            |
| The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. © Fisher & Paykel Appliances Ltd 2020 |            |
| <hr/>                                                                                                                                                                                                                                                                                                                                                                                       |            |
| Other product downloads available at <a href="https://fisherpaykel.com">fisherpaykel.com</a>                                                                                                                                                                                                                                                                                                |            |

- [↓](#) DWG
- [↓](#) DXF
- [↓](#) Care Guide (English)
- [↓](#) First Use (English)
- [↓](#) Installation Considerations (English)
- [↓](#) Planning Guide - 60cm Series 9 & 11 Contemporary (English)
- [↓](#) Planning Guide - 60cm Series 7 Contemporary (English)
- [↓](#) Planning Guide - 60cm Series 9 & 11 Minimal Handleless (English)
- [↓](#) Planning Guide - 60cm Series 9 & 11 Minimal (English)
- [↓](#) Planning Guide - 60cm Series 7 & 9 Minimal (English)
- [↓](#) Revit
- [↓](#) Rhino
- [↓](#) Sketchup

**Where applicable:**

All appliances use energy, and energy usage typically generates carbon emissions. **Fisher & Paykel Appliances' In-use Energy Carbon Emissions Estimate** indicates carbon emissions from a product's in-use energy. This is calculated either annually or per cycle, using the product's market-specific energy label energy consumption data multiplied by the carbon emissions factor for energy in your country or region.

Our In-use Energy Carbon Emissions Estimate is designed to assist customers in making informed purchasing decisions when comparing different Fisher & Paykel products. For example, a heat pump dryer typically has a lower In-use Energy Carbon Emissions Estimate than a vented dryer.



**A PEACE OF MIND SALE**  
**24 Hours 7 Days a Week Customer Support**  
T +65 6741 0777 W [www.fisherpaykel.com](https://www.fisherpaykel.com)