



PLAN VIEW

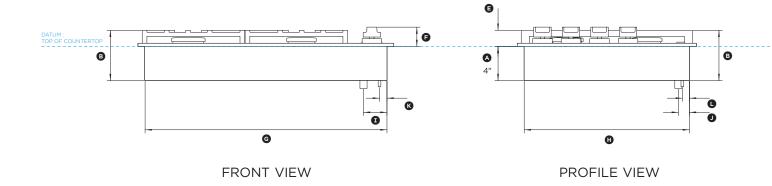



FISHER & PAYKEL

DATA SHEET 30" Professional Drop In Gas Cooktop

Model no:

CDV2-304

(refer page 3 for metric measurements)

Product Dimensions	in
Height of chassis (below top of counter)	4"
Overall height of product (bottom of chassis to top of grates)	5 15/16"
© Overall width of cooktop	30"
Overall depth of cooktop	21"
Height from countertop datum to top of cooking surface	1 15/16"
F Height from countertop datum to top of dials	2 1/4′
Width of chassis	28 3/8'
① Depth of chassis	19 3/8'
① Distance from right edge of chassis to center line of gas inlet	2 3/4"
① Distance from rear edge of chassis to center line of gas inlet	1 5/16"
Distance from right edge of chassis to center line of power cord	7/8"
Distance from rear edge of chassis to center line of power cord	13/16′

Cutout Dimensions	in
Overall width of cutout*	28 5/8"
Overall depth of cutout*	19 3/4"

^{*} Note cutout position is centred to the cooktop width and depth.


IMPORTANT NOTE: For full installation and clearance details please refer to our installation manual.

INDICATES PRODUCT DATUM -----INDICATES CUTOUT ------

DATE: **24.04.2018**

IMPORTANT: Throughout this guide, dimensions may vary by ±2mm (1/16"). Read the installation guide for detailed information on installing the product. For full installation instructions and specifications visit fisherpaykel.com

MINIMUM CLEARANCE: REAR VERTICAL COMBUSTIBLE SURFACE

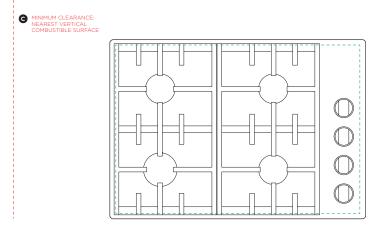

MINIMUM CLEARANCE: NEAREST VERTICAL COMBUSTIBLE SURFACE


MINIMUM CLEARANCE:
 COMBUSTIBLE SURFACE


MINIMUM CLEARANCE:
NON-COMBUSTIBLE SURFACE

F MAXIMUM OVERALL DEPTH OF OVERHEAD CABINETRY


B MINIMUM CLEARANCE: ADJACENT OVERHEAD CABINET

PLAN VIEW

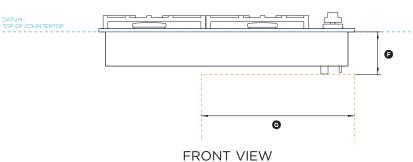



PROFILE VIEW



FISHER & PAYKEL

DATA SHEET 30" Professional Drop In Gas Cooktop

Model no:

CDV2-304

(refer page 4 for metric measurements)

Clearance Dimensions	in
Minimum width of ventilation hood installed above cooktop not shown*	30"
Minimum vertical distance between countertop and cabinet extending above counter	18"
Minimum clearance from left and right edge of cutout to nearest vertical combustible surface	12"
Minimum clearance from rear edge of cutout to nearest combustible surface	7"
Minimum clearance from cooking surface to: combustible surface centered above the cooking surface non-combustible surface centered above the cooking surface	36" 30"
Maximum overall depth of overhead cabinetry	13"

Specifications

Electrical		
Supply	120 VAC, 60Hz	
Service	15 amp circuit	
Gas - Natural		
Connection	1/2" NPT Minimum 5/8" dia. flex line	
Supply Pressure	Supply Pressure: 6" to 9" W.0	
Gas - LP		
Connection	1/2" NPT Minimum 5/8" dia. flex line	
Supply Pressure	11" to 14" W.C	


Location of Electrical and Gas Supply	in
© Distance from benchtop to electrical and gas supply area	5"
Width of electrical and gas supply area	18"

IMPORTANT NOTE: For full installation and clearance details please refer to our installation manual.


INDICATES PRODUCT DATUM
INDICATES CUTOUT
INDICATES CLEARANCES
INDICATES GAS AND ELCTRICAL SUPPLY AREA

DATE: 24.04.2018

IMPORTANT: Throughout this guide, dimensions may vary by ±2mm (1/16"). Read the installation guide for detailed information on installing the product. For full installation instructions and specifications visit fisherpaykel.com

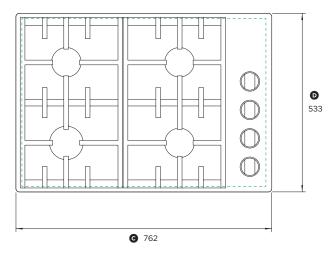

PLAN VIEW

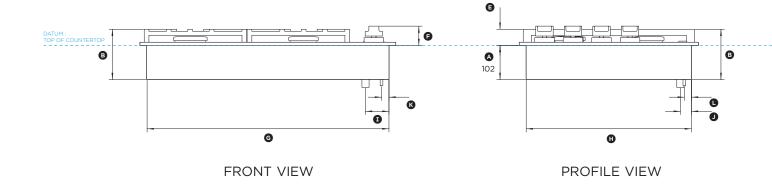



FISHER & PAYKEL

DATA SHEET 30" Professional Drop In Gas Cooktop

Model no:

CDV2-304

(refer page 1 for imperial measurements)

Product Dimensions	mm
Height of chassis (below top of counter)	102
Overall height of product (bottom of chassis to top of grates)	150
© Overall width of cooktop	762
Overall depth of cooktop	533
Height from countertop datum to top of cooking surface	49
Height from countertop datum to top of dials	58
Width of chassis	721
(H) Depth of chassis	492
① Distance from right edge of chassis to centre line of gas inlet	70
① Distance from rear edge of chassis to centre line of gas inlet	33
© Distance from right edge of chassis to centre line of power cord	22
Distance from rear edge of chassis to centre line of power cord	21

Cutout Dimensions	mm
Overall width of cutout *	727
Overall depth of cutout *	502

^{*} Note cutout position is centred to the cooktop width and depth.


IMPORTANT NOTE: For full installation and clearance details please refer to our installation manual.

INDICATES PRODUCT DATUM -----INDICATES CUTOUT ------


DATE: **24.04.2018**

IMPORTANT: Throughout this guide, dimensions may vary by $\pm 2mm$ (1/16"). Read the installation guide for detailed information on installing the product. For full installation instructions and specifications visit fisherpaykel.com

MINIMUM CLEARANCE: REAR VERTICAL COMBUSTIBLE SURFACE

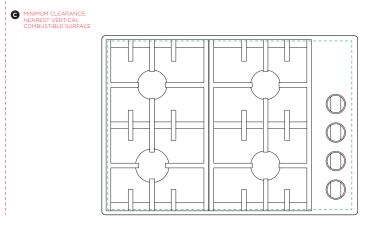

PLAN VIEW

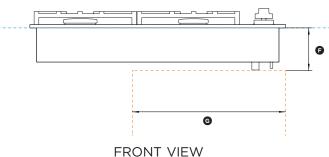

W PROFILE VIEW

MINIMUM CLEARANCE: NEAREST VERTICAL COMBUSTIBLE SURFACE

> E MINIMUM CLEARANCE: COMBUSTIBLE SURFACE

MINIMUM CLEARANCE: NON-COMBUSTIBLE SURFACE

> MAXIMUM OVERALL DEPTH OF OVERHEAD CABINETRY

B MINIMUM CLEARANCE: ADJACENT OVERHEAD CABINET



DATUM: TOP OF COUNTERTOP

FISHER & PAYKEL

DATA SHEET 30" Professional Drop In Gas Cooktop

Model no:

CDV2-304

(refer page 2 for imperial measurements)

Clearance Dimensions	mm
Minimum width of ventilation hood installed above cooktop not shown*	762
Minimum vertical distance between countertop and cabinet extending above counter	457
Minimum clearance from left and right edge of cutout to nearest vertical combustible surface	305
Minimum clearance from rear edge of cutout to neares combustible surface	178
Minimum clearance from cooking surface to: combustible surface centered above the cooking surface non-combustible surface centered above the cooking surface	915
Maximum overall depth of overhead cabinetry	330

Specifications

Electrical		
Supply	120 VAC, 60Hz	
Service	15 amp circuit	
Gas - Natural		
Connection	1/2" NPT Minimum 5/8" dia. flex line	
Supply Pressure	Supply Pressure: 6" to 9" W.C	
Gas - LP		
Connection	1/2" NPT Minimum 5/8" dia. flex line	
Supply Pressure	11" to 14" W.C	

Location of Electrical and Gas Supply	mm
F Distance from benchtop to electrical and gas supply area	127
© Width of electrical and gas supply area	457

IMPORTANT NOTE: For full installation and clearance details please refer to our installation manual.

INDICATES	PRODUCT DATUM		
INDICATES	CUTOUT		
INDICATES	CLEARANCES		
INDICATES	GAS AND ELCTRIC	AL SUPPLY AREA	

DATE: 24.04.2018

IMPORTANT: Throughout this guide, dimensions may vary by ±2mm (1/16"). Read the installation guide for detailed information on installing the product. For full installation instructions and specifications visit fisherpaykel.com