

24" Series 9 Minimal Warming Drawer

Minimal




With a refined and minimal design this Warming Drawer keeps food and plates warm, with additional functions like Rapid Proof and Dehydrate.

- Push-to-open drawer with room for up to 6 standard-sized place settings
- Simple and intuitive touch controls for effortless operation
- Automatic switch-off and delayed start to keep dishes warm until it is time to serve
- Designed to match our Minimal style appliances, for the ultimate kitchen solution

DIMENSIONS

Height	5 1/2 "
Width	23 7/16 "
Depth	22 5/16 "

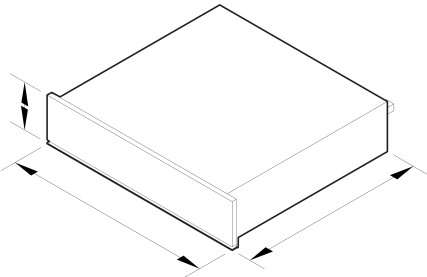

FEATURES & BENEFITS

MULTI-FUNCTION FLEXIBILITY

With space for up to 6 place settings or 20 cappuccino cups, our warming drawer is the ideal kitchen companion. Choose from six tailored functions, including Rapid Proof for dough, Dehydrate for drying foods, and Slow Cook for tender, flavorful meals.

PRECISE CONTROL

With gentle, even heating, our warming drawer is perfect for keeping dishes warm or gently cooking at low temperatures. Maintain the ideal serving temperature for every course, from delicate entrées to desserts, or use it to slowly develop rich, tender textures in your favorite recipes.

SAFE AND SOUND

With automatic switch-off and delayed start functionality, our warming drawers help keep dishes warm until you are ready to serve.

EASY TO CLEAN

Cleaning and care of the warming drawer is simple. After each use, just wipe out the smooth glass base with a damp cloth.

DESIGNED TO MATCH

Designed to complement our Minimal style family of appliances, this Warming Drawer features a black glass finish with refined detailing. Able to be seamlessly built in almost anywhere, our companion products are crafted to align beautifully and install at the height that best suits your kitchen and lifestyle.

SPECIFICATIONS

Capacity	
Cappuccino cups	20
Espresso cups	48
Place settings	6
Usable depth	15 11/16 "
Usable height	3 3/8 "
Usable width	16 15/16 "

Cleaning

- Easy clean smooth-glass base

Controls

- Audio feedback
- Automatic pre-set temperatures
- Automatic timers30', 45', 1h, 2h, 3h, 6h
- Delayed start
- Interface typeTouch button controls

On/Off indicator	•	Depth	22 5/16 "	↓	Planning Guide - 24" Series 9 & 11 Minimal (English)
Pre-set heating functions	•	Height	5 1/2 "	↓	Planning Guide - 24" Series 7 & 9 Minimal (English)
Push-to-open drawer	•	Width	23 7/16 "	↓	Planning Guide - 24" Series 9 & 11 Minimal Handleless (Canadian French)
Standby mode	•			↓	Planning Guide - 24" Series 9 & 11 Minimal (Canadian French)
				↓	Planning Guide - 24" Series 7 & 9 Minimal (Canadian French)
				↓	Planning Guide - 24" Series 9 & 11 Minimal Handleless (Spanish)
				↓	Planning Guide - 24" Series 9 & 11 Minimal (Spanish)
				↓	Planning Guide - 24" Series 7 & 9 Minimal (Spanish)
				↓	Revit
				↓	Rhino
				↓	Sketchup
Functions		Safety			
Cups	•	Automatic turn off after 12 hours	•		
Dehydrate	•	Full extension slides	•		
Number of functions	6				
Plates	•				
Rapid proof	•	SKU	85968		
Slow cook	•				
Warm	•				
		The product dimensions and specifications in this page apply to the specific product and model. Under our policy of continuous improvement, these dimensions and specifications may change at any time. You should therefore check with Fisher & Paykel's Customer Care Centre to ensure this page correctly describes the model currently available. © Fisher & Paykel Appliances Ltd 2020			
Performance		Other product downloads available at fisherpaykel.com			
Heated glass base and fan	•	↓ DWG			
Low temperature cooking	•	↓ DXF			
Temperature levels	6	↓ Care & Maintenance (English)			
Temperature range	86°F-212°F	↓ Care & Maintenance (Canadian French)			
		↓ Care & Maintenance (Spanish)			
		↓ First Use (English)			
		↓ First Use (Canadian French)			
		↓ First Use (Spanish)			
		↓ Installation Considerations (English)			
		↓ Installation Considerations (Canadian French)			
		↓ Installation Considerations (Spanish)			
		↓ Installation Guide (English)			
		↓ Installation Guide (Canadian French)			
		↓ Installation Guide (Spanish)			
		↓ Planning Guide - 24" Series 9 & 11 Minimal Handleless (English)			
Power Requirements					
Connection type	Flex cord				
Dedicated circuit	15 A				
Rated power	930 W				
Supply frequency	60 Hz				
Supply voltage	120 V				
Product Dimensions					
Adjustable front door panel to align with surrounding cabinetry	•				

Where applicable:

All appliances use energy, and energy usage typically generates carbon emissions. Fisher & Paykel Appliances' In-use Energy Carbon Emissions Estimate indicates carbon emissions from a product's in-use energy. This is calculated either annually or per cycle, using the product's market-specific energy label energy consumption data multiplied by the carbon emissions factor for energy in your country or region.

Our In-use Energy Carbon Emissions Estimate is designed to assist customers in making informed purchasing decisions when comparing different Fisher & Paykel products. For example, a heat pump dryer typically has a lower In-use Energy Carbon Emissions Estimate than a vented dryer.



A PEACE OF MIND SALE
24 Hours 7 Days a Week Customer Support
T 1.888.936.7872 [Wwww.fisherpaykel.com](#)