
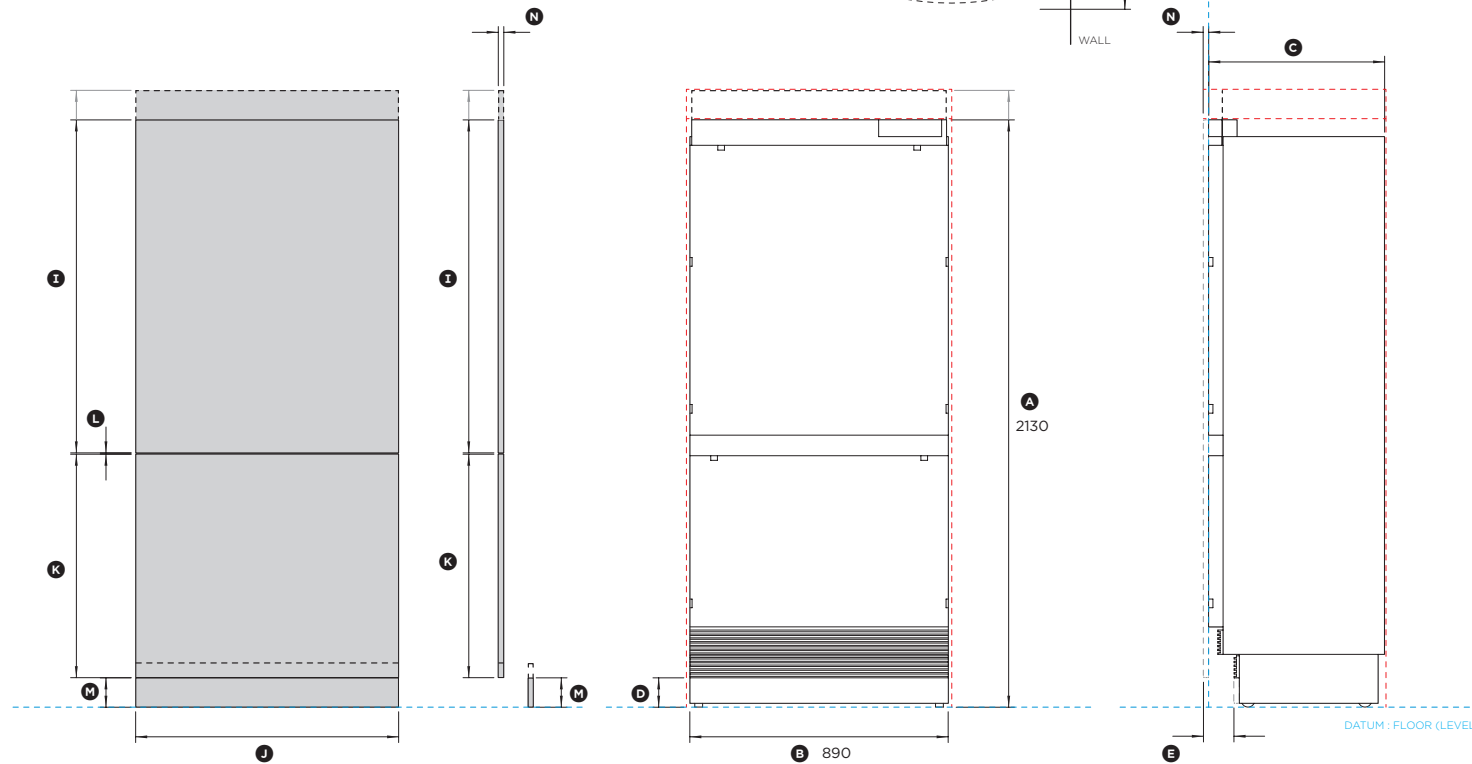


FISHER & PAYKEL

DATA SHEET 914mm ActiveSmart Built-In Fridge

0 100 200 400
millimetres

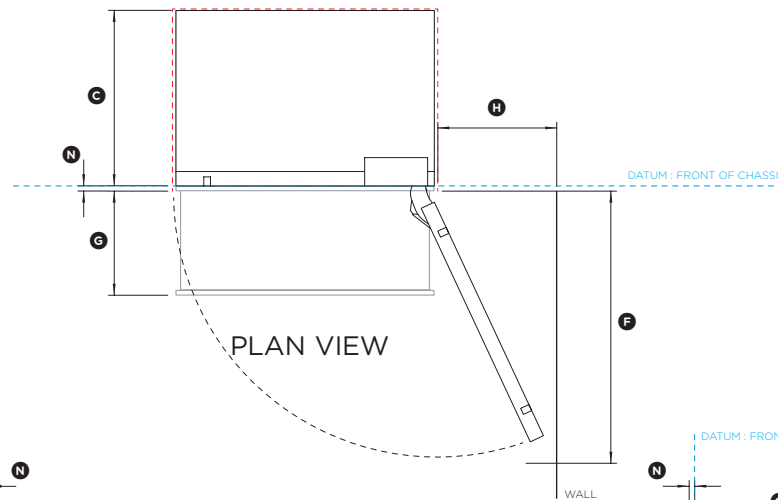

CUSTOM PANELS

FRONT VIEW

PROFILE VIEW

Model no:

RS9120WRJ1, RS9120WLJ1

Note: Left hand hinge model is a mirrored version of image shown.

| Product Dimensions | mm |
|--|-------------|
| Ⓐ Overall height of fridge* | 2028 / 2130 |
| Ⓑ Overall width of fridge | 890 |
| Ⓒ Overall depth of fridge (excl. front door panels) | 606 |
| Ⓓ Height from bottom datum to top of toe kick | 102 - 152 |
| Ⓔ Depth of toe kick (19mm panels shown)** | 71 - 101 |
| Ⓕ Depth of door (widest opening) measured from front of cabinetry | 940 |
| Ⓖ Depth of drawer (open) measured from front of cabinetry** | 360 |
| Ⓖ Minimum door clearance*** to adjacent wall (115° - full internal access)** | 410 |

* Removable top trim allows installation into 2032mm or 2134mm H cavity.

** Door panels to be manufactured & fitted by cabinetmaker, thickness min 16mm - max 25mm.

*** Measured from front cabinetry edge.

| Custom Panel Dimensions | mm |
|--|------------------|
| Ⓘ Height of top door panel | 1150/ 1252 |
| Ⓛ Width of door panels | 906 |
| Ⓚ Height of bottom drawer panel | 722 - 772 |
| Ⓛ Gap between top door panel and bottom drawer panel | 4 |
| Ⓚ Height of custom toe kick panel* | 102 - 152 |
| Ⓚ Depth of custom panels | min 16 max 25 |
| Maximum weight of top door panel (including handle**) | 20kg |
| Maximum weight of bottom drawer panel (including handle**) | 11kg |

* 102mm tall stainless steel toe kick panel supplied. The bottom grille can be reduced to allow for a higher toe kick. Adjust the height of the bottom drawer panel accordingly.

** Door handle kit is available as an optional accessory.

| Clearance Dimensions | mm |
|--|-------------|
| Minimum cabinetry gap from edge of custom panels | 4 |
| Overall height of cavity | 2032 / 2134 |
| Overall width of cavity | 914 |
| Overall minimum depth of cavity | 635 |

INDICATES CABINERY / PRODUCT DATUM -----
INDICATES CABINERY CLEARANCES - - - - -

DATE: 12.08.2017

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com