


FISHER & PAYKEL

SPECIFICATION GUIDE

INDUCTION COOKTOP, 83CM WITH INTEGRATED VENTILATION

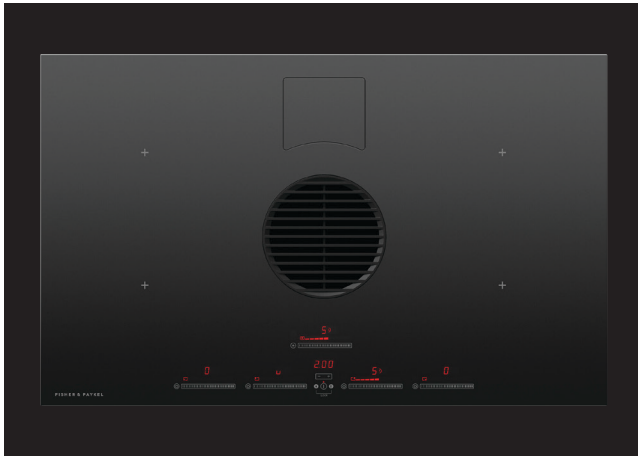

OVERVIEW

Our new 83cm induction cooktop offers an intelligent solution to cooking and kitchen ventilation in one singular appliance. With a sleek black glass finish, it can be installed in a variety of kitchen layouts – perfect for island benches or homes with high or slanted ceilings. With nine fan speeds plus boost, it offers powerful extraction and four induction cooking zones, including SmartZone.

MODELS

Induction Cooktop with Integrated Ventilation, Recirculation
CID834RDTB4

Induction Cooktop with Integrated Ventilation, Duct Out
CID834DTB4

SERIES & STYLE

Series 9
Minimal

SUPPLIED DUCTING

CID834DTB4 models

2x 90° vertical elbows, 4x 15° bends, 1x 500mm straight ducting (222 x 89)

CID834RDTB4 models

1x recirculation filter housing, 1x 500mm straight ducting (222 x 89), 1x 300mm straight ducting (218 x 55), 1x 90° transition elbow (222 x 89 – 218 x 55), 1x recirculation outlet

FEATURES

- ① Seamlessly integrated cooktop extraction, perfect for islands or homes with high or slanted ceilings
- ② Designed to fit raised or flush with the countertop with a sleek black glass finish
- ③ Nine fan speeds plus boost, for effective extraction of cooking vapours
- ④ Four cooking zones, including simple bridging of two zones to create a SmartZone
- ⑤ Immediate heat response and precision temperature control with induction technology
- ⑥ Easy-to-clean single glass surface, with grease filter tray for capturing spills
- ⑦ A flush ventilation grille allows pots to slide across an area of the cooktop surface
- ⑧ Simple to install, with ducted and recirculation systems available
- ⑨ Cooktop remains cool to touch until a pot or pan is placed on the surface
- ⑩ Intuitive Touch&Slide controls react immediately when temperature is adjusted

FISHER & PAYKEL

SPECIFICATION GUIDE


INDUCTION COOKTOP, 83CM WITH INTEGRATED VENTILATION, RECIRCULATION

PRODUCT SPECIFICATIONS

Model No.	CID834RDTB4
Dimensions	H 217mm W 830mm D 515mm
Weight	38kg
Electrical	
Supply	220V - 240V 50Hz/60Hz
Maximum rated power	7.4 kW
Connection	Terminal block
Accessory kits*	
D1-C-218-55	Ducting and connector
E90-218-55	90° horizontal elbow

*Product can be vented to the front or rear using supplied components. Accessory kits can be purchased separately to expand venting directions and options.

ACCESSORY DIMENSIONS

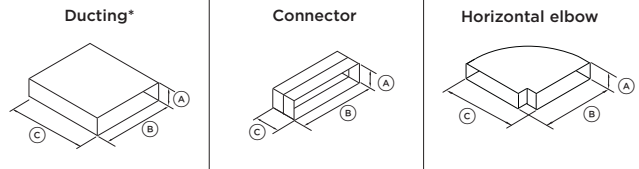


	Ducting	Connector	Horizontal elbow
	mm	mm	mm
(A) Height	55	58	58
(B) Width	218	222	256
(C) Depth	1000	70	256

Overall part dimensions detailed

*Reduced length illustrated

PRODUCT DIMENSIONS

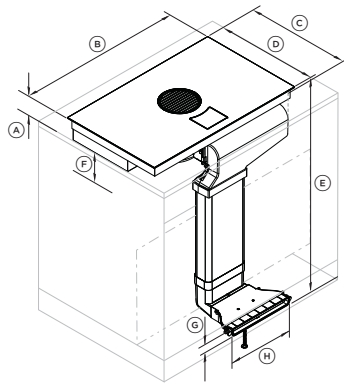

REAR ISO VIEW


	mm
(A) Overall height of cooktop	217
(B) Overall width of cooktop	830
(C) Overall depth of cooktop*	534
(D) Depth of cooktop surface	515
(E) Height of ducting**	500-899
(F) Minimum clearance from base of product***	200
(G) Height of venting outlet	37
(H) Width of venting outlet	340

*Including filter box at rear.

**From underside of glass to base of ducting. Using supplied ducting.

****For removal of bottom shelf for cleaning.

CUTOUT DIMENSIONS: STANDARD INSTALLATION

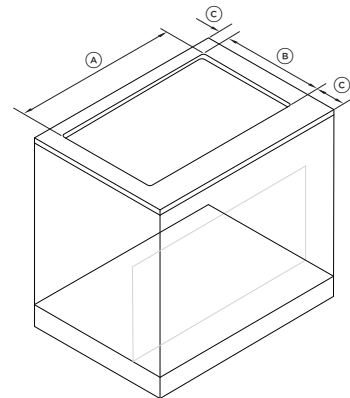

REAR ISO VIEW

	mm
(A) Overall width of cutout	807
(B) Overall depth of cutout	492
(C) Minimum depth at front and rear of cutout	50
Not illustrated: Terminal block location from right edge of chassis*	180
Not illustrated: Terminal block location from rear edge of chassis*	115

*When cooktop is installed in cutout

Cutout position is centered to the cooktop