

SAFETY & WARNINGS

WARNING!

Cut Hazard
Failure to use caution could result in injury.
• Take care: some edges may be sharp.



- For products that are not front-mounted, installation must be carried out by a Fisher & Paykel trained and supported service technician.
- Ensure all packaging is removed and disposed of responsibly.
- Installation of this product requires basic mechanical skills.
- Ensure product is installed with the correct tools to avoid personal injury or damage to the appliance.
- Take care not to scratch the door with the supplied Hex key when tightening the screws.

COMPONENTS REQUIRED

Supplied



Handle (1)



M6x25mm pan head screw (2)



M6x25mm countersunk screw (2)



5mm hex key (1)

Not supplied



Powered driver



Crosshead driver



Tape measure



Level

FITTING HANDLE TO PANEL

①




Custom panel installations:
Mark the handle location on the panel. Ensure distance between holes is 432mm.

②




Custom panel installations:
Drill the holes using a 7mm drill bit. Counterbore from the rear.

③

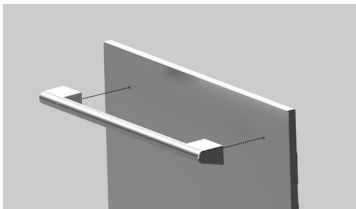

Align handle to the holes.

④

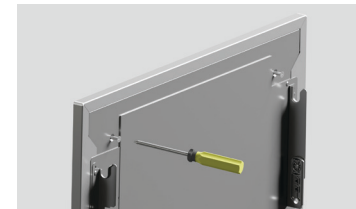

Secure handle by loosely tightening the screws using a crosshead driver. Do not overtighten.

Custom and Dishwasher panels:
Countersunk screw
DishDrawer panels:
Pan head screw

⑤



Use a level to confirm the handle is aligned. Tighten using the supplied hex key.