


36 INCH ELECTRIC CERAMIC COOKTOP DIMENSIONS

CE365DBX1

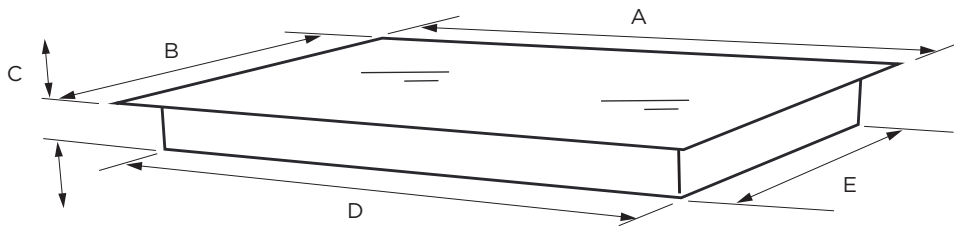

DIMENSIONS INCHES (MM)

		CE365DBX1	
A	Overall width of cooktop	35 ⁷ / ₁₆ "	(900)
B	Overall depth of cooktop	20 ⁷ / ₈ "	(530)
C	Height of chassis below top of counter (including height of conduit junction)	4 ¹ / ₄ "	(108)
D	Width of chassis	34 ¹ / ₈ "	(866)
E	Depth of chassis (including spacers)	19 ⁵ / ₈ "	(498)

Product dimensions and specifications are listed as a guide only. For complete installation instructions and specifications, refer to the product Use & Care Guide/Installation Instructions available at www.fisherpaykel.com

Fisher & Paykel

fisherpaykel.com
1.888.936.7872

CUTOUT, CLEARANCE AND CABINETY DIMENSIONS

CE365DBX1

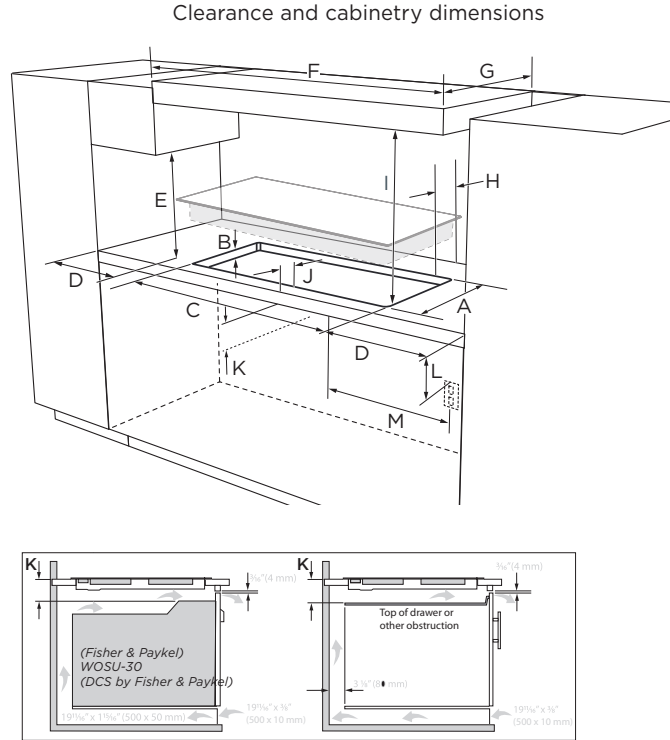


Fig. 1 Minimum clearances and ventilation requirements - oven installed below cooktop

Fig. 2 Minimum clearances and ventilation requirements - drawer or other obstruction below

DIMENSIONS INCHES (MM)

			CE365DBX1	
A	Overall depth of cutout		20 1/16"	(510)
B	Thickness of countertop* (to enable the cooktop to be fastened with the supplied clamps)	min.	1 3/16"	(30)
	* If the countertop is thicker than 1 9/16" (40mm), recess its underside to within the thickness range 'H'.	max.	1 1/16"	(40)
C	Overall width of cutout		34 1/4"	(870)
D	Min. clearance from side edges of cutout to: nearest combustible surface		2 3/16"	(65)
E	Min. clearance from countertop to: overhead cabinet not directly above the cooktop		18"	(457)
F	Min. distance between cabinets either side of the cooktop		36"	(915)
G	Maximum depth of overhead cabinetry		13"	(330)
H	Min. clearance from rear edge of cutout to: nearest combustible surface		2 3/16"	(55)
I	Min. clearance from glass surface to: overhead cabinet centered above the cooktop (unprotected)* overhead cabinet centered above the cooktop (protected)*		30" 24"	(762) (610)
J	Min. distance from front edge of cutout to: front edge of counter		1"	(25)
K	Min. clearance below top of countertop to: top of oven installed below cooktop (IMPORTANT see Fig.1 and Note #1 following) top of drawer or other obstruction below cooktop (see Fig.2)		4 1/2" 4 1/2"	(115) (115)
L	Min. clearance below top of countertop to junction box		9"	(230)
M	Maximum distance from center rear of cutout to center of junction box**		30"	(762)

Note #1 Only the oven models indicated in Fig.1 below may be installed below the cooktop.

Product dimensions and specifications are listed as a guide only. For complete installation instructions and specifications, refer to the product Use & Care Guide/Installation Instructions available at www.fisherpaykel.com

Fisher & Paykel

fisherpaykel.com
1.888.936.7872