

COOKSURFACE DIMENSIONS

CG363MLDNGB1, CG363MLNGB1

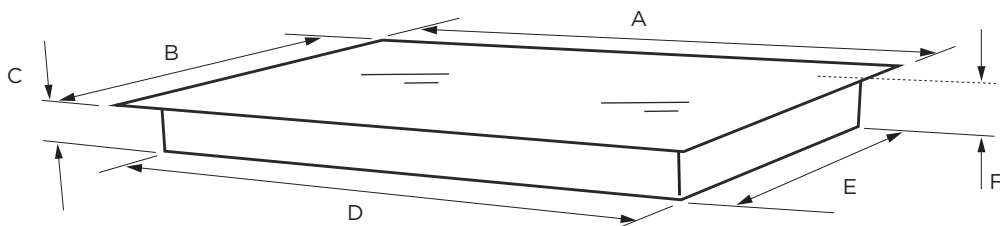

DIMENSIONS INCHES (MM)

	CG363MLNGB1		CG363MLDNGB1	
A Overall width of cooktop	35 1/2"	(900)	35 1/2"	(900)
B Overall depth of cooktop	16 1/8"	(410)	20 7/8"	(530)
C Height of chassis (below top of counter)	3 1/2"	(89)	3 1/2"	(89)
D Width of chassis	33 1/16"	(856)	33 1/16"	(856)
E Depth of chassis	15 1/8"	(384)	18 7/8"	(480)
F Overall height of product (including retracted dials/pan supports)	3 3/4"	(96)	3 3/4"	(96)

Product dimensions and specifications are listed as a guide only. For complete installation instructions and specifications, refer to the product Use & Care Guide/Installation Instructions available at www.fisherpaykel.com


Fisher & Paykel

fisherpaykel.com
1.888.936.7872


COOKSURFACE CABINET DIMENSIONS

CG363MLDNGB1, CG363MLNGB1

Cutout dimensions

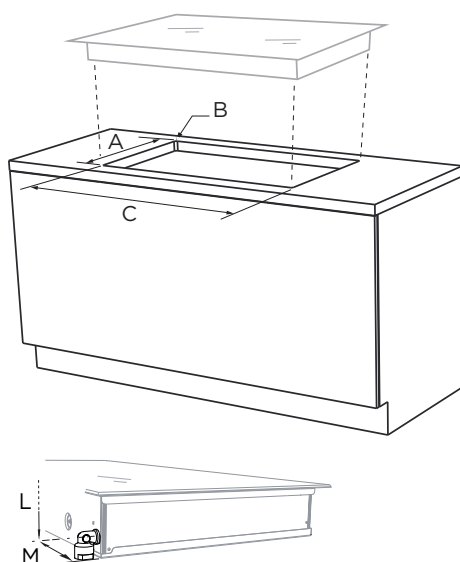

Clearance and cabinetry dimensions

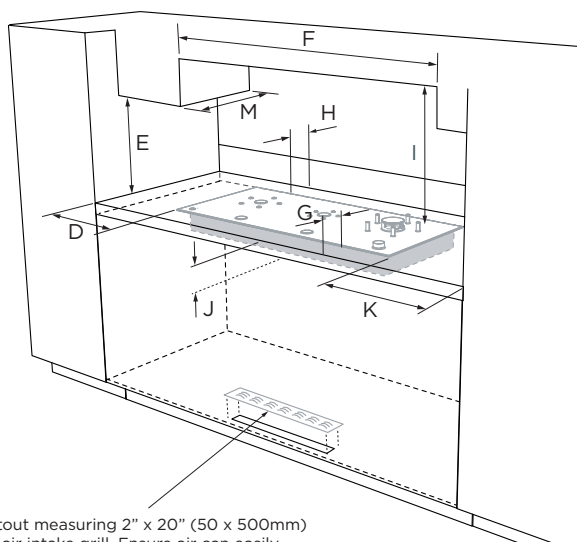

Cutout measuring 2" x 20" (50 x 500mm) for air intake grill. Ensure air can easily enter the area around the base of the product from the room in which the product is installed.

DIMENSIONS INCHES (MM)

	CG363MLNGB1		CG363MLDNGB1	
A Overall depth of cutout	15 ³ / ₁₆ "	(390)	19 ⁷ / ₁₆ "	(494)
B Corner radius of cutout	max. ³ / ₈ "	(10)	max. ³ / ₈ "	(10)
C Overall width of cutout	34 ¹ / ₁₆ "	(865)	34 ¹ / ₁₆ "	(865)
D Min. clearance from left edge of product to nearest vertical surface	2 ³ / ₈ "	(60)	2 ³ / ₈ "	(60)
E Min. vertical distance between counter and cabinet extending above the counter	18"	(457)	18"	(457)
F Min. distance between overhead cabinets installed to either side of product	36"	(915)	36"	(915)
G Min. distance from front edge of counter to front edge of product	1 ¹ / ₄ "	(32)	1 ¹ / ₄ "	(32)
H Minimum clearance from rear edge of product to: nearest combustible surface nearest non-combustible surface	1 ¹ / ₄ "	(32)	¹ / ₂ "	(13)
	less than 1 ¹ / ₄ "	(32)	less than ¹ / ₂ "	(13)
I Minimum clearance from the glass surface to combustible surface centred above the cooking surface.	30"	(762)	30"	(762)
J Min. clearance below top of countertop to: nearest combustible surface Fisher & Paykel oven or nearest non-combustible surface	4 ¹ / ₂ "	(115)	4 ¹ / ₂ "	(115)
	4"	(100)	4"	(100)
K Minimum clearance from right edge of product to nearest vertical surface	3 ¹ / ₈ "	(80)	3 ¹ / ₈ "	(80)
L Distance from top of counter to center of gas inlet on product	2 ¹ / ₂ "	(64)	2 ¹ / ₂ "	(64)
M Distance from edge of chassis to gas inlet on product (* CG363ML models only: If countertop thickness exceeds 2" (50 mm), additional cutout space will be required to accommodate the fitted elbow).	³ / ₄ "	(20)	³ / ₄ "	(20)

Note: Ensure there is a grounded power outlet within 35 ¹/₂" (900 mm) of the center rear of the product. A suitable flexible hose must be used between the product gas inlet and the connector on the wall. The connector should be 25 ¹/₂"-29 ¹/₂" (650 - 750mm) above the floor and towards the left-hand end of the product. It should be accessible with the product installed.

Product dimensions and specifications are listed as a guide only. For complete installation instructions and specifications, refer to the product Use & Care Guide/Installation Instructions available at www.fisherpaykel.com

Fisher & Paykel

fisherpaykel.com
1.888.936.7872