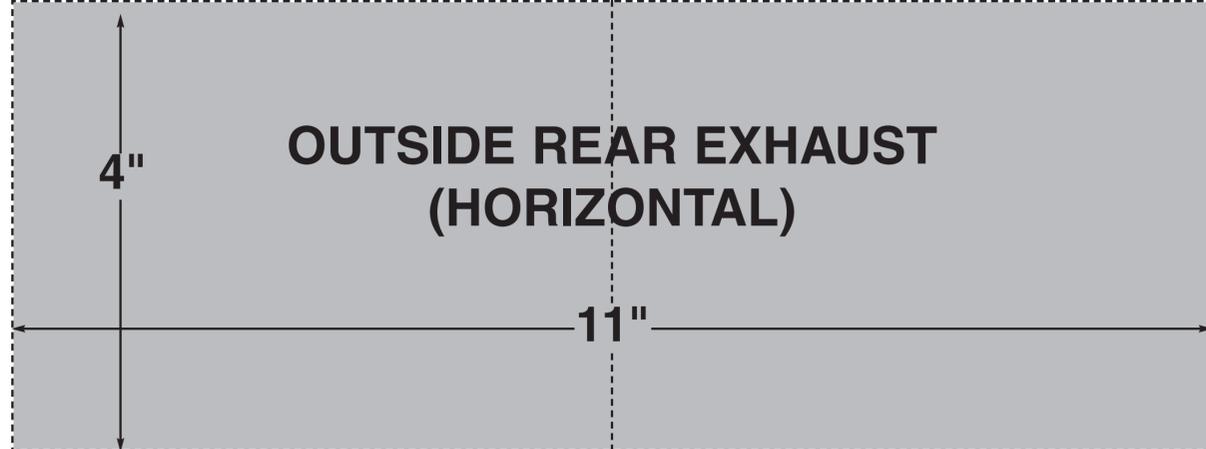


A**B**

66" or more from the floor.
30" or more from the cooking surface.

15 1/8"**E****E**

This oven **MUST** be connected to at least one wall stud
– this is a minimum requirement.

Connect marks to as many studs as possible.

MINIMUM 30 INCHES REQUIRED**30"**

WALL TEMPLATE

Place on Wall before placing Top Cabinet Template.

1. Mark the location of the wall studs. Refer to the Installation Instructions. Do not attempt to install this microwave oven if a wall stud cannot be located.
2. Use tape or pins to attach this template to the wall being sure that the upper edge is exactly at the bottom of the top cabinet and centered. The top edge of the template must be at least 66" from the floor and 30" or more from the cooking surface. The bottom edge of the template must meet or be higher than the top of any range backsplash – do not put the template behind the range backsplash.

NOTE:

1. If cabinets are not plumb, adjust template to cabinets.
2. If front edge of cabinet is lower than back edge, adjust template so that it is level with cabinet front.
3. Clearly and accurately mark wall stud location on the template. If stud location matches any location marked + in areas lettered A,B,C,D,E, or F drill a 3/32" hole into the stud for a wood screw.

Drill a 5/8" hole at A, B, C and D wherever there is **NO** stud. Additional toggle bolts may be purchased from most hardware stores and used in the area between the two E's or the two F's to give added support for weakened or damaged walls.

4. For Vertical and Recirculating Exhaust applications, go to the Top Cabinet Template Instructions. For Horizontal Exhaust, cut out rectangular hole 4" x 11" along broken lines in area labeled Outside Rear Exhaust (Horizontal) and then go to the Top Cabinet Template Instructions.

C**F****F****D****2"**