


FISHER & PAYKEL

DATA SHEET 36" Professional Drop In Gas Cooktop


Model no:

CDV2-365

(refer page 3 for metric measurements)

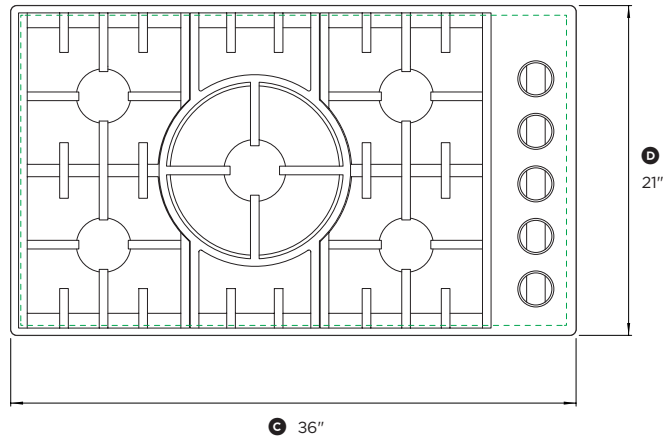


PLAN VIEW

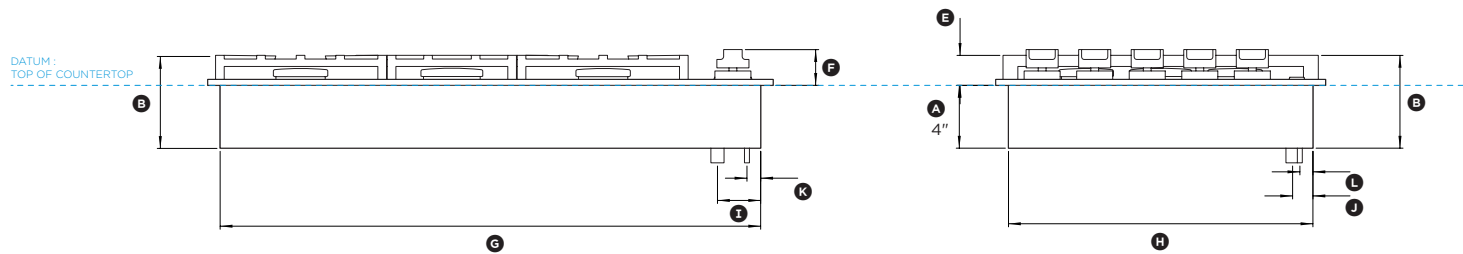

FRONT VIEW

PROFILE VIEW



| Product Dimensions | in |
|--|----------|
| Ⓐ Height of chassis (below top of counter) | 4" |
| Ⓑ Overall height of product (bottom of chassis to top of grates) | 5 15/16" |
| Ⓒ Overall width of cooktop | 36" |
| Ⓓ Overall depth of cooktop | 21" |
| Ⓔ Height from countertop datum to top of cooking surface | 1 15/16" |
| Ⓕ Height from countertop datum to top of dials | 2 1/4" |
| Ⓖ Width of chassis | 34 7/16" |
| Ⓗ Depth of chassis | 19 3/8" |
| Ⓛ Distance from right edge of chassis to center line of gas inlet | 2 3/4" |
| Ⓜ Distance from rear edge of chassis to center line of gas inlet | 1 5/16" |
| Ⓝ Distance from right edge of chassis to center line of power cord | 7/8" |
| Ⓞ Distance from rear edge of chassis to center line of power cord | 13/16" |

| Cutout Dimensions | in |
|---------------------------|---------|
| Overall width of cutout * | 34 3/4" |
| Overall depth of cutout * | 19 3/4" |

* Note cutout position is centred to the cooktop width and depth.

INDICATES PRODUCT DATUM -----
INDICATES CUTOUT -----

DATE: **24.04.2018**

IMPORTANT: Throughout this guide, dimensions may vary by $\pm 2\text{mm}$ (1/16"). Read the installation guide for detailed information on installing the product. For full installation instructions and specifications visit fisherpaykel.com

FISHER & PAYKEL


DATA SHEET 36" Professional Drop In Gas Cooktop

Model no:
CDV2-365
(refer page 4 for metric measurements)


| Clearance Dimensions | in |
|--|------------|
| Ⓐ Minimum width of ventilation hood installed above cooktop - not shown* | 36" |
| Ⓑ Minimum vertical distance between countertop and cabinet extending above counter | 18" |
| Ⓒ Minimum clearance from left and right edge of cutout to nearest vertical combustible surface | 12" |
| Ⓓ Minimum clearance from rear edge of cutout to nearest combustible surface | 7" |
| Ⓔ Minimum clearance from cooking surface to: - combustible surface centered above the cooking surface - non-combustible surface centered above the cooking surface | 36" 30" |
| Ⓕ Maximum overall depth of overhead cabinetry | 13" |

| Specifications | |
|----------------------|--------------------------------------|
| Electrical | |
| Supply | 120 VAC, 60Hz |
| Service | 15 amp circuit |
| Gas - Natural | |
| Connection | 1/2" NPT Minimum 5/8" dia. flex line |
| Supply Pressure | Supply Pressure: 6" to 9" W.C. |
| Gas - LP | |
| Connection | 1/2" NPT Minimum 5/8" dia. flex line |
| Supply Pressure | 11" to 14" W.C. |

| Location of Electrical and Gas Supply | in |
|--|-----|
| Ⓔ Distance from benchtop to electrical and gas supply area | 5" |
| Ⓕ Width of electrical and gas supply area | 18" |

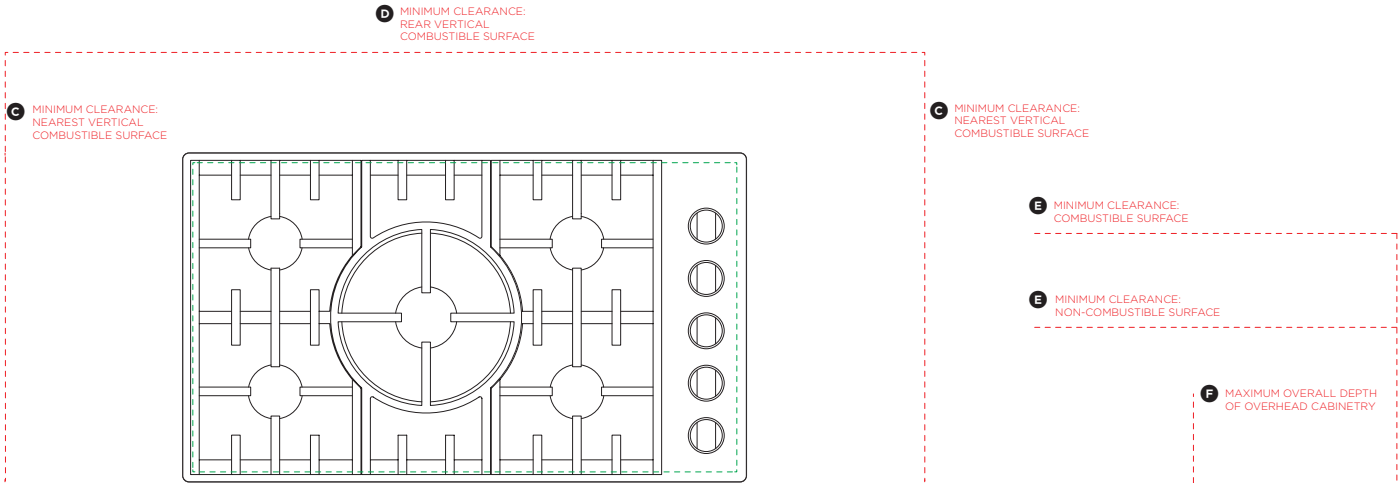


PLAN VIEW

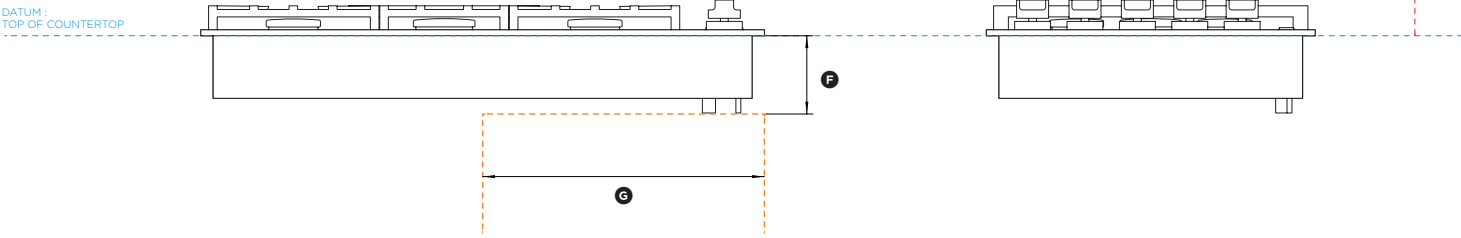

FRONT VIEW

PROFILE VIEW



INDICATES PRODUCT DATUM -----
INDICATES CUTOUT -----
INDICATES CLEARANCES -----
INDICATES GAS AND ELECTRICAL SUPPLY AREA -----

DATE: **24.04.2018**

IMPORTANT: Throughout this guide, dimensions may vary by ±2mm (1/16"). Read the installation guide for detailed information on installing the product. For full installation instructions and specifications visit fisherpaykel.com


FISHER & PAYKEL

DATA SHEET 36" Professional Drop In Gas Cooktop


Model no:

CDV2-365

(refer page 1 for imperial measurements)

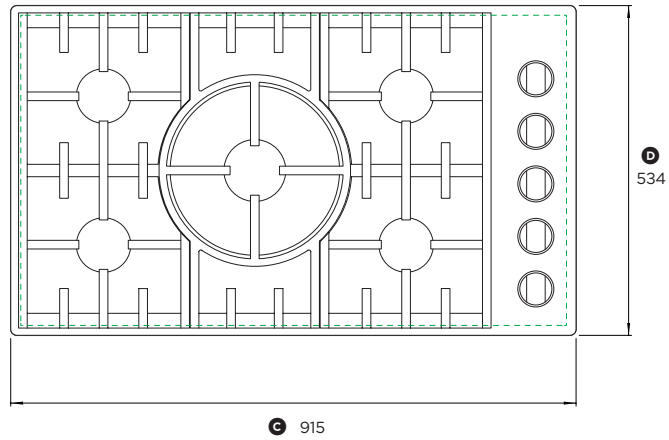

PLAN VIEW

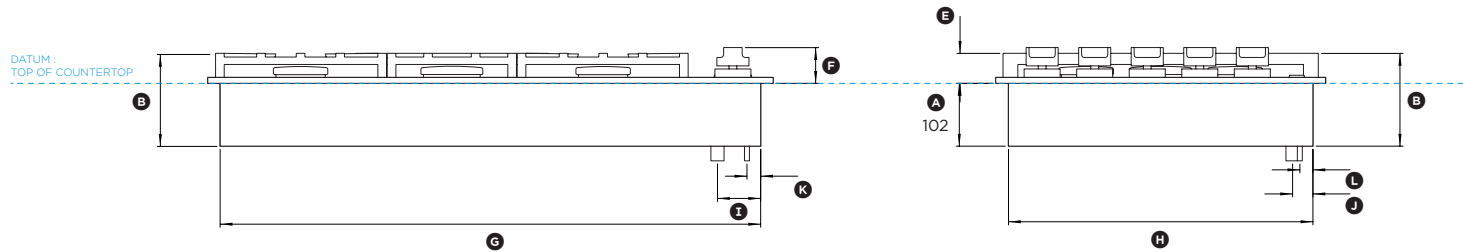

FRONT VIEW

PROFILE VIEW



| Product Dimensions | mm |
|--|-----|
| Ⓐ Height of chassis (below top of counter) | 102 |
| Ⓑ Overall height of product (bottom of chassis to top of grates) | 150 |
| Ⓒ Overall width of cooktop | 915 |
| Ⓓ Overall depth of cooktop | 534 |
| Ⓔ Height from countertop datum to top of cooking surface | 49 |
| Ⓕ Height from countertop datum to top of dials | 58 |
| Ⓖ Width of chassis | 874 |
| Ⓜ Depth of chassis | 493 |
| Ⓣ Distance from right edge of chassis to centre line of gas inlet | 70 |
| Ⓤ Distance from rear edge of chassis to centre line of gas inlet | 33 |
| Ⓧ Distance from right edge of chassis to centre line of power cord | 22 |
| Ⓦ Distance from rear edge of chassis to centre line of power cord | 21 |

| Cutout Dimensions | mm |
|---------------------------|-----|
| Overall width of cutout * | 883 |
| Overall depth of cutout * | 502 |

* Note cutout position is centred to the cooktop width and depth.

INDICATES PRODUCT DATUM -----
INDICATES CUTOUT -----

DATE: **24.04.2018**

IMPORTANT: Throughout this guide, dimensions may vary by $\pm 2\text{mm}$ (1/16"). Read the installation guide for detailed information on installing the product. For full installation instructions and specifications visit fisherpaykel.com

FISHER & PAYKEL

DATA SHEET 36" Professional Drop In Gas Cooktop

Model no:

CDV2-365

(refer page 2 for imperial measurements)

Clearance Dimensions

| | mm |
|--|-----|
| Ⓐ Minimum width of ventilation hood installed above cooktop - not shown* | 915 |
| Ⓑ Minimum vertical distance between countertop and cabinet extending above counter | 457 |
| Ⓒ Minimum clearance from left and right edge of cutout to nearest vertical combustible surface | 305 |
| Ⓓ Minimum clearance from rear edge of cutout to nearest combustible surface | 178 |
| Ⓔ Minimum clearance from cooking surface to: - combustible surface centered above the cooking surface | 915 |
| - non-combustible surface centered above the cooking surface | 762 |
| Ⓕ Maximum overall depth of overhead cabinetry | 330 |

Specifications

Electrical

| | |
|---------|----------------|
| Supply | 120 VAC, 60Hz |
| Service | 15 amp circuit |

Gas - Natural


| | |
|-----------------|--------------------------------------|
| Connection | 1/2" NPT Minimum 5/8" dia. flex line |
| Supply Pressure | Supply Pressure: 6" to 9" W.C. |

Gas - LP


| | |
|-----------------|--------------------------------------|
| Connection | 1/2" NPT Minimum 5/8" dia. flex line |
| Supply Pressure | 11" to 14" W.C. |

Location of Electrical and Gas Supply

| | mm |
|--|-----|
| Ⓕ Distance from benchtop to electrical and gas supply area | 127 |
| Ⓖ Width of electrical and gas supply area | 457 |

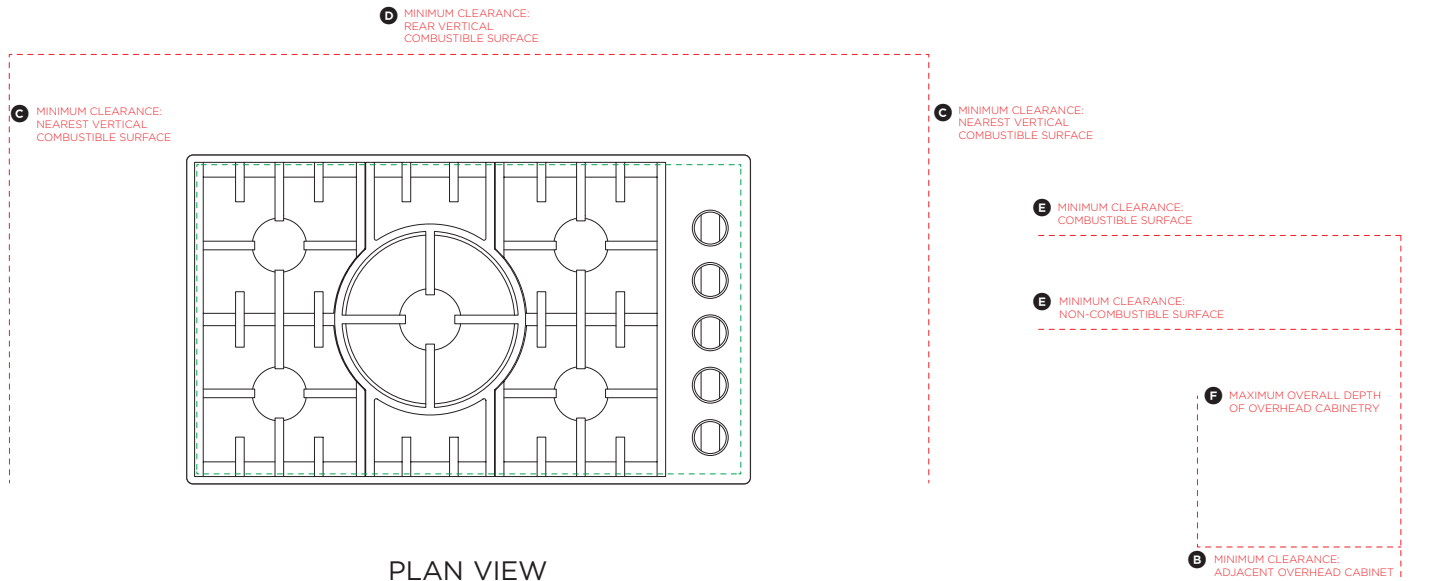

PLAN VIEW

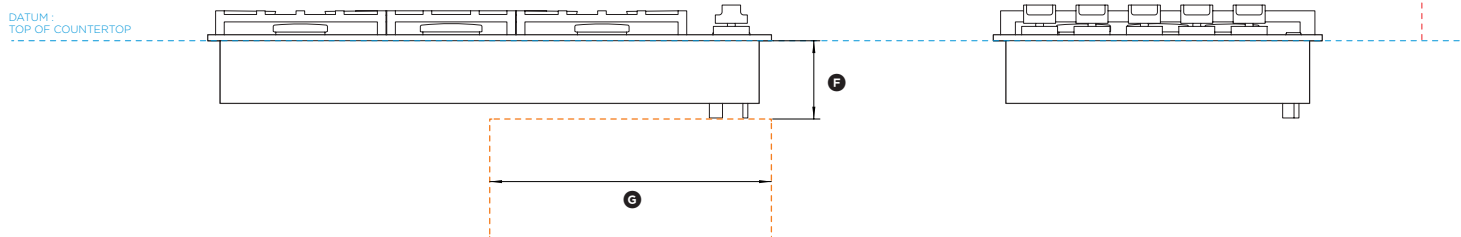

FRONT VIEW

PROFILE VIEW



INDICATES PRODUCT DATUM -----

INDICATES CUTOUT -----

INDICATES CLEARANCES -----

INDICATES GAS AND ELECTRICAL SUPPLY AREA -----

DATE: **24.04.2018**

IMPORTANT: Throughout this guide, dimensions may vary by $\pm 2\text{mm}$ (1/16"). Read the installation guide for detailed information on installing the product. For full installation instructions and specifications visit fisherpaykel.com