

FISHER & PAYKEL

DATA SHEET 762mm Integrated Column Fridge / Freezer

Model nos:

RS7621SRK1 / RS7621FRJK1

NOTE: Left hand hinge model is a mirrored version of image shown.

RS7621SLK1 / RS7621FLJK1

Product Dimensions	mm
Ⓐ Overall height of product	2134
Ⓑ Overall width of product	756
Ⓒ Overall depth of product (excl. front door panels)	610
Ⓓ Height from bottom datum to bottom of door	50 - 152
Ⓔ Depth of toekick (excl. door front and toekick panels)	68 - 101

Custom Panel Dimensions*	mm
Ⓔ Height of door panel	1978 - 2080
Ⓘ Width of door panel - singlw install	756
Width of door panel - dual install	757.5
Ⓣ Height of custom toekick panel**	50 - 152
Ⓟ Width of custom toekick panel	759
Ⓡ Depth of custom panels	min 16 max 25
Maximum weight of door panel (including handle***)	30kg

* Custom panels to be manufactured & fitted by cabinetmaker

** 100mm tall stainless steel toekick panel available. Adjust the height of the door panel accordingly.

*** Door handle kit is available as an optional accessory.


Clearance Dimensions	mm
Minimum cabinetry gap clearance from edge of door panel	3
Overall height of cavity	2134
Overall width of cavity	762
Minimum overall depth (shallow) of cavity when services are located outside of cavity****	635
Minimum overall depth (deep) of cavity when services are located at rear of cavity****	650
Minimum door clearance to adjacent wall (115° - full internal access)	419
Minimum door clearance at 90° open, measured from front of door	813

****Assumes a door panel depth of 19mm.

INDICATES CAVITY CLEARANCES -----
INDICATES PRODUCT DATUM - - - - -

DATE: 10.10.2018

IMPORTANT NOTE: Throughout this guide, dimensions may vary by ±2mm (1/16"). Please read the installation manual for detailed information on installing the product. For full installation instructions & specifications visit fisherpaykel.com

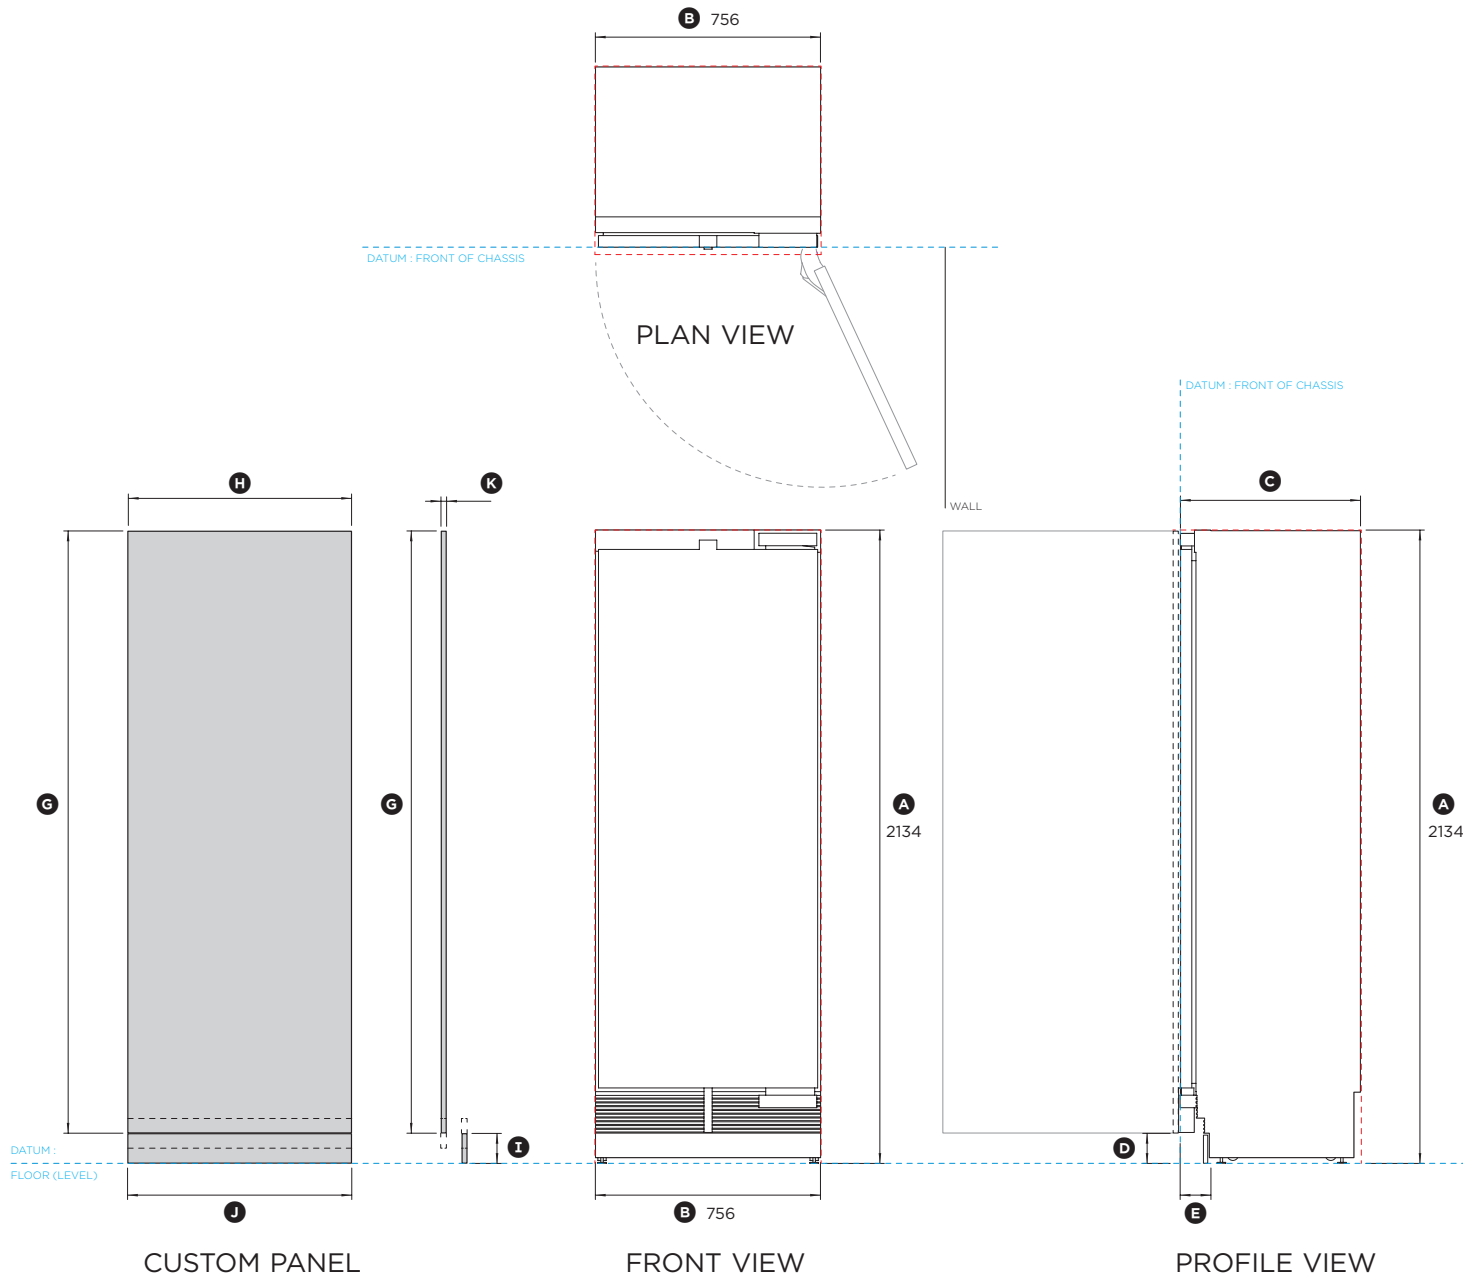

0 100 200 400
millimetres